



GROWING TOGETHER

TECHNICAL DATABOOK 2024



INDUSTRIAL & CONSTRUCTION TIRES





2024 Technical DataBook

INDUSTRIAL & CONSTRUCTION TIRES



Range



FORKLIFT

Radial Bias Solid



LIFTMAX LM 81

Pag. 42



FL 252

Pag. 48



MP 590

Pag. 50



MAGLIFT ECO

Pag. 92



MAGLIFT PREMIUM

Pag. 98



MAGLIFT ECO RIB

Pag. 100



PL 801

Pag. 52



POWER TRAX HD

Pag. 62



POWER TRAX HD SMOOTH

Pag. 70



MAGLIFT RIM GUARD

Pag. 102



MAGLIFT GROSS

Pag. 104



SNOW GRIP

Pag. 72



SUPER TRAX HD

Pag. 74



MAGLIFT

Pag. 76





Range



BACKHOE LOADER

Radial Bias



MULTIMAX MP 522

Pag. 108



RT 747 AGRO INDUSTRIAL

Pag. 114



BK 826

Pag. 116



TR 459

Pag. 142



TR 461

Pag. 148



TR 463

Pag. 152



BK 6060

Pag. 120



MP 570

Pag. 122



AT 603

Pag. 124



EM 937 (L)

Pag. 154



XL GRIP

Pag. 158



AT 621

Pag. 128



AT 625

Pag. 136



CON STAR



Pag. 138



Range



COMPACT LOADER

 Radial  Bias



MULTIMAX MP 522

 Pag. 164



MULTIMAX MP 527

 Pag. 170



RT 747 AGRO INDUSTRIAL

 Pag. 174



MP 600

 Pag. 198



SNOW RIDE (A)

 Pag. 200




MULTIMAX MP 525

 Pag. 202




AT 603

 Pag. 176




AT 621

 Pag. 180




AT 625

 Pag. 188




CON STAR

 Pag. 190




MP 570

 Pag. 194



MP 590

 Pag. 196





Range



LOADER

Radial Bias



EARTHMAX SR 22

Pag. 206



EARTHMAX SR 22 AS

Pag. 208



EARTHMAX SR 23

Pag. 210



BK-LOADER 53

Pag. 228



ROCK GRIP

Pag. 230



XL GRIP

Pag. 232



EARTHMAX SR 25 PLUS

Pag. 212



EARTHMAX SR 31

Pag. 214



GR 288

Pag. 216



SNOW RIDE (B)

Pag. 238



SNOW RIDE PLUS

Pag. 240



ROCK STAR (L-4)

Pag. 242



EM 936 LOADER SPECIAL

Pag. 218



EM 937

Pag. 220



LOADER PLUS (L-3)

Pag. 224





Range



COMPACTOR



Bias



PAC MASTER

Pag. 246



PAC MASTER PLUS

Pag. 250



TR 387

Pag. 252



TR 387 IND

Pag. 258



TR 390

Pag. 260



TR 390 IND

Pag. 262



TR 391

Pag. 264



EM 933 SUPER

Pag. 268



EM 934

Pag. 270



EM 936

Pag. 272



EM 936 SUPER

Pag. 276



EM 938

Pag. 278



EM 939

Pag. 280



TR 678

Pag. 282



TR 678 IND

Pag. 284



MP 570

Pag. 286

EXCAVATOR



Bias





Range



EXCAVATOR

◆ Bias ◆ Solid



LUG STAR



Pag. 288



MAGLIFT EXCAVATOR



Pag. 290

GRADER

◆ Radial



EARTHMAX SR 22



Pag. 294



EARTHMAX SR 22 AS



Pag. 296



EARTHMAX SR 23



Pag. 298



EARTHMAX SR 25 PLUS



Pag. 300



MULTIMAX MP 525





Pag. 302



Range



SKID STEER

 Radial  Bias



GIANT TRAX

 Pag. 306



MUD POWER HD

 Pag. 308



JUMBO TRAX HD

 Pag. 310



SNOW RIDE (A)

 Pag. 332



SURE TRAX HD

 Pag. 334



SKID MAX SR-SKIDDER

 Pag. 336



SKID POWER

 Pag. 312



SKID POWER (CHEVRON)

 Pag. 316



SKID POWER HD (A)

 Pag. 318



POWER TRAX HD (SS)

 Pag. 338



SKID POWER HD (B)

 Pag. 326



SKID POWER SK

 Pag. 328



SKID POWER PLUS

 Pag. 330



Range



TELEHANDLER

Radial Bias



MULTIMAX MP 569

Pag. 342



MULTIMAX MP 522

Pag. 344



MULTIMAX MP 527

Pag. 350



MP 567

Pag. 418



MP 590

Pag. 428



MP 600

Pag. 430



MULTIMAX MP 529

Pag. 354



RT 747 AGRO INDUSTRIAL

Pag. 356



AS 504

Pag. 358



TR 461

Pag. 434



EM 936

Pag. 438



EM 936 LOADER SPECIAL

Pag. 442



CON STAR

Pag. 410



GRIP STAR

Pag. 414



LIFT STAR PLUS

Pag. 416



MULTIMAX MP 525

Pag. 444







Range



LIGHT TRUCK

 Radial  Bias



LT TR 182

 Pag. 448



TUF LUG

 Pag. 450



MULTIMAX MP 519

 Pag. 452



IT 400

 Pag. 456



LP 450

 Pag. 458



MULTIMAX SR 261

 Pag. 460

LOW PLATFORM

 Radial  Bias 





Range



TRAILER

Radial Bias



LIFTMAX LM 63

Pag. 464



PORTMAX PT 93

Pag. 466



BK 826

Pag. 468



RIB F3

Pag. 486



SAND KING

Pag. 488



SAND MASTER

Pag. 490



BK 6060

Pag. 472



COLT

Pag. 474



FLOTATION TR 675

Pag. 476



SAND STAR

Pag. 492



SUPER SAND

Pag. 494



TUF LUG

Pag. 496



CON TRAILER

Pag. 478



INDUSTRIAL RIB F3

Pag. 482



MULTI RIB

Pag. 484



RIB 324

Pag. 498



TR 387 IND

Pag. 500



TR 678

Pag. 502



Range



TRAILER

Radial Bias Solid



TR 678 IND

Pag. 504



AW 711 IND

Pag. 506



FL 695

Pag. 510



RIDEMAX FL 690

Pag. 512



MAGLIFT SMOOTH

Pag. 514



POWERTRAILER SR 331

Pag. 516

MILITARY TRUCK

Radial Bias



MT 612

Pag. 520



MT 617

Pag. 522



MULTIMAX MT 518

Pag. 524



Range



UNIVERSAL VEHICLE MULTIPURPOSE

Radial



EARTHMAX SR 33

Pag. 528



EARTHMAX SR 33 PLUS

Pag. 530



EARTHMAX SR 331

Pag. 532



MULTIMAX MP 525

Pag. 534



MULTIMAX MP 540

Pag. 536

MOBILE CRANE

Radial Bias



AIROMAX AM 27

Pag. 540



AIROMAX AM 543

Pag. 542



CRANE SPECIAL

Pag. 544



RM 2002

Pag. 546



ROCK STAR (L-4)

Pag. 548



Range

BKT Port Range



RTG CRANE

Bias



XL GRIP (IND-3)

Pag. 552

EMPTY CONTAINER HANDLER

Radial Bias



EM 937 (IND-3)

Pag. 558



XL GRIP (IND-3)

Pag. 560



ROCK GRIP IND-4 (ECH)

Pag. 562



ROCK STAR (IND-4)

Pag. 564



POWER TRAX HD

Pag. 566



POWER TRAX HD SMOOTH

Pag. 568



POWER TRAX

Pag. 570



BKT Port Range



REACH STACKER

 Radial  Bias



PORTMAX PM 90

 Pag. 574



PORT KING CLASSIC

 Pag. 576



PORT KING PLUS

 Pag. 578




PORTMAX PM 93 PLUS

 Pag. 594




CONTAINER KING

 Pag. 580




ROCK GRIP IND4 (RS)

 Pag. 582




SM 54 M (IND-4S)

 Pag. 584




SM 55 (IND-5S)

 Pag. 586




SM 54 SUPER (IND-4S)

 Pag. 588



SM 54 (IND-4S)

 Pag. 590

STRADDLE CARRIER

 Radial





BKT Port Range



TERMINAL TRACTOR



Radial



PORTMAX PT 93



Pag. 598



TOW TRACTOR



Radial



LIFTMAX LM 63



Pag. 602





BKT Port Range



ROAD RAIL EQUIPMENT



Bias



ROCK STAR (SB SPL)



Pag. 606



LUG STAR



Pag. 608



Legend of icons

TECHNOLOGIES

All Steel	Aramid Belted	Block Pattern	Deep Tread	Extra Deep Tread
Hard Compound	Heavy Duty	High Speed	Larger Footprint	IF Technology
More Lugs	Reinforced Bead	Reinforced Carcass	Snow Pattern	Special Compound
Special Antistatic Compound	Steel Belted	Strong Casing	VF Technology	

PERFORMANCE

Comfort	Cut Resistance	Cut and Chip Resistance	Durability	Excellent Flotation
For Muddy Ground	Fuel Economy	Handling & Comfort	Hard Surfaces	Heavy Duty
Heat Resistance	High Load Capacity	High Puncture Resistance	High Mileage	Ice and Snow
Low Rolling Resistance	Multi-Purpose Tires	No Slippage	On/Off Road	Reduced Soil Compaction
Road Oriented	Self-Cleaning	Stability	Steering Control	Stubble Resistance
Traction	Traction on Sand			



How to read technical data

Tire size

This data indicates tire size according to international standards.

Type

This parameter indicates whether the tire is tubeless (TL) or the type of air chamber mounted.

STAR RATING

Star rating is a symbol, used for OTR tires, to identify a reference inflation pressure, for a given tire size and service condition, and its corresponding load.

PR

The PR parameter states for "Ply Rating" and is an expression of the tire's load capacity, primarily used for conventional tires.

LI/SS

LOAD INDEX / SPEED SYMBOL

The load index is a numeric code that defines the tire's maximum loading capacity in kg. For each tire type/size, the loading capacity is always related to a specific inflation pressure as defined by ETRTO standards and manufacturer specifications.

Speed Symbol: the speed code is a symbol that indicates the maximum speed admitted at the given load index, following any other specific conditions defined by the tire manufacturer.

Version

The Version parameter indicates whether the tyre is a standard version or has specific characteristics for a different use.



S.W.

SECTION WIDTH

This parameter indicates the outer sidewall distance without taking into consideration the prominences due to tire code marking. The section width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

OVERALL WIDTH

This parameter indicates a tire's section width at its largest point including all prominences such as tire code marking, sidewall lettering, tire brand, etc. The overall width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.



O.W.

OVERALL DIAMETER

This parameter is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.



O.D.

SLR - STATIC LOADED RADIUS

This parameter indicates the vertical distance between the ground and the tire rotation axis. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.



SLR

ROLLING CIRCUMFERENCE

indicates the distance the tire travels in one revolution



RC

RIM Rec. parameter indicates the recommended rim size for the tire according to ETRTO.

RIM Alt. parameter indicates the alternative rim size for the tire according to technical standard.



RIM Rec./Alt.



FORKLIFT



Radial

LIFTMAX LM 81



LIFTMAX LM 81 has been specially designed for forklift equipment in material handling and industrial applications. This All Steel radial tire offers lower vibration, and greater stability as well as increased durability. The special antistatic tread compound provides excellent wear resistance even under the most demanding operating conditions.

Ø"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
										Rec.	Alt.
8"	180/70 R 8	TL	-	125 A5	STD	170	453	-	-	4.33 R	-
	5.00 R 8	TL	-	111 A5	STD	138	471	-	-	3.00 D	3.25 3.75 I
9"	6.00 R 9	TL	-	121 A5	STD	160	540	-	-	4.00 E	-
10"	225/75 R 10	TL	-	142 A5	STD	220	595	-	-	6.50 F	-
	6.50 R 10	TL	-	128 A5	STD	178	590	-	-	5.00 F; 5.50 F	-
12"	250/75 R 12	TL	-	152 A5	STD	260	680	-	-	8.0	-
	7.00 R 12	TL	-	136 A5	STD	195	675	-	-	5.00 S	-
15"	225/75 R 15	TL	-	149 A5	STD	226	712	-	-	7.00	-
	250/70 R 15	TL	-	153 A5	STD	230	735	-	-	7.00	-



FORKLIIFT





FORKLIFT

Radial

LIFTMAX LM 81



LIFTMAX LM 81 has been specially designed for forklift equipment in material handling and industrial applications. This All Steel radial tire offers lower vibration, and greater stability as well as increased durability. The special antistatic tread compound provides excellent wear resistance even under the most demanding operating conditions.

Ø 8"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	10
150/75 R 8	TL	-	113 A5	STD	150	430	-	-	4.33 R	-	25	1150	
											40	1030	
150/75 R 8 IMP	TL	-	109 A8	STD	150	430	-	-	4.33 R	-	25	1150	
											40	1030	
180/70 R 8	TL	-	125 A5	STD	170	453	-	-	4.33 R	-	25	1650	
											40	1400	
180/70 R 8 IMP (18X7 R 8)	TL	-	120 A8	STD	170	453	-	-	4.33 R	-	25	1090	
											40	1090	
5.00 R 8	TL	-	111 A5	STD	138	471	-	-	3.00 D	3.25 I; 3.75 I	25	1090	
											40	1090	
Ø 9"	200/75 R 9	TL	-	134 A5	STD	202	530	-	-	6.00 E	-	25	2120
												40	2120
6.00 R 9	TL	-	121 A5	STD	160	540	-	-	4.00 E	-	25	1450	
											40	1450	
Ø 10"	225/75 R 10	TL	-	142 A5	STD	220	595	-	-	6.50 F	-	25	2650
												40	2650
6.50 R 10	TL	-	128 A5	STD	178	590	-	-	5.00F	5.50F	25	1800	
											40	1800	
Ø 12"	250/75 R 12	TL	-	152 A5	STD	260	680	-	-	8.0	-	25	3550
												40	3550
7.00 R 12	TL	-	136 A5	STD	195	675	-	-	5.00 S	-	25	2240	
											40	2240	

STD: Standard

Technologies



Performance





LIFTMAX LM 81

Ø 15"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
												km/h / bar	10
225/75 R 15 (28 X 9 R 15)	TL	-	149A5	STD	226	712	-	-	7.00	-	25	3250	
											25	3650	
250/70 R 15	TL	-	153A5	STD	230	735	-	-	7.00	-	25	5150	
											25	2725	
315/70 R 15	TL	-	165A5	STD	305	834	-	-	8.00	-	25	3000	
											25	3650	
7.00 R 15	TL	-	143A5	STD	199	745	-	-	5.50	5.00	25	7100	
											25	7100	
7.50 R 15	TL	-	146A5	STD	212	778	-	-	6.00	6.5	25	7100	
											25	7100	
8.25 R 15	TL	-	153A5	STD	234	836	-	-	6.5	7.0	25	7100	
											25	7100	
Ø 20"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
												km/h / bar	10
9.00 R 20	TL	-	160A5	STD	255	1028	-	-	7.0	7.5	25	4500	
											25	5300	
10.00 R 20	TL	-	166A5	STD	275	1066	-	-	7.50	-	25	6000	
											25	7100	
11.00 R 20	TL	-	170A5	STD	288	1092	-	-	8.00	8.5	25	7100	
											25	7100	
12.00 R 20	TL	-	176A5	STD	314	1134	-	-	8.50	8.0	25	7100	
											25	7100	
12.00 R 20	TL	-	176A5	IND	314	1134	-	-	8.50	8.0	25	7100	
											25	7100	

STD: Standard - IND: Industrial

Technologies



Special Antistatic Compound

Performance



Stability



Durability





LIFTMAX LM 81

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	10
Ø 24"	12.00 R 24	TT	-	178A5	STD	310	1235	-	-	8.50	9.0		25	7500
	12.00 R 24	TL	-	178A5	STD	310	1235	-	-	8.50	9.0		25	7500
	14.00 R 24	TL	-	193A5	STD	388	1415	-	-	10.00 W	10.0, 10.00 WA		25	11500
	14.00 R 24	TL	-	193A5	IND	388	1415	-	-	10.00 W	10.0, 10.00 WA		25	11500
Ø 25"	16.00 R 25	TL	-	200A5	STD	440	1530	-	-	11.25/2.0	13.00/2.0		km/h / bar	10
													25	14000

STD: Standard - IND: Industrial

Technologies



Special Antistatic Compound

Performance



Stability



Durability



FORKLIFT

Bias

FL 252



FL 252 is a tire suitable for hay harvesting applications with rotor rakes/tedders as well as for logistic operations using forklifts. This tire provides excellent durability while the specific tread pattern ensures maximum stability during lifting operations.

Ø	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
8"	5.00 - 8	TT	8	-	STD	138	480	-	-	3.00 D	3.25 I		km/h / bar	8.30
													25 LOAD WHEEL	1235
													25 STEER WHEEL	950
													10 OTHER VEHICLES	1235
													25 OTHER VEHICLES	950
	STATIC SIDE LOADER	1435												
	5.00 - 8	TT	10	-	STD	138	480	-	-	3.00 D	3.25 I		km/h / bar	10.00
													25 LOAD WHEEL	1415
													25 STEER WHEEL	1090
													10 OTHER VEHICLES	1415
25 OTHER VEHICLES													1090	
STATIC SIDE LOADER	1645													
9"	6.00 - 9	TT	10	-	STD	170	550	-	-	4.00 E	-		km/h / bar	8.50
													25 LOAD WHEEL	1715
													25 STEER WHEEL	1320
													10 OTHER VEHICLES	1715
													25 OTHER VEHICLES	1320
													STATIC SIDE LOADER	1995
10"	6.50 - 10	TT	10	-	STD	185	605	-	-	5.00 F	5.50 F		km/h / bar	7.80
													25 LOAD WHEEL	1950
													25 STEER WHEEL	1500
													10 OTHER VEHICLES	1950
													25 OTHER VEHICLES	1500
													STATIC SIDE LOADER	2265
12"	7.00 - 12	TT	14	-	STD	190	688	-	-	5.00 S	-		km/h / bar	9.00
													25 LOAD WHEEL	2755
													25 STEER WHEEL	2120
													10 OTHER VEHICLES	2755
													25 OTHER VEHICLES	2120
													STATIC SIDE LOADER	3200
15"	8.15 - 15 (28 X 9 - 15)	TT	14	-	STD	220	720	-	-	7.00	7 BD		km/h / bar	10.00
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
													10 OTHER VEHICLES	3900
													25 OTHER VEHICLES	3000
	STATIC SIDE LOADER	4530												
	8.25 - 15	TT	14	-	STD	240	855	-	-	6.50	7.0		km/h / bar	8.00
													25 LOAD WHEEL	4225
													25 STEER WHEEL	3250
													10 OTHER VEHICLES	4225
													25 OTHER VEHICLES	3250
													STATIC SIDE LOADER	4910

Performance



Stability



Durability



Cut and Chip Resistance

STD: Standard



FORKLIFT

Bias

MP 590



MP 590 is an agro-industrial tire suitable for loading operations with telehandlers and forklifts. This tire provides good traction and excellent stability as well as increased durability.

Ø 22.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
18 - 22.5 (445/65 - 22.5)	TL	16	-	-	STD	480	1190	530	3534	14.0	-	5.50	
												40 DW	4875
												30 DW	5450
18 - 22.5 (445/65 - 22.5)	TL	20	-	-	STD	480	1190	530	3534	14.0	-	7.50	
												40 DW	5800
												30 DW	6500

STD: Standard

Performance



Stability



Traction



Durability



PL 801



PL 801 has been specially designed for hay harvesting applications with rotor rakes/ tedders and for logistics operations with forklifts. It features excellent stability as well as high cut and chip resistance. PL 801 ensures an extended tire life-cycle.

Ø 5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 5"	23 X 5 (23 X 5 (-13))	TT	6	-	STD	154	640	-	-	3.75 P	-		km/h / bar	5.30
													25 LOAD WHEEL	1495
													25 STEER WHEEL	1150
													10 OTHER VEHICLES	1495
													25 OTHER VEHICLES	1150
STATIC SIDE LOADER	1735													
Ø 8"	18 X 7 - 8 (180/70 - 8)	TT	14	-	STD	173	470	-	-	4.33 R	5.00 F		km/h / bar	9.00
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
													10 OTHER VEHICLES	1885
													25 OTHER VEHICLES	1450
	STATIC SIDE LOADER	2190												
	18 X 7 - 8 (180/70 - 8)	TT	16	-	STD	173	470	-	-	4.33 R	5.00 F		km/h / bar	10.00
													25 LOAD WHEEL	2145
													25 STEER WHEEL	1650
													10 OTHER VEHICLES	2145
													25 OTHER VEHICLES	1650
	STATIC SIDE LOADER	2490												
	5.00 - 8	TT	8	-	STD	135	468	-	-	3.00 D	3.25 I		km/h / bar	8.30
													25 LOAD WHEEL	1235
													25 STEER WHEEL	950
													10 OTHER VEHICLES	1235
													25 OTHER VEHICLES	950
STATIC SIDE LOADER	1435													
5.00 - 8	TT	10	-	STD	135	468	-	-	3.00 D	3.25 I		km/h / bar	10.00	
												25 LOAD WHEEL	1415	
												25 STEER WHEEL	1090	
												10 OTHER VEHICLES	1415	
												25 OTHER VEHICLES	1090	
STATIC SIDE LOADER	1645													

STD: Standard

Performance



Stability



Durability



Cut and Chip Resistance



PL 801

Ø 9"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
21 X 8 - 9 (200/75 - 9)	TT	14	-	STD	200	535	-	-	6.00 E	7.00 E		km/h / bar	9.00	
												25 LOAD WHEEL	2535	
												25 STEER WHEEL	1950	
												10 OTHER VEHICLES	2535	
												25 OTHER VEHICLES	1950	
STATIC SIDE LOADER	2945													
21 X 8 - 9 (200/75 - 9)	TT	16	-	STD	200	535	-	-	6.00 E	7.00 E		km/h / bar	10.00	
												25 LOAD WHEEL	2755	
												25 STEER WHEEL	2120	
												10 OTHER VEHICLES	2755	
												25 OTHER VEHICLES	2120	
STATIC SIDE LOADER	3200													
6.00 - 9	TT	10	-	STD	157	543	-	-	4.00 E	-		km/h / bar	8.50	
												25 LOAD WHEEL	1715	
												25 STEER WHEEL	1320	
												10 OTHER VEHICLES	1715	
												25 OTHER VEHICLES	1320	
STATIC SIDE LOADER	1995													
6.00 - 9	TT	12	-	STD	157	543	-	-	4.00 E	-		km/h / bar	10.00	
												25 LOAD WHEEL	1885	
												25 STEER WHEEL	1450	
												10 OTHER VEHICLES	1885	
												25 OTHER VEHICLES	1450	
STATIC SIDE LOADER	2190													
6.00 - 9	TT	10	-	SPL	157	543	-	-	4.00 E	-		km/h / bar	8.50	
												25 LOAD WHEEL	1715	
												25 STEER WHEEL	1320	
												10 OTHER VEHICLES	1715	
												25 OTHER VEHICLES	1320	
STATIC SIDE LOADER	1995													
Ø 10"	6.50 - 10	TT	10	-	STD	185	595	-	-	5.00 F	5.50 F		km/h / bar	7.80
													25 LOAD WHEEL	1950
													25 STEER WHEEL	1500
													10 OTHER VEHICLES	1950
													25 OTHER VEHICLES	1500
STATIC SIDE LOADER	2265													

Performance



Stability



Durability



Cut and Chip Resistance

STD: Standard - SPL: Special





PL 801

Ø 12"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
7.00 - 12	TT	12	-	STD	189	692	-	-	5.00 S	-		km/h / bar	8.50	
												25 LOAD WHEEL	2680	
												25 STEER WHEEL	2060	
												10 OTHER VEHICLES	2680	
												25 OTHER VEHICLES	2060	
STATIC SIDE LOADER	3110													
7.00 - 12	TT	14	-	STD	189	692	-	-	5.00 S	-		km/h / bar	9.00	
												25 LOAD WHEEL	2755	
												25 STEER WHEEL	2120	
												10 OTHER VEHICLES	2755	
												25 OTHER VEHICLES	2120	
STATIC SIDE LOADER	3200													
Ø 15"	250 - 15 (250/70 - 15)	TT	20	-	STD	235	745	-	-	7.50 BD	7.0; 7.5		km/h / bar	10.00
													25 LOAD WHEEL	5040
													25 STEER WHEEL	3875
													10 OTHER VEHICLES	5040
													25 OTHER VEHICLES	3875
	STATIC SIDE LOADER	5850												
	250 - 15 (250/70 - 15)	TT	16	-	STD	235	745	-	-	7.50 BD	7.0; 7.5		km/h / bar	8.30
													25 LOAD WHEEL	4355
													25 STEER WHEEL	3350
													10 OTHER VEHICLES	4355
													25 OTHER VEHICLES	3350
	STATIC SIDE LOADER	5060												
	300 - 15 (315/70 - 15)	TT	18	-	STD	295	840	-	-	8.00 BD	8.0		km/h / bar	7.50
													25 LOAD WHEEL	5850
													25 STEER WHEEL	4500
10 OTHER VEHICLES													5850	
25 OTHER VEHICLES													4500	
STATIC SIDE LOADER	6795													
5.50 - 15	TT	8	-	STD	157	670	-	-	4.50 E DT	4.50 E SDC		km/h / bar	7.30	
												25 LOAD WHEEL	1950	
												25 STEER WHEEL	1445	
												10 OTHER VEHICLES	1950	
												25 OTHER VEHICLES	1445	
STATIC SIDE LOADER	2180													
7.00 - 15 (29 X 8 - 15)	TT	12	-	STD	200	750	-	-	5.5	4.33 R; 5.0		km/h / bar	8.30	
												25 LOAD WHEEL	3070	
												25 STEER WHEEL	2360	
												10 OTHER VEHICLES	3070	
												25 OTHER VEHICLES	2360	
STATIC SIDE LOADER	3565													

STD: Standard

Performance



Stability



Durability




Cut and Chip Resistance





PL 801

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)		
										Rec.	Alt.		km/h / bar	Load capacity (kg/tire)	
														8.60	9.00
7.00 - 15 (30 X 8 - 15)	TT	12	-	STD	206	775	-	-	6.0	5.50 BD; 5.5		km/h / bar	8.60	9.00	
												25 LOAD WHEEL	2835	-	
												25 STEER WHEEL	2395	-	
												10 OTHER VEHICLES	2395	-	
												25 OTHER VEHICLES	1760	-	
												STATIC SIDE LOADER	-	3865	
7.00 - 15 (30 X 8 - 15)	TT	14	-	STD	206	775	-	-	6.0	5.50 BD; 5.5		km/h / bar	10.00	10.30	
												25 LOAD WHEEL	3095	-	
												25 STEER WHEEL	2615	-	
												10 OTHER VEHICLES	2615	-	
												25 OTHER VEHICLES	1920	-	
												STATIC SIDE LOADER	-	4225	
7.50 - 15	TT	12	-	STD	220	785	-	-	6.0	6.00 S; 6.5		km/h / bar	8.00	-	
												25 LOAD WHEEL	3445	-	
												25 STEER WHEEL	2650	-	
												10 OTHER VEHICLES	3445	-	
												25 OTHER VEHICLES	2650	-	
												STATIC SIDE LOADER	-	4000	
7.50 - 15 (7.50 - 15 (32" OD))	TT	14	-	STD	220	814	-	-	6.0	6.00 S; 6.5		km/h / bar	9.20	9.70	
												25 LOAD WHEEL	3430	-	
												25 STEER WHEEL	2900	-	
												10 OTHER VEHICLES	2900	-	
												25 OTHER VEHICLES	2130	-	
												STATIC SIDE LOADER	-	4685	
7.50 - 15	TT	14	-	STD	220	785	-	-	6.0	6.00 S; 6.5		km/h / bar	9.30	-	
												25 LOAD WHEEL	3640	-	
												25 STEER WHEEL	2800	-	
												10 OTHER VEHICLES	3640	-	
												25 OTHER VEHICLES	2800	-	
												STATIC SIDE LOADER	-	4230	
8.15 - 15 (28 X 9 - 15)	TT	12	-	STD	215	720	-	-	7.0	7.00 BD		km/h / bar	8.30	-	
												25 LOAD WHEEL	3445	-	
												25 STEER WHEEL	2650	-	
												10 OTHER VEHICLES	3445	-	
												25 OTHER VEHICLES	2650	-	
												STATIC SIDE LOADER	-	4000	
8.15 - 15 (28 X 9 - 15)	TT	14	-	STD	215	720	-	-	7.0	7.00 BD		km/h / bar	10.00	-	
												25 LOAD WHEEL	3900	-	
												25 STEER WHEEL	3000	-	
												10 OTHER VEHICLES	3900	-	
												25 OTHER VEHICLES	3000	-	
												STATIC SIDE LOADER	-	4530	

STD: Standard

Performance



Stability




Durability



Cut and Chip Resistance



Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)
										Rec.	Alt.	
												
8.25 - 15	TT	14	-	STD	236	854	-	-	6.5	6.0; 7.0	km/h / bar	8.00
											25 LOAD WHEEL	4225
											25 STEER WHEEL	3250
											10 OTHER VEHICLES	4225
											25 OTHER VEHICLES	3250
STATIC SIDE LOADER	4910											
8.25 - 15	TT	12	-	STD	236	854	-	-	6.5	6.0; 7.0	km/h / bar	7.00
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
											10 OTHER VEHICLES	3900
											25 OTHER VEHICLES	3000
STATIC SIDE LOADER	4530											

Performance



Stability



Durability



Cut and Chip Resistance

STD: Standard





FORKLIFT

Bias

POWER TRAX HD



POWER TRAX HD is a premium bias-ply tire that is specially designed for forklift equipment in industrial applications. The deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut, chip and tear resistance suitable for rough and hard concrete surface. The specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.

Ø 8"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar		
Ø 8"	18 X 7 - 8 (180/70 - 8)	TT	16	-	STD	173	470	-	-	4.33 R	5.00 F	km/h / bar	10.00	
												25 LOAD WHEEL	2145	
												25 STEER WHEEL	1650	
												10 OTHER VEHICLES	2145	
												25 OTHER VEHICLES	1650	
STATIC SIDE LOADER	2490													
Ø 8"	5.00 - 8	TT	10	-	STD	145	480	-	-	3.00 D	3.25 I	km/h / bar	10.00	
												25 LOAD WHEEL	1415	
												25 STEER WHEEL	1090	
												10 OTHER VEHICLES	1415	
												25 OTHER VEHICLES	1090	
STATIC SIDE LOADER	1645													
Ø 9"	6.00 - 9	TT	10	-	STD	166	543	-	-	4.00 E	-	km/h / bar	8.50	
												25 LOAD WHEEL	1715	
												25 STEER WHEEL	1320	
												10 OTHER VEHICLES	1715	
												25 OTHER VEHICLES	1320	
STATIC SIDE LOADER	1995													
Ø 10"	23 X 9 - 10 (225/75 - 10)	TT	18	-	STD	235	590	-	-	6.50 F	-	km/h / bar	9.00	
												25 LOAD WHEEL	3160	
												25 STEER WHEEL	2430	
												10 OTHER VEHICLES	3160	
												25 OTHER VEHICLES	2430	
	STATIC SIDE LOADER	3670												
	Ø 10"	23 X 9 - 10 (225/75 - 10)	TT	20	-	STD	235	590	-	-	6.50 F	-	km/h / bar	10.00
													25 LOAD WHEEL	3445
													25 STEER WHEEL	2650
													10 OTHER VEHICLES	3445
													25 OTHER VEHICLES	2650
	STATIC SIDE LOADER	4000												
	Ø 10"	6.50 - 10	TT	10	-	STD	193	595	278	1774	5.00 F	5.50 F	km/h / bar	7.80
													25 LOAD WHEEL	1950
													25 STEER WHEEL	1500
10 OTHER VEHICLES													1950	
25 OTHER VEHICLES													1500	
STATIC SIDE LOADER	2265													

Technologies



Deep Tread

Performance



Durability



High Puncture Resistance



Cut and Chip Resistance

STD: Standard



POWER TRAX HD

Ø 10"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	9.00
													25 LOAD WHEEL	2145
6.50 - 10	TT	12	-	STD	193	595	278	1774	5.00 F	5.50 F		25 STEER WHEEL	1650	
												10 OTHER VEHICLES	2145	
												25 OTHER VEHICLES	1650	
												STATIC SIDE LOADER	2490	
												km/h / bar	10.00	
6.50 - 10	TT	14	-	STD	193	595	278	1774	5.00 F	5.50 F		25 LOAD WHEEL	2340	
												25 STEER WHEEL	1800	
												10 OTHER VEHICLES	2340	
												25 OTHER VEHICLES	1800	
												STATIC SIDE LOADER	2720	
Ø 12"	27 X 10 - 12 (250/75 - 12)	TT	16	-	STD	255	690	-	-	8.00 G	-	km/h / bar	8.00	
												25 LOAD WHEEL	3900	
												25 STEER WHEEL	3000	
												10 OTHER VEHICLES	3900	
												25 OTHER VEHICLES	3000	
	STATIC SIDE LOADER	4530												
	27 X 10 - 12 (250/75 - 12)	TT	16	142 A8	IMP	255	690	-	-	8.00 G	-		km/h / bar	8.00
40													2650	
27 X 10 - 12 (250/75 - 12)	TT	20	-	STD	255	690	-	-	8.00 G	-		km/h / bar	10.00	
												25 LOAD WHEEL	4615	
												25 STEER WHEEL	3550	
												10 OTHER VEHICLES	4615	
												25 OTHER VEHICLES	3550	
STATIC SIDE LOADER	5360													
27 X 10 - 12 (250/75 - 12)	TT	20	148 A8	IMP	255	690	-	-	8.00 G	-		km/h / bar	10.00	
												40	3150	
7.00 - 12	TT	14	-	STD	205	675	-	-	5.00 S	-		km/h / bar	9.00	
												25 LOAD WHEEL	2755	
												25 STEER WHEEL	2120	
												10 OTHER VEHICLES	2755	
												25 OTHER VEHICLES	2120	
STATIC SIDE LOADER	3200													
7.00 - 12	TT	16	-	STD	205	675	-	-	5.00 S	-		km/h / bar	10.00	
												25 LOAD WHEEL	2910	
												25 STEER WHEEL	2240	
												10 OTHER VEHICLES	2910	
												25 OTHER VEHICLES	2240	
STATIC SIDE LOADER	3380													

STD: Standard - IMP: Implement

Technologies



Deep Tread

Performance



Durability



High Puncture Resistance



Cut and Chip Resistance





POWER TRAX HD

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
10.00L - 15 (36 X 11 - 15)	TT	16	-	STD	285	918	-	-	7.50 BD	7.5		km/h / bar	9.00	
												25 LOAD WHEEL	5525	
												25 STEER WHEEL	4250	
												10 OTHER VEHICLES	5525	
												25 OTHER VEHICLES	4250	
STATIC SIDE LOADER	6420													
10.00L - 15 (36 X 11 - 15)	TT	24	-	STD	285	918	-	-	7.50 BD	7.5		km/h / bar	10.00	
												25 LOAD WHEEL	6240	
												25 STEER WHEEL	4800	
												10 OTHER VEHICLES	6240	
												25 OTHER VEHICLES	4800	
STATIC SIDE LOADER	7250													
250 - 15 (250/70 - 15)	TT	16	-	STD	240	745	-	-	7.50	7.0		km/h / bar	8.30	
												25 LOAD WHEEL	4355	
												25 STEER WHEEL	3350	
												10 OTHER VEHICLES	4355	
												25 OTHER VEHICLES	3350	
STATIC SIDE LOADER	5060													
250 - 15 (250/70 - 15)	TT	18	-	STD	240	745	-	-	7.50	7.0		km/h / bar	9.50	
												25 LOAD WHEEL	4745	
												25 STEER WHEEL	3650	
												10 OTHER VEHICLES	4745	
												25 OTHER VEHICLES	3650	
STATIC SIDE LOADER	5510													
250 - 15 (250/70 - 15)	TT	20	-	STD	240	745	-	-	7.50	7.0		km/h / bar	10.00	
												25 LOAD WHEEL	5040	
												25 STEER WHEEL	3875	
												10 OTHER VEHICLES	5040	
												25 OTHER VEHICLES	3875	
STATIC SIDE LOADER	5850													
300 - 15 (315/70 - 15)	TT	20	-	STD	300	845	-	-	8.00	-		km/h / bar	9.00	
												25 LOAD WHEEL	6500	
												25 STEER WHEEL	5000	
												10 OTHER VEHICLES	6500	
												25 OTHER VEHICLES	5000	
STATIC SIDE LOADER	7550													
28 X 12.5 - 15	TT	24	-	STD	304	705	-	-	9.75 BD	-		km/h / bar	10.00	
												25 LOAD WHEEL	4745	
												25 STEER WHEEL	3650	
												10 OTHER VEHICLES	4745	
												25 OTHER VEHICLES	3650	
STATIC SIDE LOADER	5510													
28 X 12.5 - 15	TT	24	149A8	IMP	304	705	-	-	9.75 BD	-		km/h / bar	10.00	
												40	3250	

STD: Standard - IMP: Implement

Technologies



Deep Tread

Performance



Durability



High Puncture Resistance



Cut and Chip Resistance





POWER TRAX HD

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 15"	8.15 - 15 (28 X 9 - 15)	TT	14	-	STD	227	710	-	-	7.00	7 BD		km/h / bar	10.00
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
													10 OTHER VEHICLES	3900
													25 OTHER VEHICLES	3000
	STATIC SIDE LOADER	4530												
	8.25 - 15	TT	14	-	STD	248	845	-	-	6.50	7.0		km/h / bar	8.00
													25 LOAD WHEEL	4225
													25 STEER WHEEL	3250
													10 OTHER VEHICLES	4225
													25 OTHER VEHICLES	3250
	STATIC SIDE LOADER	4910												
	8.25 - 15	TT	16	-	STD	248	845	-	-	6.50	7.0		km/h / bar	9.30
													25 LOAD WHEEL	4615
													25 STEER WHEEL	3550
10 OTHER VEHICLES													4615	
25 OTHER VEHICLES													3550	
STATIC SIDE LOADER	5360													
Ø 20"	9.00 - 20	TT	16	-	STD	270	1050	-	-	7.0	7.5		km/h / bar	10.00
													25 LOAD WHEEL	6175
													25 STEER WHEEL	4750
													10 OTHER VEHICLES	6175
													25 OTHER VEHICLES	4750
	STATIC SIDE LOADER	7150												
	10.00 - 20	TT	16	-	STD	285	1080	-	-	7.5	8.0		km/h / bar	9.00
													25 LOAD WHEEL	6500
													25 STEER WHEEL	5000
													10 OTHER VEHICLES	6500
													25 OTHER VEHICLES	5000
	STATIC SIDE LOADER	7550												
	10.00 - 20	TT	18	-	STD	285	1080	-	-	7.5	8.0		km/h / bar	10.00
													25 LOAD WHEEL	6890
													25 STEER WHEEL	5300
													10 OTHER VEHICLES	6890
													25 OTHER VEHICLES	5300
	STATIC SIDE LOADER	8005												
	10.00 - 20	TT	16	160A8	IMP	285	1080	-	-	7.5	8.0		km/h / bar	9.00
													40	4500

STD: Standard - IMP: Implement

Technologies



Deep Tread

Performance



Durability



High Puncture Resistance



Cut and Chip Resistance

POWER TRAX HD SMOOTH



POWER TRAX HD SMOOTH is a bias-ply tire specially designed for port and underground mining operations. The special sidewall protection along with a solid tread prevents cut and puncture damages that are common in such demanding environments. When you need to move heavy-duty loads, POWER TRAX HD SMOOTH is your ideal partner.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
12.00 - 20	TT	20	-	STD	320	1150	-	-	8.50	9.0	km/h / bar	10.00	
											25 LOAD WHEEL	9230	
											25 STEER WHEEL	7100	
											10 OTHER VEHICLES	9230	
											25 OTHER VEHICLES	7100	
STATIC SIDE LOADER	10720												
12.00 - 20	TT	28	-	STD	320	1150	-	-	8.50	9.0	km/h / bar	10.00	
											25 LOAD WHEEL	9490	
											25 STEER WHEEL	7300	
											10 OTHER VEHICLES	9490	
											25 OTHER VEHICLES	7300	
STATIC SIDE LOADER	11025												

STD: Standard

Technologies



Heavy Duty



Extra Deep Tread

Performance



Durability



Stability



Cut and Chip Resistance



SNOW GRIP



SNOW GRIP is specifically engineered for forklifts operating in low-temperature environments. The unique tread design features multiple gripping edges for superior grip on fresh or compact snow, resulting in excellent cornering and braking performance on icy and snowy surfaces. The dual bead construction along with the strong casing and reinforced sidewall provides higher load capacity, excellent stability and handling in lift mode in addition to a long tire life.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)
										Rec.	Alt.	
										km/h / bar		
7.50 - 16	TT	12	131A2	STD	210	810	-	-	6.0	-	5.0	
											10	1950

STD: Standard

Performance



SUPER TRAX HD



SUPER TRAX HD has been specifically engineered for forklifts in heavy-duty material handling operations, including port and mining applications. The extra deep tread is made of a unique wear-resistant tread compound ensuring a longer service life. SUPER TRAX HD features a strong casing and a reinforced sidewall resulting in both excellent stability and maneuvering in lift mode. The specially designed rim guard provides protection against flats and wheel damage in the rim flange area.

Ø 9"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
Ø 9"	6.00 - 9	TT	12	-	STD	168	548	256	1672	4.00 E	-	km/h / bar	10.00
												25 LOAD WHEEL	1885
												25 STEER WHEEL	1450
												10 OTHER VEHICLES	1885
												25 OTHER VEHICLES	1450
STATIC SIDE LOADER	2190												
Ø 10"	6.50 - 10	TT	12	-	STD	195	600	282	1838	5.00 F	5.50 F	km/h / bar	9.00
												25 LOAD WHEEL	2145
												25 STEER WHEEL	1650
												10 OTHER VEHICLES	2145
												25 OTHER VEHICLES	1650
STATIC SIDE LOADER	2490												
Ø 12"	7.00 - 12	TT	14	-	STD	200	692	323	2088	5.00 S	-	km/h / bar	9.00
												25 LOAD WHEEL	2755
												25 STEER WHEEL	2120
												10 OTHER VEHICLES	2755
												25 OTHER VEHICLES	2120
STATIC SIDE LOADER	3200												
Ø 15"	8.15 - 15 (28 X 9 - 15)	TT	14	-	STD	220	715	332	2169	7.00	7 BD	km/h / bar	10.00
												25 LOAD WHEEL	3900
												25 STEER WHEEL	3000
												10 OTHER VEHICLES	3900
												25 OTHER VEHICLES	3000
	STATIC SIDE LOADER	4530											
	8.25 - 15	TT	16	-	STD	245	845	395	2434	6.50	7.0	km/h / bar	9.30
												25 LOAD WHEEL	4615
												25 STEER WHEEL	3550
												10 OTHER VEHICLES	4615
25 OTHER VEHICLES												3550	
STATIC SIDE LOADER	5360												

STD: Standard

Technologies



Extra Deep Tread

Performance



Stability



Cut Resistance



Traction



Handling & Comfort



Durability



FORKLIFT

◆ Solid

MAGLIFT



MAGLIFT has been particularly designed for forklift in industrial and logistic operations. This solid tire features high load capacity and outstanding comfort. MAGLIFT shows excellent cut and chip resistance resulting in a long tire life. Its reinforced structure eliminates slippage risks whilst the special bead shape simplifies mounting operations on the rim.

Ø 8"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	-
												25 LOAD WHEEL	25 STEER WHEEL
15 X 4.5 - 8 (125/75 - 8)	-	-	-	-	STD	119	378	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	1040
												25 STEER WHEEL	800
15 X 4.5 - 8 (125/75 - 8)	-	-	-	-	LIP	119	378	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	1040
												25 STEER WHEEL	800
15 X 4.5 - 8 (125/75 - 8)	-	-	-	-	LIP NM	119	378	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	1040
												25 STEER WHEEL	800
15 X 4.5 - 8 (125/75 - 8)	-	-	-	-	STD NM	119	378	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	1040
												25 STEER WHEEL	800
16 X 6 - 8 (150/75 - 8)	-	-	-	-	STD	139	421	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	1495
												25 STEER WHEEL	1150
16 X 6 - 8 (150/75 - 8)	-	-	-	-	LIP	139	421	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	1495
												25 STEER WHEEL	1150
16 X 6 - 8 (150/75 - 8)	-	-	-	-	LIP NM	139	421	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	1495
												25 STEER WHEEL	1150
16 X 6 - 8 (150/75 - 8)	-	-	-	-	STD NM	139	421	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	1495
												25 STEER WHEEL	1150
18 X 7 - 8 (180/70 - 8)	-	-	-	-	STD	153	457	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	2145
												25 STEER WHEEL	1650
18 X 7 - 8 (180/70 - 8)	-	-	-	-	LIP	153	457	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	2145
												25 STEER WHEEL	1650
18 X 7 - 8 (180/70 - 8)	-	-	-	-	LIP NM	153	457	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	2145
												25 STEER WHEEL	1650

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort





Ø 8"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
													25 LOAD WHEEL	25 STEER WHEEL
18 X 7 - 8 (180/70 - 8)	-	-	-	-	STD NM	153	457	-	-	4.33 R - 8	-		km/h / bar	-
													25 LOAD WHEEL	2145
													25 STEER WHEEL	1650
4.00 - 8	-	-	-	-	STD	109	406	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	950
													25 STEER WHEEL	730
4.00 - 8	-	-	-	-	LIP	109	406	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	950
													25 STEER WHEEL	730
4.00 - 8	-	-	-	-	LIP NM	109	406	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	950
													25 STEER WHEEL	730
4.00 - 8	-	-	-	-	STD NM	109	406	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	950
													25 STEER WHEEL	730
5.00 - 8	-	-	-	-	STD	120	462	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	1415
													25 STEER WHEEL	1090
5.00 - 8	-	-	-	-	LIP	120	462	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	1415
													25 STEER WHEEL	1090
5.00 - 8	-	-	-	-	LIP NM	120	462	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	1415
													25 STEER WHEEL	1090
5.00 - 8	-	-	-	-	STD NM	120	462	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	1415
													25 STEER WHEEL	1090
Ø 9"	140/55 - 9	-	-	-	STD	132	377	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1170
													25 STEER WHEEL	900
140/55 - 9	-	-	-	-	LIP	132	377	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1170
													25 STEER WHEEL	900
140/55 - 9	-	-	-	-	LIP NM	132	377	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1170
													25 STEER WHEEL	900
140/55 - 9	-	-	-	-	STD NM	132	377	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1170
													25 STEER WHEEL	900

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort





Ø 9"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
													25 LOAD WHEEL	25 STEER WHEEL
21 X 8 - 9 (200/75 - 9)	-	-	-	-	STD	189	525	-	-	6.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	2755
													25 STEER WHEEL	2120
21 X 8 - 9 (200/75 - 9)	-	-	-	-	LIP	189	525	-	-	6.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	2755
													25 STEER WHEEL	2120
21 X 8 - 9 (200/75 - 9)	-	-	-	-	LIP NM	189	525	-	-	6.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	2755
													25 STEER WHEEL	2120
21 X 8 - 9 (200/75 - 9)	-	-	-	-	STD NM	189	525	-	-	6.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	2755
													25 STEER WHEEL	2120
6.00 - 9	-	-	-	-	STD	141	529	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
6.00 - 9	-	-	-	-	LIP	141	529	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
6.00 - 9	-	-	-	-	LIP NM	141	529	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
6.00 - 9	-	-	-	-	STD NM	141	529	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
Ø 10"	180/60-10	-	-	-	STD	153	460	-	-	5.00F-10	-		km/h / bar	-
													25 LOAD WHEEL	2410
													25 STEER WHEEL	1850
180/60-10	-	-	-	-	LIP	153	460	-	-	5.00F-10	-		km/h / bar	-
													25 LOAD WHEEL	2410
													25 STEER WHEEL	1850
200/50 - 10	-	-	-	-	STD	193	458	-	-	6.50 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2470
													25 STEER WHEEL	1900
200/50 - 10	-	-	-	-	LIP	193	458	-	-	6.50 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2470
													25 STEER WHEEL	1900
200/50 - 10	-	-	-	-	LIP NM	193	458	-	-	6.50 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2470
													25 STEER WHEEL	1900

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort





Ø 10"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	-
												25 LOAD WHEEL	25 STEER WHEEL
200/50 - 10	-	-	-	-	STD NM	193	458	-	-	6.50 F - 10	-	km/h / bar	-
												25 LOAD WHEEL	2470
												25 STEER WHEEL	1900
23 X 9 - 10 (225/75 - 10)	-	-	-	-	STD	213	585	-	-	6.50 F - 10	-	km/h / bar	-
												25 LOAD WHEEL	3445
												25 STEER WHEEL	2650
23 X 9 - 10 (225/75 - 10)	-	-	-	-	LIP	213	585	-	-	6.50 F - 10	-	km/h / bar	-
												25 LOAD WHEEL	3445
												25 STEER WHEEL	2650
23 X 9 - 10 (225/75 - 10)	-	-	-	-	LIP NM	213	585	-	-	6.50 F - 10	-	km/h / bar	-
												25 LOAD WHEEL	3445
												25 STEER WHEEL	2650
23 X 9 - 10 (225/75 - 10)	-	-	-	-	STD NM	213	585	-	-	6.50 F - 10	-	km/h / bar	-
												25 LOAD WHEEL	3445
												25 STEER WHEEL	2650
6.50 - 10	-	-	-	-	STD	154	575	-	-	5.00 F - 10	-	km/h / bar	-
												25 LOAD WHEEL	2340
												25 STEER WHEEL	1800
6.50 - 10	-	-	-	-	LIP	154	575	-	-	5.00 F - 10	-	km/h / bar	-
												25 LOAD WHEEL	2340
												25 STEER WHEEL	1800
6.50 - 10	-	-	-	-	LIP NM	154	575	-	-	5.00 F - 10	-	km/h / bar	-
												25 LOAD WHEEL	2340
												25 STEER WHEEL	1800
6.50 - 10	-	-	-	-	STD NM	154	575	-	-	5.00 F - 10	-	km/h / bar	-
												25 LOAD WHEEL	2340
												25 STEER WHEEL	1800
Ø 12"	23 X 10 - 12 (250/60 - 12)	-	-	-	STD	236	584	-	-	8.00 G - 12	-	km/h / bar	-
												25 LOAD WHEEL	3770
												25 STEER WHEEL	2900
23 X 10 - 12 (250/60 - 12)	-	-	-	-	LIP	236	584	-	-	8.00 G - 12	-	km/h / bar	-
												25 LOAD WHEEL	3770
												25 STEER WHEEL	2900
23 X 10 - 12 (250/60 - 12)	-	-	-	-	LIP NM	236	584	-	-	8.00 G - 12	-	km/h / bar	-
												25 LOAD WHEEL	3770
												25 STEER WHEEL	2900
23 X 10 - 12 (250/60 - 12)	-	-	-	-	STD NM	236	584	-	-	8.00 G - 12	-	km/h / bar	-
												25 LOAD WHEEL	3770
												25 STEER WHEEL	2900

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort





Ø 12"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	-
													25 LOAD WHEEL	25 STEER WHEEL
27 X 10 - 12 (250/75 - 12)	-	-	-	-	STD	240	677	-	-	8.00 G - 12	-	km/h / bar	-	
												25 LOAD WHEEL	3900	
												25 STEER WHEEL	3000	
27 X 10 - 12 (250/75 - 12)	-	-	-	-	LIP	240	677	-	-	8.00 G - 12	-	km/h / bar	-	
												25 LOAD WHEEL	3900	
												25 STEER WHEEL	3000	
27x10-12 (250/75 - 12)	-	-	-	-	LIP NM	240	677	-	-	8.00 G - 12	-	km/h / bar	-	
												25 LOAD WHEEL	3900	
												25 STEER WHEEL	3000	
27x10-12 (250/75 - 12)	-	-	-	-	STD NM	240	677	-	-	8.00 G - 12	-	km/h / bar	-	
												25 LOAD WHEEL	3900	
												25 STEER WHEEL	3000	
315/45-12	-	-	-	-	STD	282	578	-	-	10.00G-12	-	km/h / bar	-	
												25 LOAD WHEEL	4485	
												25 STEER WHEEL	3450	
315/45-12	-	-	-	-	LIP	282	578	-	-	10.00G-12	-	km/h / bar	-	
												25 LOAD WHEEL	4485	
												25 STEER WHEEL	3450	
7.00 - 12	-	-	-	-	STD	168	658	-	-	5.00 S - 12	-	km/h / bar	-	
												25 LOAD WHEEL	2920	
												25 STEER WHEEL	2240	
7.00 - 12	-	-	-	-	LIP	168	658	-	-	5.00 S - 12	-	km/h / bar	-	
												25 LOAD WHEEL	2920	
												25 STEER WHEEL	2240	
7.00 - 12	-	-	-	-	LIP NM	168	658	-	-	5.00 S - 12	-	km/h / bar	-	
												25 LOAD WHEEL	2920	
												25 STEER WHEEL	2240	
7.00 - 12	-	-	-	-	STD NM	168	658	-	-	5.00 S - 12	-	km/h / bar	-	
												25 LOAD WHEEL	2920	
												25 STEER WHEEL	2240	
Ø 15"	250 - 15 (250/70 - 15)	-	-	-	STD	216	718	-	-	7.0 - 15	-	km/h / bar	-	
												25 LOAD WHEEL	4745	
												25 STEER WHEEL	3650	
250 - 15 (250/70 - 15)	-	-	-	-	LIP	216	718	-	-	7.0 - 15	-	km/h / bar	-	
												25 LOAD WHEEL	4745	
												25 STEER WHEEL	3650	
250 - 15 (250/70 - 15)	-	-	-	-	LIP NM	216	718	-	-	7.0 - 15	-	km/h / bar	-	
												25 LOAD WHEEL	4745	
												25 STEER WHEEL	3650	

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort





Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
250 - 15 (250/70 - 15)	-	-	-	-	STD NM	216	718	-	-	7.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	4745
													25 STEER WHEEL	3650
28 X 12.5 - 15 (355/45 - 15)	-	-	-	-	STD	295	687	-	-	9.75 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5690
													25 STEER WHEEL	4375
28 X 12.5 - 15 (355/45 - 15)	-	-	-	-	LIP	295	687	-	-	9.75 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5690
													25 STEER WHEEL	4375
28 X 12.5 - 15 (355/45 - 15)	-	-	-	-	LIP NM	295	687	-	-	9.75 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5690
													25 STEER WHEEL	4375
28 X 12.5 - 15 (355/45 - 15)	-	-	-	-	STD NM	295	687	-	-	9.75 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5690
													25 STEER WHEEL	4375
300 - 15 (315/70 - 15)	-	-	-	-	STD	255	820	-	-	8.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5850
													25 STEER WHEEL	4500
300 - 15 (315/70 - 15)	-	-	-	-	LIP	255	820	-	-	8.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5850
													25 STEER WHEEL	4500
300 - 15 (315/70 - 15)	-	-	-	-	LIP NM	255	820	-	-	8.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5850
													25 STEER WHEEL	4500
300 - 15 (315/70 - 15)	-	-	-	-	STD NM	255	820	-	-	8.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5850
													25 STEER WHEEL	4500
32 X 12.5 - 15 (355/65 - 15)	-	-	-	-	STD	295	825	-	-	9.75 - 15	-		km/h / bar	-
													25 LOAD WHEEL	7800
													25 STEER WHEEL	6000
32 X 12.5 - 15 (355/65 - 15)	-	-	-	-	LIP	295	825	-	-	9.75 - 15	-		km/h / bar	-
													25 LOAD WHEEL	7800
													25 STEER WHEEL	6000
5.50 - 15	-	-	-	-	STD	145	665	-	-	4.50 E - 15	-		km/h / bar	-
													25 LOAD WHEEL	2145
													25 STEER WHEEL	1650
7.00 - 15	-	-	-	-	STD	180	730	-	-	5.5 - 15	-		km/h / bar	-
													25 LOAD WHEEL	3545
													25 STEER WHEEL	2725
7.00 - 15	-	-	-	-	LIP	180	730	-	-	5.5 - 15	-		km/h / bar	-
													25 LOAD WHEEL	3545
													25 STEER WHEEL	2725
7.00 - 15	-	-	-	-	LIP NM	180	730	-	-	5.5 - 15	-		km/h / bar	-
													25 LOAD WHEEL	3545
													25 STEER WHEEL	2725

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort





Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
7.00 - 15	-	-	-	-	STD NM	180	730	-	-	5.5 - 15	-	km/h / bar	-
												25 LOAD WHEEL	3545
												25 STEER WHEEL	2725
7.50 - 15	-	-	-	STD	193	756	-	-	5.5 - 15	-	km/h / bar	-	
											25 LOAD WHEEL	3900	
											25 STEER WHEEL	3000	
7.50 - 15	-	-	-	STD	193	756	-	-	6.0 - 15	-	km/h / bar	-	
											25 LOAD WHEEL	3900	
											25 STEER WHEEL	3000	
7.50 - 15	-	-	-	LIP	193	756	-	-	5.5 - 15	-	km/h / bar	-	
											25 LOAD WHEEL	3900	
											25 STEER WHEEL	3000	
7.50 - 15	-	-	-	LIP	193	756	-	-	6.0 - 15	-	km/h / bar	-	
											25 LOAD WHEEL	3900	
											25 STEER WHEEL	3000	
7.50 - 15	-	-	-	LIP NM	193	756	-	-	5.5 - 15	-	km/h / bar	-	
											25 LOAD WHEEL	3900	
											25 STEER WHEEL	3000	
7.50 - 15	-	-	-	LIP NM	193	756	-	-	6.0 - 15	-	km/h / bar	-	
											25 LOAD WHEEL	3900	
											25 STEER WHEEL	3000	
7.50 - 15	-	-	-	STD NM	193	756	-	-	5.5 - 15	-	km/h / bar	-	
											25 LOAD WHEEL	3900	
											25 STEER WHEEL	3000	
7.50 - 15	-	-	-	STD NM	193	756	-	-	6.0 - 15	-	km/h / bar	-	
											25 LOAD WHEEL	3900	
											25 STEER WHEEL	3000	
8.15-15/28x9-15 (225/75 - 15)	-	-	-	STD	218	691	-	-	7.0 - 15	-	km/h / bar	-	
											25 LOAD WHEEL	3445	
											25 STEER WHEEL	2650	
8.15-15/28x9-15 (225/75 - 15)	-	-	-	LIP	218	691	-	-	7.0 - 15	-	km/h / bar	-	
											25 LOAD WHEEL	3445	
											25 STEER WHEEL	2650	
8.15-15/28x9-15 (225/75 - 15)	-	-	-	LIP NM	218	691	-	-	7.0 - 15	-	km/h / bar	-	
											25 LOAD WHEEL	3445	
											25 STEER WHEEL	2650	
8.15-15/28x9-15 (225/75 - 15)	-	-	-	STD NM	218	691	-	-	7.0 - 15	-	km/h / bar	-	
											25 LOAD WHEEL	3445	
											25 STEER WHEEL	2650	
8.25 - 15	-	-	-	STD	207	818	-	-	6.5 - 15	-	km/h / bar	-	
											25 LOAD WHEEL	4750	
											25 STEER WHEEL	3650	

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking





FORKLIFT

MAGLIFT

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
										km/h / bar			
8.25 - 15	-	-	-	-	LIP	207	818	-	-	6.5 - 15	-	25 LOAD WHEEL	4750
												25 STEER WHEEL	3650
												-	
8.25 - 15	-	-	-	-	LIP NM	207	818	-	-	6.5 - 15	-	25 LOAD WHEEL	4750
												25 STEER WHEEL	3650
												-	
8.25 - 15	-	-	-	-	STD NM	207	818	-	-	6.5 - 15	-	25 LOAD WHEEL	4750
												25 STEER WHEEL	3650
												-	
Ø 20"	10.00 - 20	-	-	-	STD	255	1035	-	-	7.50 - 20	-	25 LOAD WHEEL	6000
												25 STEER WHEEL	5000
												-	
10.00 - 20	-	-	-	-	STD	255	1035	-	-	7.00 - 20	-	25 LOAD WHEEL	6000
												25 STEER WHEEL	5000
												-	
10.00 - 20	-	-	-	-	STD	255	1035	-	-	8.00 - 20	-	25 LOAD WHEEL	6000
												25 STEER WHEEL	5000
												-	
11.00 - 20	-	-	-	-	STD	259	1060	-	-	7.50 - 20	-	25 LOAD WHEEL	6540
												25 STEER WHEEL	5450
												-	
11.00 - 20	-	-	-	-	STD	259	1060	-	-	8.00 - 20	-	25 LOAD WHEEL	6540
												25 STEER WHEEL	5450
												-	
12.00 - 20	-	-	-	-	STD	285	1090	-	-	8.00 - 20	-	25 LOAD WHEEL	7560
												25 STEER WHEEL	6300
												-	
12.00 - 20	-	-	-	-	STD	285	1090	-	-	8.50 - 20	-	25 LOAD WHEEL	7560
												25 STEER WHEEL	6300
												-	
Ø 24"	14.00 - 24	-	-	-	STD	330	1320	-	-	10.00 - 24	-	25 LOAD WHEEL	11100
												25 STEER WHEEL	9250
												-	

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort





FORKLIFT

◆ Solid

MAGLIFT ECO



MAGLIFT ECO has been particularly designed for forklifts. The tire features a wide lug pattern providing maximum stability and optimized load distribution. Its reinforced structure eliminates slippage risks whilst the specifically designed rim guard ensures protection against wheel damage. MAGLIFT ECO shows excellent traction as well as low rolling resistance and low heat built up for improved efficiency.

Ø 8"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
15 X 4.5 - 8 (125/75 - 8)	-	-	-	-	STD	109	378	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	1040
												25 STEER WHEEL	800
15 X 4.5 - 8 (125/75 - 8)	-	-	-	LIP	109	378	-	-	3.00 D - 8	-	km/h / bar	-	
											25 LOAD WHEEL	1040	
											25 STEER WHEEL	800	
16 X 6 - 8 (150/75 - 8)	-	-	-	STD	140	407	-	-	4.33 R - 8	-	km/h / bar	-	
											25 LOAD WHEEL	1495	
											25 STEER WHEEL	1150	
16 X 6 - 8 (150/75 - 8)	-	-	-	LIP	140	407	-	-	4.33 R - 8	-	km/h / bar	-	
											25 LOAD WHEEL	1495	
											25 STEER WHEEL	1150	
18 X 7 - 8 (180/70 - 8)	-	-	-	STD	133	451	-	-	4.33 R - 8	-	km/h / bar	-	
											25 LOAD WHEEL	2145	
											25 STEER WHEEL	1650	
18 X 7 - 8 (180/70 - 8)	-	-	-	LIP	133	451	-	-	4.33 R - 8	-	km/h / bar	-	
											25 LOAD WHEEL	2145	
											25 STEER WHEEL	1650	
4.00 - 8	-	-	-	STD	100	404	-	-	3.00 D - 8	-	km/h / bar	-	
											25 LOAD WHEEL	950	
											25 STEER WHEEL	730	
4.00 - 8	-	-	-	LIP	100	404	-	-	3.00 D - 8	-	km/h / bar	-	
											25 LOAD WHEEL	950	
											25 STEER WHEEL	730	
5.00 - 8	-	-	-	STD	111	455	-	-	3.00 D - 8	-	km/h / bar	-	
											25 LOAD WHEEL	1415	
											25 STEER WHEEL	1090	
5.00 - 8	-	-	-	LIP	111	455	-	-	3.00 D - 8	-	km/h / bar	-	
											25 LOAD WHEEL	1415	
											25 STEER WHEEL	1090	

STD: Standard - LIP: LIP Version

Technologies



Extra Deep Tread

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort



Stability



FORKLIFT

MAGLIFT ECO

Ø 9"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
										km/h / bar			
21 X 8 - 9 (200/75 - 9)	-	-	-	-	STD	175	520	-	-	6.00 E - 9	-	25 LOAD WHEEL	2755
												25 STEER WHEEL	2120
												-	
21 X 8 - 9 (200/75 - 9)	-	-	-	-	LIP	175	520	-	-	6.00 E - 9	-	25 LOAD WHEEL	2755
												25 STEER WHEEL	2120
												-	
6.00 - 9	-	-	-	-	STD	130	522	-	-	4.00 E - 9	-	25 LOAD WHEEL	1885
												25 STEER WHEEL	1450
												-	
6.00 - 9	-	-	-	-	LIP	130	522	-	-	4.00 E - 9	-	25 LOAD WHEEL	1885
												25 STEER WHEEL	1450
												-	
Ø 10"	200 / 50 - 10	-	-	-	STD	180	452	-	-	6.50 F - 10	-	25 LOAD WHEEL	2470
												25 STEER WHEEL	1900
												-	
200 / 50 - 10	-	-	-	-	LIP	180	452	-	-	6.50 F - 10	-	25 LOAD WHEEL	2470
												25 STEER WHEEL	1900
												-	
23 X 9 - 10 (225/75 - 10)	-	-	-	-	STD	184	578	-	-	6.50 F - 10	-	25 LOAD WHEEL	3445
												25 STEER WHEEL	2650
												-	
23 X 9 - 10 (225/75 - 10)	-	-	-	-	LIP	184	578	-	-	6.50 F - 10	-	25 LOAD WHEEL	3445
												25 STEER WHEEL	2650
												-	
6.50 - 10	-	-	-	-	STD	153	571	-	-	5.00 F - 10	-	25 LOAD WHEEL	2340
												25 STEER WHEEL	1800
												-	
6.50 - 10	-	-	-	-	LIP	153	571	-	-	5.00 F - 10	-	25 LOAD WHEEL	2340
												25 STEER WHEEL	1800
												-	
Ø 12"	27 X 10 - 12 (250/75 - 12)	-	-	-	STD	225	670	-	-	8.00 G - 12	-	25 LOAD WHEEL	3900
												25 STEER WHEEL	3000
												-	
27 X 10 - 12 (250/75 - 12)	-	-	-	-	LIP	225	670	-	-	8.00 G - 12	-	25 LOAD WHEEL	3900
												25 STEER WHEEL	3000
												-	
7.00 - 12	-	-	-	-	STD	164	645	-	-	5.00 S - 12	-	25 LOAD WHEEL	2920
												25 STEER WHEEL	2240
												-	

STD: Standard - LIP: LIP Version

Technologies



Extra Deep Tread

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort



Stability





FORKLIFT

MAGLIFT ECO

Ø 12"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	-
												25 LOAD WHEEL	25 STEER WHEEL
Ø 12"	7.00 - 12	-	-	-	LIP	164	645	-	-	5.00 S - 12	-	km/h / bar	-
												25 LOAD WHEEL	2920
												25 STEER WHEEL	2240
Ø 15"	250 - 15 (250/70 - 15)	-	-	-	STD	209	714	-	-	7.0 - 15	-	km/h / bar	-
												25 LOAD WHEEL	4745
												25 STEER WHEEL	3650
Ø 15"	250 - 15 (250/70 - 15)	-	-	-	LIP	209	714	-	-	7.0 - 15	-	km/h / bar	-
												25 LOAD WHEEL	4745
												25 STEER WHEEL	3650
Ø 15"	300-15 (315/70 - 15)	-	-	-	STD	242	820	-	-	8.0-15	-	km/h / bar	-
												25 LOAD WHEEL	5850
												25 STEER WHEEL	4500
Ø 15"	300-15 (315/70 - 15)	-	-	-	LIP	242	820	-	-	8.0-15	-	km/h / bar	-
												25 LOAD WHEEL	5850
												25 STEER WHEEL	4500
Ø 15"	8.15-15/28x9-15 (225/75 - 15)	-	-	-	STD	204	691	-	-	7.0 - 15	-	km/h / bar	-
												25 LOAD WHEEL	3445
												25 STEER WHEEL	2650
Ø 15"	8.15-15/28x9-15 (225/75 - 15)	-	-	-	LIP	204	691	-	-	7.0 - 15	-	km/h / bar	-
												25 LOAD WHEEL	3445
												25 STEER WHEEL	2650
Ø 15"	8.25 - 15	-	-	-	STD	210	808	-	-	6.5 - 15	-	km/h / bar	-
												25 LOAD WHEEL	4750
												25 STEER WHEEL	3650
Ø 15"	8.25 - 15	-	-	-	LIP	210	808	-	-	6.5 - 15	-	km/h / bar	-
												25 LOAD WHEEL	4750
												25 STEER WHEEL	3650

STD: Standard - LIP: LIP Version

Technologies



Extra Deep Tread

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort



Stability





FORKLIFT

◆ Solid

MAGLIFT PREMIUM



MAGLIFT PREMIUM is a solid tire specially designed for heavy forklift operations in port, mining or scrap yard applications. The extra deep tread (25% more compared to the standard version) with its aggressive and robust pattern provides outstanding front and lateral traction in addition to excellent steering control. The unique tread compound ensures high cut and chip resistance resulting in an extended tire life-cycle. Additional features are low rolling resistance and a smooth run.

Ø 9"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 9"	6.00 - 9	-	-	-	STD	137	536	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
Ø 9"	6.00 - 9	-	-	-	LIP	137	536	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
Ø 9"	6.00 - 9	-	-	-	LIP NM	137	536	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
Ø 9"	6.00 - 9	-	-	-	STD NM	137	536	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
Ø 10"	6.50 - 10	-	-	-	STD	150	582	-	-	5.00 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2340
													25 STEER WHEEL	1800
Ø 10"	6.50 - 10	-	-	-	LIP	150	582	-	-	5.00 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2340
													25 STEER WHEEL	1800
Ø 12"	7.00 - 12	-	-	-	STD	163	664	-	-	5.00 S - 12	-		km/h / bar	-
													25 LOAD WHEEL	2920
													25 STEER WHEEL	2240
Ø 12"	7.00 - 12	-	-	-	LIP	163	664	-	-	5.00 S - 12	-		km/h / bar	-
													25 LOAD WHEEL	2920
													25 STEER WHEEL	2240

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking

Technologies



Extra Deep Tread

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort



FORKLIFT

◆ Solid

MAGLIFT ECO RIB



MAGLIFT ECO RIB is a solid tire specially designed for GSE trailers (ground support equipment). Its reinforced structure eliminates slippage risks whilst the specifically designed rim guard ensures protection against wheel damage. MAGLIFT ECO RIB shows excellent steering control, high stability, low vibration and self-ment for trailers. Additional features are low rolling resistance and low heat built up for improved efficiency.

Ø 8"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
4.00 - 8	-	-	-	-	STD	104	406	-	-	3.00 D - 8	-		km/h / bar	-
													5 OTHER VEHICLES	950
													10 OTHER VEHICLES	860
													25 OTHER VEHICLES	730
4.00 - 8	-	-	-	STD	124	408	-	-	3.75 I - 8	-		km/h / bar	-	
												5 OTHER VEHICLES	1010	
												10 OTHER VEHICLES	915	
												25 OTHER VEHICLES	775	

STD: Standard

Performance



Steering Control



Low Rolling Resistance



Stability





FORKLIFT

◆ Solid

MAGLIFT RIM GUARD



MAGLIFT (RIM GUARD) is specially engineered and designed for heavy duty forklifts used in industrial and logistic facilities. Its aggressive and robust tread pattern provide superior forward and lateral traction and excellent steering control. In addition, the wide center rib provides a low rolling resistance. The solid construction of MAGLIFT (RIM GUARD) features a high load capacity and an outstanding comfort, while its specially designed rim guard ensures protection against wheel damage. In addition, this tire shows excellent cut and chip resistance resulting in a longer tire life.

MAGLIFT (RIM GUARD) reinforced structure eliminates slippage risk whilst the special bead shape simplifies mounting operations on the rim.

Ø 10"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
Ø 10"	6.50 - 10	-	-	-	STD	154	575	-	-	5.00 F - 10	-	km/h / bar	-
												25 LOAD WHEEL	2340
												25 STEER WHEEL	1800
Ø 10"	6.50 - 10	-	-	-	STD	154	575	-	-	5.50 F - 10	-	km/h / bar	-
												25 LOAD WHEEL	2340
												25 STEER WHEEL	1800
Ø 12"	7.00 - 12	-	-	-	STD	168	658	-	-	5.00 S - 12	-	km/h / bar	-
												25 LOAD WHEEL	2920
												25 STEER WHEEL	2240

STD: Standard

Performance



Traction



Steering Control



Low Rolling Resistance



High Load Capacity



Cut and Chip Resistance




Durability

MAGLIFT GROSS



The new MAGLIFT GROSS has been specially designed for yard tractors and semi-trailer movements in industrial applications, mainly in distribution centers, logistic hubs, container depots. Its wide tread profile provides great lateral stability and higher safety in lifting and cornering operations even with heavy loads. MAGLIFT GROSS has been developed with a reinforced structure that eliminates slippage risks, whilst its special bead shape simplifies mounting operations on the rim.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)	
										Rec.	Alt.		25 LOAD WHEEL	25 STEER WHEEL
														
	355/50 - 20	-	-	-	STD	311	840	-	-	10.00 - 20	-	-	8970	6900

STD: Standard

Performance



Stability



Steering Control



High Load Capacity



Durability

BACKHOE LOADER



MULTIMAX MP 522



MULTIMAX MP 522 is the BKT multi-purpose tire developed for agro-industrial applications. It is suitable for all lifting and loading operations on vehicles such as telehandlers and compact loaders. Stability and traction are its strengths as well as outstanding puncture resistance. Thanks to its special compound, MULTIMAX MP 522 has an incredible cut and chip resistance.

MULTIMAX
RADIAL MPT TIRES

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)									
										Rec.	Alt.	km/h / bar									
										1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4			
280/80 R 18 IND	TL	-	132 A8/B	STD	282	907	421	2748	W 9; 9; 9 SDC	W 8; W 10	50	960	1140	1300	1480	1660	1780	2000	-	-	
											40	960	1140	1300	1480	1660	1780	2000	-	-	
											30	1030	1220	1395	1585	1780	1905	2140	-	-	
											25	1070	1270	1445	1645	1845	1980	2220	-	-	
											10 Cyc.	1170	1440	1695	1950	2220	2415	2730	2880	3000	
											Static	1795	2210	2600	2990	3405	3705	4190	4420	4600	
340/80 R 18 IND (12.5/80 R 18)	TL	-	143 A8/B	STD	343	1006	458	3023	11; 11 SDC; W 11	W 10; 12; 12 SDC	50	1310	1555	1775	2020	2265	2430	2725	-	-	
											40	1310	1555	1775	2020	2265	2430	2725	-	-	
											30	1405	1665	1900	2165	2425	2600	2920	-	-	
											25	1455	1725	1970	2240	2515	2695	3025	-	-	
											10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090	
											Static	2450	3010	3545	4080	4640	5050	5710	6020	6270	
Ø 20"	340/80 R 20 IND	TL	-	144 A8/B	STD	343	1052	481	3212	11	W 10; 11 SDC; W 11; 12; 12 SDC	50	1345	1600	1820	2075	2325	2495	2800	-	-
												40	1345	1600	1820	2075	2325	2495	2800	-	-
												30	1440	1710	1950	2220	2490	2670	3000	-	-
												25	1495	1775	2025	2305	2585	2770	3110	-	-
												10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200
												Static	2515	3095	3640	4190	4770	5185	5865	6185	6440
380/75 R 20 IND (14.5 R 20)	TL	-	148 A8/B	STD	384	1074	483	3251	W 12	W 11; 11; 12	50	1500	1770	2040	2305	2575	2860	3005	3150	-	-
											40	1500	1770	2040	2305	2575	2860	3005	3150	-	-
											30	1610	1900	2195	2490	2780	3075	3220	3370	-	-
											25	1670	1975	2280	2585	2890	3195	3350	3500	-	-
											10 Cyc.	1850	2260	2670	3080	3490	3900	4110	4315	4520	4730
											Static	2840	3470	4100	4730	5360	5990	6305	6620	6935	7250
400/70 R 20 IND (16.0/70 R 20)	TL	-	149 A8/B	STD	404	1068	476	3199	13	12 SDC; 13 SDC; 14	50	1560	1855	2115	2405	2700	2895	3250	-	-	
											40	1560	1855	2115	2405	2700	2895	3250	-	-	
											30	1675	1985	2265	2580	2890	3100	3480	-	-	
											25	1735	2060	2350	2675	3000	3215	3610	-	-	
											10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875	
											Static	2920	3590	4225	4860	5535	6020	6805	7180	7475	

STD: Standard

Technology



Performance



Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)														
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
										DW 12 ; 13 SDC ; DW 13 ; DW 13 L ; DW 14 L																
400/70 R 24 IND	TL	-	152 A8/B	STD	404	1170	533	3527	13			50	1705	2025	2310	2630	2950	3160	3550	-	-					
												40	1705	2025	2310	2630	2950	3160	3550	-	-					
												30	1825	2170	2470	2815	3155	3385	3800	-	-					
												25	1895	2250	2565	2920	3275	3515	3945	-	-					
												10 Cyc.	2080	2560	3010	3465	3945	4290	4850	5115	5325					
												Static	3185	3920	4615	5310	6045	6575	7435	7840	8165					
400/80 R 24 IND	TL	-	162 A8/B	STD	404	1250	553	3778	DW 13		DW 12 ; DW 13 L ; DW 14 L	50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
												40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
												30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-
												25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-
												10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125
												Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925
440/80 R 24 IND	TL	-	161 A8/B	STD	441	1314	586	3958	DW 14 L		DW 13 ; DW 13 L ; DW 15 L	50	2220	2640	3010	3425	3840	4120	4625	-	-					
												40	2220	2640	3010	3425	3840	4120	4625	-	-					
												30	2380	2825	3220	3665	4110	4410	4950	-	-					
												25	2465	2930	3340	3800	4265	4575	5135	-	-					
												10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940					
												Static	4150	5110	6015	6920	7875	8570	9685	10215	10640					
460/70 R 24 IND (17.5L R 24)	TL	-	159 A8/B	STD	465	1250	568	3766	DW 15 L		DW 14 L ; DW 16 L	50	2100	2495	2845	3240	3635	3895	4375	-	-					
												40	2100	2495	2845	3240	3635	3895	4375	-	-					
												30	2250	2675	3050	3470	3890	4170	4685	-	-					
												25	2335	2775	3160	3600	4035	4330	4860	-	-					
												10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565					
												Static	3930	4835	5690	6545	7450	8105	9160	9665	10065					
500/70 R 24 IND (19.5L R 24)	TL	-	164 A8/B	STD	503	1310	595	3940	DW 16 L		DW 15 L ; DW 18 L	50	2400	2850	3250	3700	4150	4450	5000	-	-					
												40	2400	2850	3250	3700	4150	4450	5000	-	-					
												30	2570	3050	3480	3960	4445	4765	5350	-	-					
												25	2665	3165	3610	4110	4610	4940	5550	-	-					
												10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500					
												Static	4485	5520	6500	7475	8510	9260	10465	11040	11500					
540/70 R 24 IND	TL	-	168 A8/B	STD	530	1366	611	4133	DW 16 L		DW 18 L	50	2690	3195	3640	4145	4650	4985	5600	-	-					
												40	2690	3195	3640	4145	4650	4985	5600	-	-					
												30	2880	3420	3900	4440	4980	5340	5995	-	-					
												25	2990	3550	4045	4605	5165	5540	6220	-	-					
												10 Cyc.	3280	4035	4750	5460	6220	6765	7645	8065	8400					
												Static	5025	6185	7280	8375	9535	10370	11725	12365	12880					

Technology



Steel Belted



Special Compound

Performance



Stability



Traction




High Puncture Resistance



Cut and Chip Resistance

STD: Standard

MULTIMAX MP 522

Ø 26"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)															
										Rec.	Alt.	km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6					
												50	40	30	25	10 Cyc.	Static	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4
480/80 R 26 IND	TL	-	160 A8/B	STD	479	1428	638	4287	DW 15 L	DW 16 L	50	2610	3060	3330	3555	3780	4005	4275	4500	-	-						
											40	2610	3060	3330	3555	3780	4005	4275	4500	-	-						
											30	2795	3275	3565	3805	4045	4290	4575	4815	-	-						
											25	2900	3400	3700	3950	4200	4450	4750	4995	-	-						
											10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750						
											Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350						
											km/h / bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.2	4.4	
480/80 R 26 IND	TL	-	167 A8/B	STD	479	1428	638	4287	DW 15 L	DW 16 L	50	2575	2815	3055	3295	3540	3780	4020	4260	4500	4740	4975	5215	5450	-	-	
											40	2575	2815	3055	3295	3540	3780	4020	4260	4500	4740	4975	5215	5450	-	-	
											30	2790	3045	3300	3550	3805	4060	4315	4565	4820	5075	5330	5580	5835	-	-	
											25	2890	3155	3420	3680	3945	4210	4475	4735	5000	5265	5525	5790	6050	-	-	
											10 Cyc.	3200	3555	3910	4265	4620	4975	5330	5685	6040	6395	6750	7105	7460	7815	-	-
											Static	4900	5445	5990	6535	7080	7625	8170	8715	9260	9805	10350	10895	11445	11990	12535	
											km/h / bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.2	4.4	
Ø 28"	440/80 R 28 IND	TL	-	156 A8/B	STD	441	1415	643	4278	DW 14 L	DW 13 ; DW 13 L ; DW 15 L	50	2300	2725	2940	3150	3360	3575	3790	4000	-	-					
												40	2300	2725	2940	3150	3360	3575	3790	4000	-	-					
												30	2480	2930	3155	3380	3605	3830	4055	4280	-	-					
												25	2570	3040	3270	3505	3740	3970	4205	4440	-	-					
												10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000					
												Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200					
												km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6					

STD: Standard

Technology



Steel Belted



Special Compound

Performance



Stability



Traction



High Puncture Resistance



Cut and Chip Resistance



RT 747 AGRO INDUSTRIAL



RT 747 AGRO INDUSTRIAL is a radial agro-industrial tire suitable for compact loaders and telehandlers. Its extra wide lugs provide excellent traction and great stability in lifting operations. It has been designed with a special cut-and-chip resistance compound that enables the tire to carry heavy loads. RT 747 AGRO INDUSTRIAL is the right answer to all general farming operations that need outstanding versatility.

Ø 16"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)																				
										Rec.	Alt.	km/h / bar	1.2	1.6	2.0	2.2	2.4	2.6														
												10	30	40	1.2	1.6	2.0	2.2	2.4	2.6												
Ø 16"	11L R 16	TL	-	122 A8/B	STD	290	850	371	2497	W 8	W 10 L	10	30	40	1.2	1.6	2.0	2.2	2.4	2.6												
												1265	940	880	1265	1530	1790	1920	2055	2200												
												1165	1165	1085	1165	1385	1500	1610	-	-												
												1385	1385	1295	1385	1500	1610	1500	-	-												
Ø 24"	460/70 R 24 (17.5L R 24)	TL	-	152 A8/B	STD	465	1254	556	3840	DW 15 L	DW 14 L; DW 16 L	50	40	30	25	10 Cyc	Static	1.2	1.6	2.0	2.4	2.8	3.2	3.5	4.0							
												1670	1670	1785	1850	2505	3505	1670	2060	2415	2805	3160	3550	3550	3800	3940	4205	4740	5325	5890	6635	7455
												2060	2205	2285	3090	4325	2060	2205	2585	3000	3380	3800	4000	4375	4550	4860	5445	5845	6565	10065		
												2415	2585	2680	3620	5070	2415	2585	2680	3115	3505	3940	4130	4640	4860	5445	5845	6565	10065			
												2805	3000	3115	4205	5890	2805	3000	3115	3115	3505	3940	4130	4640	4860	5445	5845	6565	10065			
												3160	3380	3505	4740	6635	3160	3380	3505	3505	3940	4375	4550	4860	5445	5845	6565	10065				
												3550	3800	3940	5325	7455	3550	3800	3940	3940	4375	4550	4860	5445	5845	6565	10065					
												3940	4375	4550	5325	7455	3940	4375	4550	4550	5325	5845	6565	10065								
												4740	5325	5845	6565	10065	4740	5325	5845	5845	6565	10065										
												Ø 24"	460/70 R 24 (17.5L R 24)	TL	-	159 A8/ 156 B	STD	465	1254	556	3840	DW 15 L	DW 14 L; DW 16 L	50	40	30	25	10 Cyc	Static	1.2	1.6	2.0
1535	1705	1775	1805	2560	3920	1535	1705	1775	1805	2560	3920													1705	2100	2185	2225	3150	4830			
1890	2100	2185	2225	3150	4830	1890	2100	2185	2225	3150	4830													2100	2495	2595	2645	3745	5740			
2245	2495	2595	2645	3745	5740	2245	2495	2595	2645	3745	5740													2495	2845	2960	3015	4270	6545			
2560	3240	3370	3435	4860	7450	2560	3240	3370	3435	4860	7450													3240	3630	3775	3850	5445	8350			
2915	3630	3775	3850	5445	8350	2915	3630	3775	3850	5445	8350													3630	3895	4050	4130	5845	8960			
3265	3895	4050	4130	5845	8960	3265	3895	4050	4130	5845	8960													3895	4375	4550	4640	6565	10065			
3505	4375	4550	4640	6565	10065	3505	4375	4550	4640	6565	10065													4375	4550	4640	6565	10065				
4000	4375	4550	4640	6565	10065	4000	4375	4550	4640	6565	10065													4375	4550	4640	6565	10065				
4000	4375	4550	4640	6565	10065	4000	4375	4550	4640	6565	10065													4375	4550	4640	6565	10065				
Ø 24"	500/70 R 24 (19.5L R 24)	TL	-	157 A8/ 154 B	STD	485	1320	585	3949	DW 16 L	DW 15 L; DW 18 L	50	40	30	25	10 Cyc	Static	1.2	1.6	2.0	2.4	2.8	3.0									
												1765	1940	2075	2155	2910	4075	1765	1940	2075	2155	2910	4075	1940	2395	2560	2655	3590	5025			
												2175	2395	2560	2655	3590	5025	2175	2395	2560	2655	3590	5025	2395	2805	3000	3115	4210	5890			
												2550	2805	3000	3115	4210	5890	2550	2805	3000	3115	4210	5890	2805	3260	3490	3620	4890	6845			
												2965	3260	3490	3620	4890	6845	2965	3260	3490	3620	4890	6845	3260	3670	3930	4075	5510	7710			
												3340	3670	3930	4075	5510	7710	3340	3670	3930	4075	5510	7710	3670	4125	4415	4580	6190	8665			
												3750	4125	4415	4580	6190	8665	3750	4125	4415	4580	6190	8665	4125	4415	4580	6190	8665				
												4125	4415	4580	6190	8665	8665	4125	4415	4580	6190	8665	8665	4415	4580	6190	8665					
												4580	6190	8665	8665	8665	8665	4580	6190	8665	8665	8665	8665	6190	8665	8665	8665	8665				
												4580	6190	8665	8665	8665	8665	4580	6190	8665	8665	8665	8665	6190	8665	8665	8665	8665				

STD: Standard

Technology



Performance



BK 826



BK 826 has been specially designed for trailers in haulage applications. It is a bias tire featuring high load capacity thanks to its reinforced carcass. BK 826 is also available as "industrial" version that shows particular cut and chip resistance and is also suitable for backhoe loaders.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
8.25 - 16	TT	14	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	6.90	
											100 LS	1745	
											100 LD	1650	
8.25 - 16	TT	16	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.60	
											100 LS	1850	
											100 LD	1750	
8.25 - 16	TT	18	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.95	
											100 LS	1900	
											100 LD	1800	
8.25 - 16	TT	8	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	4.25	
											100 LS	1350	
											100 LD	1275	
8.25 - 16	TT	16	-	IND	238	863	-	-	6.50 H	6.00 G	km/h / bar	8.40	
											40 LS	2130	
											40 LD	2015	
8.25 - 16	TT	18	-	IND	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.95	
											100 LS	1900	
											100 LD	1800	
8.25 - 16	TT	16	134A8	TR TR	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.60	
											40	2120	
9.00 - 16	TT	12	-	STD	265	925	-	-	6.50 H	6.00 G	km/h / bar	5.15	
											30	1900	

Technology



Reinforced
Carcass

Performance




Cut and Chip
Resistance



High Load
Capacity

STD: Standard - IND: Industrial - TR TR: Tractor Trailer

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
9.00 - 16	TT	14	-	STD	265	925	-	-	6.50 H	6.00 G	30	6.20	
												2120	
9.00 - 16	TT	16	-	STD	265	925	-	-	6.50 H	6.00 G	30	7.25	
												2300	
9.00 - 16	TT	18	-	STD	265	925	-	-	6.50 H	6.00 G	30	7.60	
												2360	
9.00 - 16	TT	16	-	IND	265	925	-	-	6.50 H	6.00 G	30	7.25	
												2300	
9.00 - 16	TT	12	-	SPL	265	925	-	-	6.50 H	6.00 G	30	5.15	
												1900	
9.00 - 16	TT	18	138A6	TR TR	265	925	-	-	6.50 H	6.00 G	30	7.60	
												2360	
9.00 - 16	TT	18	138A8	TR TR	265	925	-	-	6.50 H	6.00 G	30	7.60	
												2360	

STD: Standard - IND: Industrial - TR TR: Tractor Trailer - SPL: Special

Technology



Reinforced
Carcass

Performance



Cut and Chip
Resistance



High Load
Capacity





BACKHOE
LOADER

 Bias

BK 6060



BK 6060 is a both field- and road-oriented tire for trailers and backhoe loaders in transport as well as digging and loading applications. This block pattern tire provides an extended tire life-cycle.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)	
										Rec.	Alt.		7.25	2300
														
9.00 - 16	TT	16	-	IND	255	925	427	2740	6.50 H	6.00 G	30	7.25	2300	

IND: Industrial

Technologies



Special
Compound

Performance



Durability





On/Off Road



MP 570



MP 570 is an agro-industrial tire, which is suitable for excavators and backhoe loaders. This tire provides good traction and durability, as well as excellent self-cleaning properties in all operating conditions.

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
12.5 - 18	TL	12	-	STD	308	990	450	2950	11	12 SDC	km/h / bar	3.50	
											80	2030	
											50	2180	
12.5 - 18	TL	10	-	STD	308	990	450	2950	11	12 SDC	km/h / bar	3.00	
											80	1930	
											50	2000	
Ø 20	12.5 - 20	TL	10	-	STD	335	1050	480	3130	11	12 SDC	km/h / bar	3.00
												80	1850
												50	2065
12.5 - 20	TL	12	-	STD	335	1050	480	3130	11	12 SDC	km/h / bar	3.50	
											80	2060	
											50	2300	
14.5 - 20	TL	12	-	STD	360	1116	505	3325	11	12 SDC	km/h / bar	3.00	
											65	2430	
											50	2500	

Performance



Durability




Traction



Self-Cleaning

STD: Standard

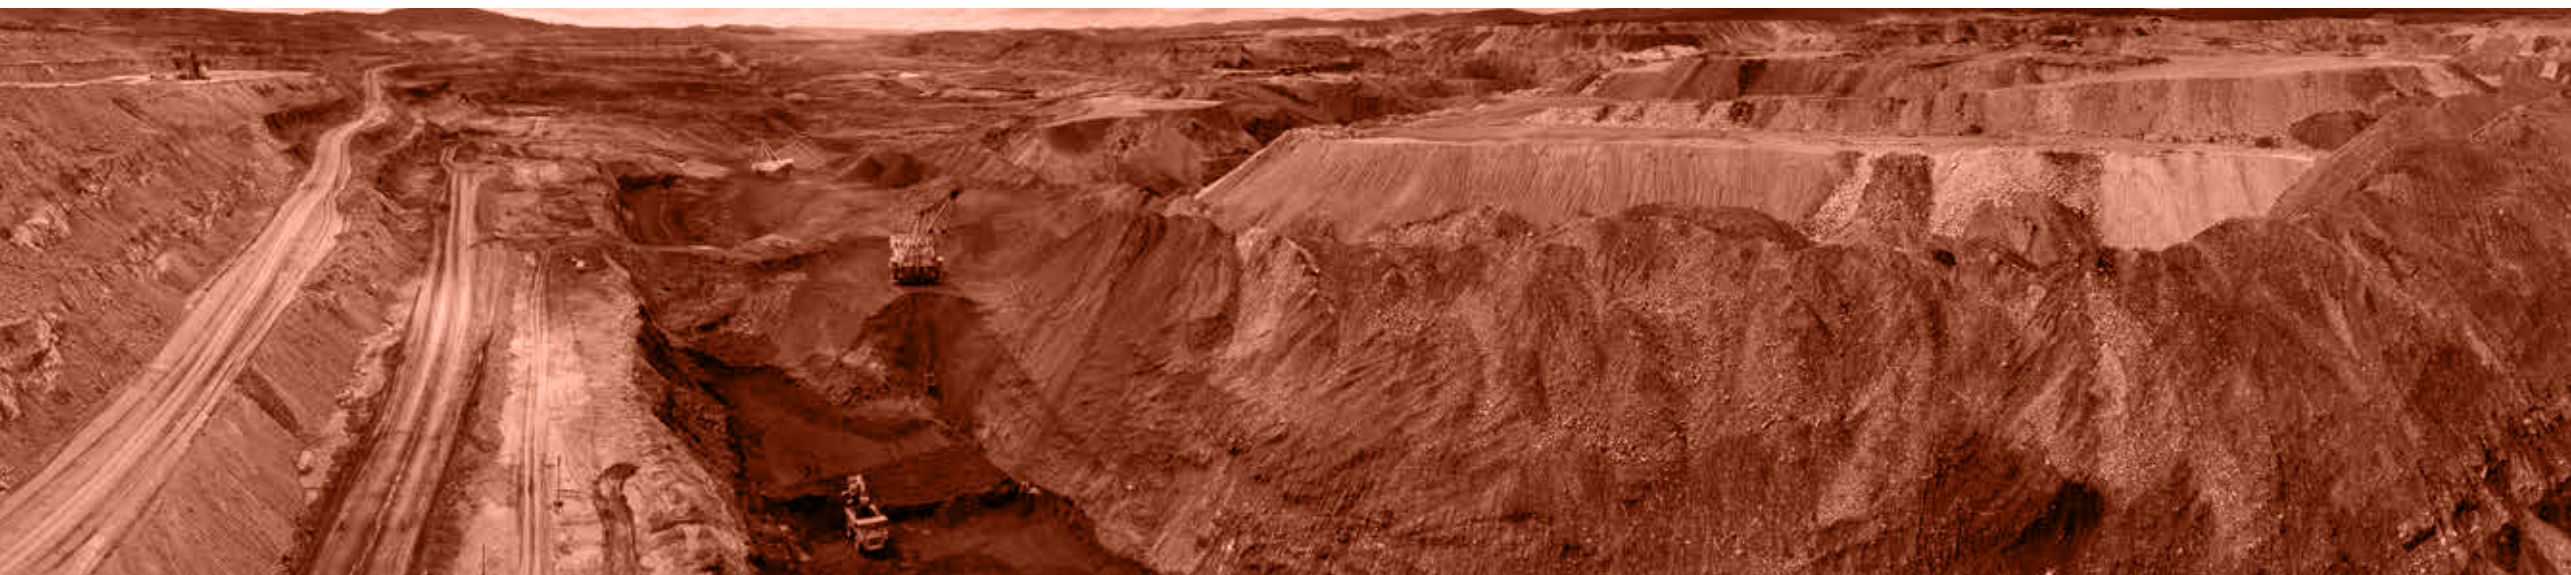

AT 603



AT 603 is a bias agro-industrial tire for implement machinery and backhoe loaders. AT 603 has been engineered to ensure great durability and traction on drive wheels providing best performance on every surface as well as excellent self-cleaning properties. The AT 603 "special" version has a reinforced casing, while the "HD" version offers improved cut and chip resistance.

Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive Wheel	Free Rolling						Rec.	Alt.		
10.5/80 - 18	TL	10	119A8	131A8	STD	274	907	422	2727	W 9	W 8,9	10 FR	2730	
												25 FR	2320	
												30 FR	2185	
												40 FR	1950	
												10 DW	1905	
												25 DW	1620	
												30 DW	1525	
												40 DW	1360	
10.5/80 - 18	TL	10	119A8	131A8	HD	274	907	422	2727	W 9	W 8,9	10 FR	2730	
												25 FR	2320	
												30 FR	2185	
												40 FR	1950	
												10 DW	1905	
												25 DW	1620	
												30 DW	1525	
												40 DW	1360	
10.5/80 - 18	TL	10	119A8	131A8	SPL	274	907	422	2727	W 9	W 8,9	10 FR	2730	
												25 FR	2320	
												30 FR	2185	
												40 FR	1950	
												10 DW	1905	
												25 DW	1620	
												30 DW	1525	
												40 DW	1360	
12.5/80 - 18	TL	12	129A8	142A8	STD	308	1000	448	3027	W 9	11	10 FR	3710	
												25 FR	3155	
												30 FR	2970	
												40 FR	2650	
												10 DW	2590	
												25 DW	2200	
												30 DW	2070	
												40 DW	1850	

Technology



Heavy Duty



Reinforced Carcass

Performance



Durability



Traction



Self-Cleaning



Cut and Chip Resistance

STD: Standard - HD: Heavy duty - SPL: Special



AT 603

Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)							
				Drive Wheel	Free Rolling						Rec.	Alt.	Load capacity (kg/tire)							
													km/h / bar							
12.5/80 - 18	TL	16	135 A8	148 A8	STD	308	1000	448	3027	W 9	11	4.90								
												10 FR				4410				
												25 FR				3750				
												30 FR				3530				
												40 FR				3150				
												10 DW				3050				
												25 DW				2595				
												30 DW				2440				
40 DW				2180																
12.5/80 - 18	TL	18	138 A8	150 A8	STD	308	1000	448	3027	W 9	11	5.50								
												10 FR				4690				
												25 FR				3985				
												30 FR				3750				
												40 FR				3350				
												10 DW				3305				
												25 DW				2810				
												30 DW				2645				
40 DW				2360																
12.5/80 - 18	TL	12	129 A8	142 A8	SPL	308	1000	448	3027	W 9	11	3.70								
												10 FR				3710				
												25 FR				3155				
												30 FR				2970				
												40 FR				2650				
												10 DW				2590				
												25 DW				2200				
												30 DW				2070				
40 DW				1850																
Ø 25"	15.5 - 25	TL	12	-	-	STD	410	1265	577	3861	12.00/1.3	12.00/1.3 (DC)	2.50							
													km/h / bar				2.50	4.00	2.50	
													50				3250	-	-	
													10				-	5600	-	
40				-	-	2650														

STD: Standard - SPL: Special

Technology



Heavy Duty



Reinforced Carcass

Performance



Durability



Traction



Self-Cleaning



Cut and Chip Resistance

AT 621



AT 621 is suitable for backhoe loaders and compact loaders in all digging and loading operations in agriculture. The AT 621 tire features an extra deep tread which ensures great cut and chip resistance and higher durability. In addition, this BKT tire ensures great durability and self cleaning properties. AT 621 is available in several versions to meet the most differing user requirements.

Ø 15"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar		
33 X 12.5 - 15	TT	8	-	-	-	STD	318	851	394	2507	10.00 F SDC	-	10	3.25	2130	
													30	5.25	1750	
Ø 15.3"	10.0/75 - 15.3	TL	10	127A6	-	-	STD	267	780	373	2385	9.0	-	10	4.4	2240
														30	7.25	2300
Ø 16"	12.5/70 - 16	TL	14	-	-	-	STD	315	855	385	2584	10 LB	-	10	2.60	1645
														30	4.4	2240
12.5/70 - 16	TT	14	-	-	-	STD	315	855	385	2584	10 LB	-	10	4.4	2240	
													30	7.25	2300	
12.5/70 - 16	TL	8	-	-	-	STD	315	855	385	2584	10 LB	-	10	2.60	1645	
													30	4.4	2240	
9.00 - 16	TT	16	137A6	-	-	IND	260	925	-	-	6.50 H	6.00 G	10	2.60	1645	
													30	4.4	2240	
Ø 18"	12.5/80 - 18	TL	12	-	129 A8	142 A8	STD	308	987	434	2916	W 9	11.0	10 FR	3.70	3710
														25 FR		3155
														30 FR		2970
														40 FR		2650
														10 DW		2590
														25 DW		2200
														30 DW		2070
														40 DW		1850

STD: Standard - IND: Industrial

Performance



Durability



Traction



Self-Cleaning



Cut and Chip Resistance

AT 621

Ø 18"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
12.5/80 - 18	TT	12	-	129 A8	142 A8	STD	308	987	434	2916	W 9	11.0	km/h / bar	3.70	
													10 FR	3710	
													25 FR	3155	
													30 FR	2970	
													40 FR	2650	
													10 DW	2590	
													25 DW	2200	
													30 DW	2070	
40 DW	1850														
12.5/80 - 18	TL	12	-	129 A8	142 A8	SPL	308	987	434	2916	W 9	11.0	km/h / bar	3.70	
													10 FR	3710	
													25 FR	3155	
													30 FR	2970	
													40 FR	2650	
													10 DW	2590	
													25 DW	2200	
													30 DW	2070	
40 DW	1850														
12.5/80 - 18	TT	16	-	135 A8	148 A8	STD	308	987	434	2916	W 9	11.0	km/h / bar	4.90	
													10 FR	4410	
													25 FR	3750	
													30 FR	3530	
													40 FR	3150	
													10 DW	3050	
													25 DW	2595	
													30 DW	2440	
40 DW	2180														
12.5/80 - 18	TL	16	-	135 A8	148 A8	STD	308	987	434	2916	W 9	11.0	km/h / bar	4.90	
													10 FR	4410	
													25 FR	3750	
													30 FR	3530	
													40 FR	3150	
													10 DW	3050	
													25 DW	2595	
													30 DW	2440	
40 DW	2180														
12.5/80 - 18	TL	16	-	135 A8	148 A8	IND HD	308	987	434	2916	W 9	11.0	km/h / bar	4.90	
													10 FR	4410	
													25 FR	3750	
													30 FR	3530	
													40 FR	3150	
													10 DW	3050	
													25 DW	2595	
													30 DW	2440	
40 DW	2180														

Performance

- Durability
- Traction
- Self-Cleaning
- Cut and Chip Resistance

STD: Standard - SPL: Special - IND HD: Industrial Heavy Duty

AT 621

Ø 18"	Tire size	TYPE	PR	LI/SS	LI/SS			S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
					Drive Wheel	Free Rolling	Version					Rec.	Alt.			
					km/h / bar	2.60										
Ø 18"	15.5/60 - 18	TL	10	139A2	-	-	STD	394	940	428	2871	W 13	-	10	2430	
	15.5/60 - 18	TL	12	141A2	-	-	STD	394	940	428	2871	W 13	-	km/h / bar	3.00	
														10	2575	
15.5/70 - 18 (400/70 - 18)	TL	10	-	-	-	STD	400	1030	474	3111	W 13	-	km/h / bar	2.60		
													10	2700		
Ø 19.5"	385/65 D 19.5	TL	16	165A2	-	-	STD	390	1020	478	3136	11.75	12.25	km/h / bar	6.90	
														10	5150	
														0 (STATIONARY)	6700	
Ø 20"	12.5 - 20	TT	12	-	-	-	STD	325	1040	-	-	11.0	-	km/h / bar	3.50	
														40 FR	3350	
														40 DW	2300	
	17.5/65 - 20	TL	10	-	-	-	STD	450	1090	490	3294	W 14 L	-	km/h / bar	2.40	
														10	3195	
	400/70 - 20	TL	16	149A8	-	-	STD	405	1090	494	3271	13	12 SDC; 13 SDC; 14	km/h / bar	4.00	
														40	3250	
	400/70 - 20	TL	16	152 B/ 168 A2	-	-	STD	405	1090	494	3271	13	12 SDC; 13 SDC; 14	km/h / bar	4.00	5.00
														50	3550	-
														10	-	5600
	42 X 17 - 20	TT	10	-	-	-	STD	432	1073	480	3198	14.00 TG SDC	-	km/h / bar	3.00	
														10	3690	
Ø 24"	16.9 - 24	TL	12	149A8	-	-	IND	450	1302	590	3906	DW 15 L	DW 14 L	km/h / bar	2.60	
														40	3250	

Performance



Durability



Traction



Self-Cleaning



Cut and Chip
Resistance

STD: Standard - IND: Industrial



Ø 24"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar		
17.5L - 24	TL	8	139A8	-	-	STD	450	1255	558	3752	DW 15 L	DW 14 L	40	1.70	2430	
													40	2.30	3450	
19.5L - 24	TL	12	151A8	-	-	STD	482	1305	587	3936	DW 16 L	-	40	2.50	4000	
													40	2.60	3550	
Ø 26"	18.4 - 26	TL	12	156A8	-	-	STD	480	1425	649	4288	DW 16 L	DW 15 L	40	2.60	3550
														40	2.90	3750
														40	2.60	3550
Ø 28"	16.9 - 28	TT	12	152A8	-	-	IND	450	1410	639	4199	DW 15 L	DW 14 L	40	2.60	3550
														40	2.90	3750
														40	2.60	3550
Ø 30"	16.9 - 30	TL	12	153A8	-	-	IND	450	1460	670	4398	DW 15 L	DW 14 L	40	2.60	3650
														40	2.90	3750
														40	2.60	3550

Performance



Durability



Traction



Self-Cleaning



Cut and Chip
Resistance

STD: Standard - IND: Industrial



AT 625



AT 625 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. Its extra deep tread ensures increased puncture resistance and durability. AT 625 features excellent traction and stability as well as improved cut and chip resistance.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
14.9 - 24	TL	12	145 A8	STD	400	1265	575	3800	DW 13	DW 11; DW 12; DW 13 L	km/h / bar	2.90	
											40	2900	
14.9 - 24	TT	12	145 A8	STD	400	1265	575	3800	DW 13	DW 11; DW 12; DW 13 L	km/h / bar	2.90	
											40	2900	
Ø 28"	16.9 - 28	TT	12	152 A8	IND	450	1415	645	4254	DW 15 L	DW 14 L	km/h / bar	2.60
												40	3550
16.9 - 28	TL	12	152 A8	IND	450	1415	645	4254	DW 15 L	DW 14 L	km/h / bar	2.60	
											40	3550	
16.9 - 28	TT	12	152 A8	SPL	450	1415	645	4254	DW 15 L	DW 14 L	km/h / bar	2.60	
											40	3550	

STD: Standard - IND: Industrial - SPL: Special

Technology



Extra Deep Tread

Performance



Cut and Chip Resistance




High Puncture Resistance



Stability



Traction

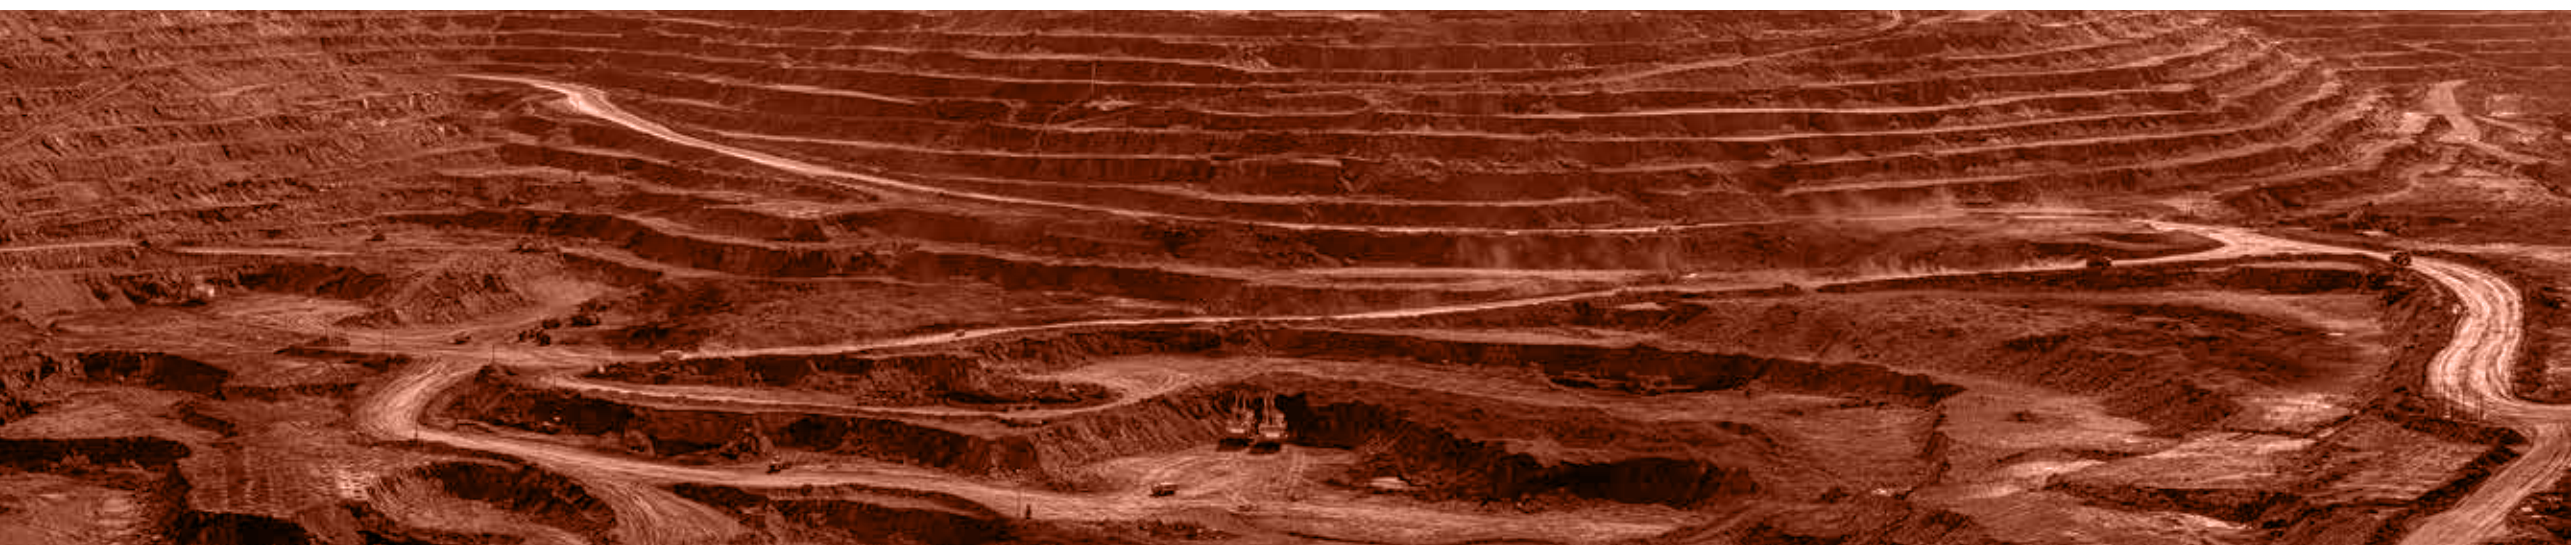

CON STAR



CON STAR is particularly suitable for compact loaders and telehandlers in agro-industrial, lifting and loading applications. It features great traction along with excellent vertical and horizontal stability. CON STAR has been made of a cut-and-chip-resistant compound contributing to an extended tire life-cycle.

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
340/80 - 18 (12.5/80 - 18)	TL	-	143 A8	IND	350	1015	465	3040	11	12; 11 SDC; 12 SDC; W 10; W 11	km/h / bar	4.00	
											40	2725	
340/80 - 20 (12.5/80 - 20)	TL	-	144 A8	IND	350	1065	491	3272	11	12; 11 SDC; 12 SDC; W 10; W 11	km/h / bar	4.00	
											40	2800	
380/75 - 20 (14.5 - 20)	TL	-	148 A8	IND	385	1080	500	3273	W 12	W 11; 12 SDC; 12; W 13; 13 SDC; 13	km/h / bar	4.00	
											40	3150	
400/70 - 20 (16.0/70 - 20)	TL	16	149 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14	km/h / bar	4.00	
											40	3250	
400/70 - 20 (16.0/70 - 20)	TL	-	156 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14	km/h / bar	5.00	
											40	4000	
Ø 24"	400/70 - 24 (16.0/70 - 24)	TL	-	158 A8	IND	395	1175	544	3556	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L	km/h / bar	5.00
												40	4250
400/80 - 24 (15.5/80 - 24)	TL	20	162 A8	IND	405	1250	570	3781	DW 13	DW 12; DW 13 L; DW 14 L	km/h / bar	5.00	
											40	4750	


IND: Industrial

Technology



Performance



Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	5.00
													40	5600
	440/80 - 24 (17.0/80 - 24)	TL	22	168A8	IND	455	1315	610	3986	DW 14 L	DW 13 ; DW 13 L ; DW 15 L		40	5600
													km/h / bar	4.00
													40	4375
													km/h / bar	4.00
													40	5000
	460/70 - 24 (17.5L - 24)	TL	-	159A8	IND	460	1250	562	3784	DW 15 L	DW 14 L ; DW 16 L		40	4375
													km/h / bar	4.00
													40	5000
													km/h / bar	3.20
													40	4500
													km/h / bar	3.20
													40	4000
	500/70 - 24 (19.5L - 24)	TL	-	164A8	IND	505	1300	579	3926	DW 16 L	DW 15 L ; DW 18 L		40	5000


Technology



Performance



IND: Industrial

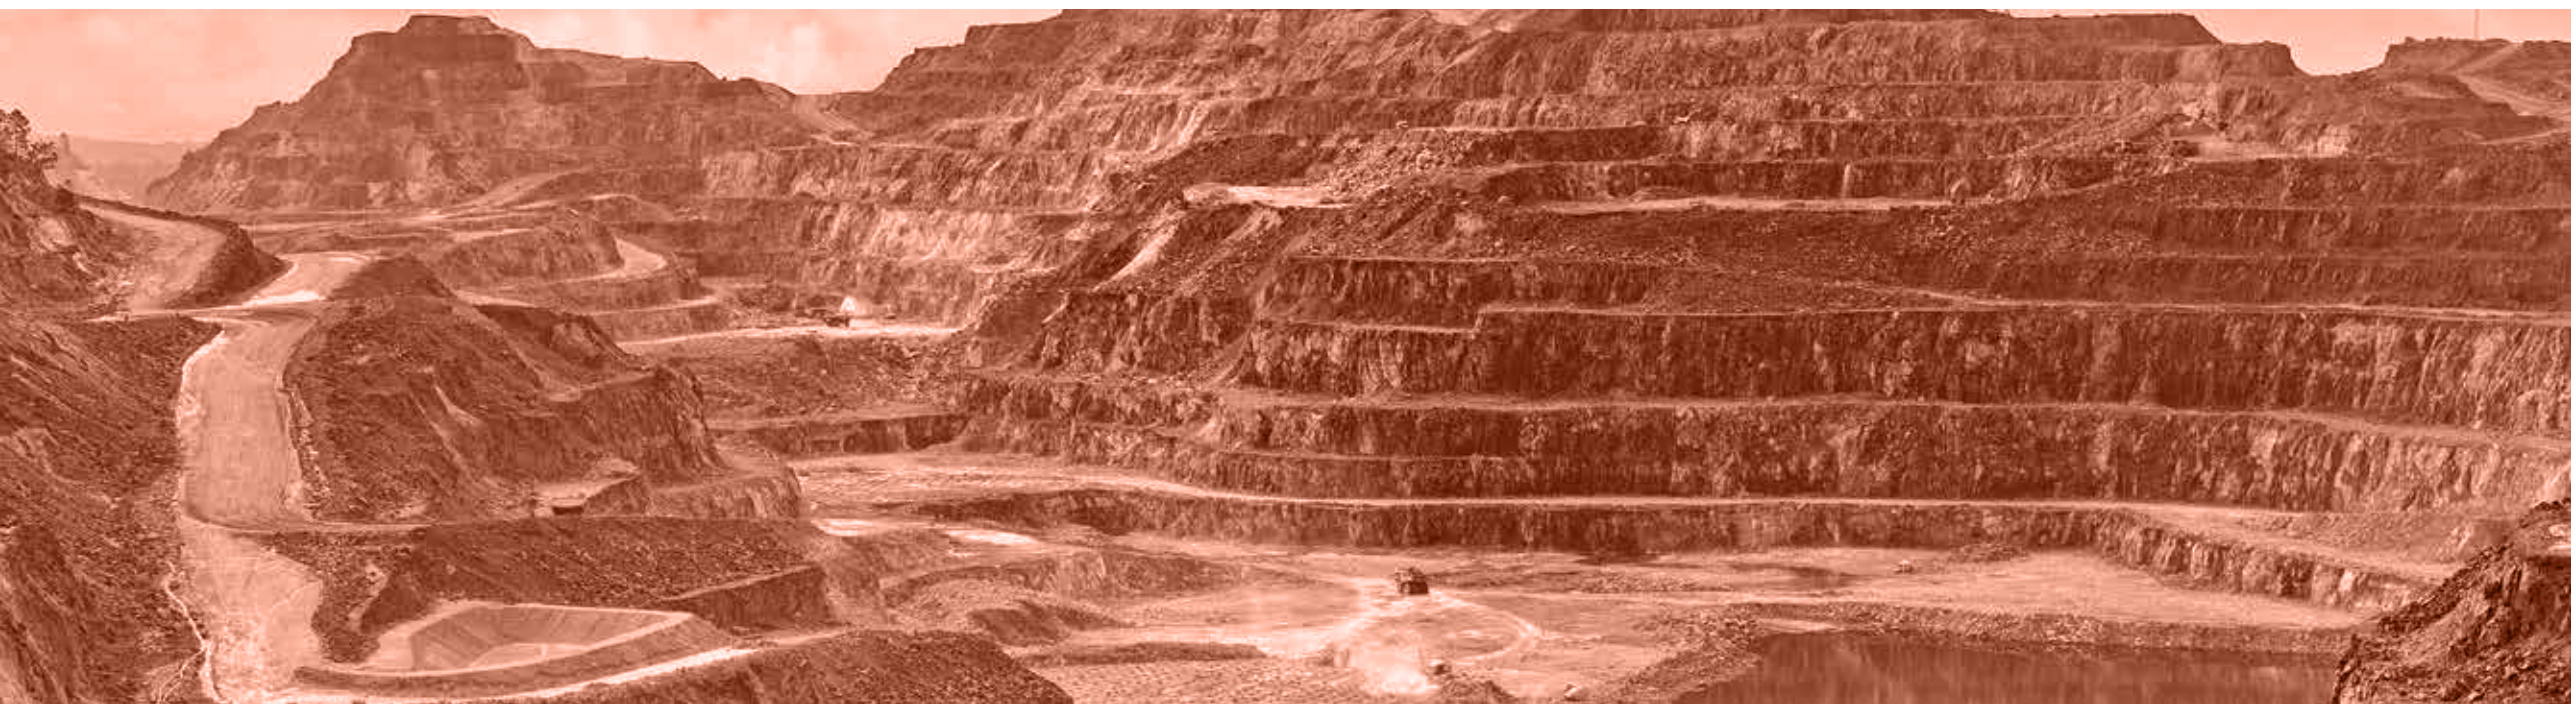

TR 459



TR 459 has been particularly designed for digging and loading operations as well as municipality and maintenance applications with tractors and backhoe loaders. It offers high stability and is available in two versions. The "special" version provides an extended tire life-cycle.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)		
										Rec.	Alt.		km/h / bar		
400/70 - 20	TL	-	149A8	IND	404	1090	-	-	13	12 SDC ; 13 SDC ; 14		40	4.00	3250	
										40					
Ø 24"	14.9 - 24	TL	8	137A8	IND	390	1244	562	3657	DW 13	DW 12 ; DW 11 ; DW 13 L		40	2.10	2300
											40				
14.9 - 24	TL	12	145A8	IND	390	1244	562	3657	DW 13	DW 12 ; DW 11 ; DW 13 L		40	2.90	2900	
										40					
16.9 - 24	TL	8	142A8	IND	450	1310	590	3850	DW 15 L	DW 14 L		40	1.90	2650	
										40					
16.9 - 24	TL	10	145A8	IND	450	1310	590	3850	DW 15 L	DW 14 L		40	2.20	2900	
										40					
16.9 - 24	TL	12	149A8	IND	450	1310	590	3850	DW 15 L	DW 14 L		40	2.60	3250	
										40					
17.5L - 24	TL	8	139A8	IND	445	1270	557	3825	DW 15 L	DW 14 L		40	1.70	2430	
										40					
17.5L - 24	TL	10	144A8	IND	445	1270	557	3825	DW 15 L	DW 14 L		40	2.20	2800	
										40					

Performance




Stability



Traction

IND: Industrial



Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
17.5L - 24	TL	12	148 A8	IND	445	1270	557	3825	DW 15 L	DW 14 L	km/h / bar	2.70	
											40	3150	
18.4 - 24	TL	12	155 A8	IND	472	1375	610	4114	DW 16 L	DW 15 L	km/h / bar	2.50	
											40	3875	
19.5L - 24	TL	10	147 A8	IND	490	1333	585	4031	DW 16 L	-	km/h / bar	1.90	
											40	3075	
19.5L - 24	TL	12	151 A8	IND	490	1333	585	4031	DW 16 L	-	km/h / bar	2.30	
											40	3450	
19.5L - 24	TL	12	151 A8	IND SPL	490	1333	585	4031	DW 16 L	-	km/h / bar	2.30	
											40	3450	
21L - 24	TL	12	155 A8	IND	533	1378	605	3995	DW 18 L	-	km/h / bar	2.20	
											40	3875	
21L - 24	TL	14	157 A8	IND	533	1378	605	3995	DW 18 L	-	km/h / bar	2.50	
											40	4125	
Ø 26"	18.4 - 26	TL	12	156 A8	IND	472	1425	628	4346	DW 16 L	DW 15 L	km/h / bar	2.50
												40	4000
18.4 - 26	TL	14	159 A8	IND	472	1425	628	4346	DW 16 L	DW 15 L	km/h / bar	2.90	
											40	4375	
18.4 - 26	TL	16	162 A8	IND	472	1425	628	4346	DW 16 L	DW 15 L	km/h / bar	3.30	
											40	4750	

Performance




Stability



Traction

IND: Industrial - IND SPL: Industrial Special

Ø 28"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	1.90
												40	2900
16.9 - 28	TL	8	145A8	IND	440	1410	640	4145	DW 15 L	DW 14 L	40	2900	
16.9 - 28	TL	10	148A8	IND	440	1410	640	4145	DW 15 L	DW 14 L	40	3150	
16.9 - 28	TL	12	152A8	IND	440	1410	640	4145	DW 15 L	DW 14 L	40	3550	
18.4 - 28	TL	12	157A8	IND	472	1475	664	4495	DW 16 L	DW 15 L	40	4125	
21L - 28	TL	12	157A8	IND	535	1480	-	-	DW 18 A	-	40	4125	
Ø 30"	16.9 - 30	TL	12	153A8	IND	440	1470	657	4484	DW 15 L	DW 14 L	40	3650
											40	2.70	

Performance



Stability



Traction

IND: Industrial



TR 461 (R-4)



TR 461 is a BKT pattern suitable for municipality and maintenance applications with tractors as well as for loading operations with telehandlers. The sidewall protection features particular resistance against cuts and bruises providing a longer life even on hard surfaces in addition to excellent stability.

Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)					
				Drive Wheel	Free Rolling						Rec.	Alt.						
12.5/80 - 18	TL	12	-	129A8	142A8	STD	305	987	435	2902	W 9	11	km/h / bar	3.70				
													10 FR	3710				
													25 FR	3155				
													30 FR	2970				
													40 FR	2650				
													10 DW	2590				
													25 DW	2200				
				30 DW	2070													
				40 DW	1850													
				12.5/80 - 18	TL	18	-	138A8	150A8	STD	305	987	435	2902	W 9	11	km/h / bar	5.50
																	10 FR	4690
																	25 FR	3985
																	30 FR	3750
																	40 FR	3350
10 DW	3305																	
25 DW	2810																	
30 DW	2645																	
40 DW	2360																	
Ø 24"	16.9 - 24	TL	14	151A8	-	-	STD	440	1280	566	3763	DW 15 L	DW 14 L	km/h / bar	2.90			
														40	3450			
	19.5L - 24	TL	12	151A8	-	-	STD	490	1310	578	3851	DW 16 L	-	km/h / bar	2.30			
														40	3450			
	19.5L - 24	TL	14	154A8	-	-	STD	490	1310	578	3851	DW 16 L	-	km/h / bar	2.60			
														40	3750			
	21L - 24	TL	14	157A8	-	-	STD	540	1385	607	4072	DW 18 L	-	km/h / bar	2.50			
														40	4125			

STD: Standard

Performance



Ø 28"	Tire size	TYPE	PR	LI/SS	LI/SS			S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling	Version					Rec.	Alt.		
16.9 - 28	TL	14	154 A8	-	-	STD	440	1390	620	4087	DW 15 L	DW 14 L	40	3750	
Ø 34"	620/60 B 34	TL	-	175 A8	-	-	HD	615	1629	750	4930	DW 20 B	-	4.00	6900
														40	

STD: Standard - HD: Heavy Duty

Performance



Cut and Chip Resistance



Durability



Road Oriented



Stability



TR 463



TR 463 has been specially designed for backhoe loaders and industrial tractors. Made of a superior tread compound and featuring a strong nylon casing, this tire stands for best results in industrial and OTR applications, and on construction sites. TR 463 provides excellent traction for drive wheels.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
16.9 - 24	TL	12	149A8	IND	445	1300	584	3877	DW 15 L	DW 14 L	40	2.60	
												3250	
Ø 26"	18.4 - 26	TL	12	156A8	IND	480	1425	637	4215	DW 16 L	DW 15 L	40	2.50
													4000
Ø 28"	16.9 - 28	TL	12	152A8	IND	450	1405	636	4190	DW 15 L	DW 14 L	40	2.60
													3550

Performance



Traction



IND: Industrial



EM 937 (L)



EM 937 (E-3/L-3) has been specially designed for loaders and backhoe loaders in dig and load applications, depending on the size. It features excellent durability and provides cut and chip resistance.


Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar		
												4.75	7.00	
14.00 - 24	TT	20	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	4.75	7.00
												50	4625	-
												10	-	8500
14.00 - 24	TL	20	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	4.75	7.00
												50	4625	-
												10	-	8500
14.00 - 24	TT	24	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	5.75	8.50
												50	5150	-
												10	-	9500
14.00 - 24	TL	24	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	5.75	8.50
												50	5150	-
												10	-	9500
14.00 - 24	TT	28	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	6.50	9.25
												50	5600	-
												10	-	10000
14.00 - 24	TL	28	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	6.50	9.25
												50	5600	-
												10	-	10000
14.00 - 24	TT	32	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	7.25	10.00
												50	6030	-
												10	-	10470
14.00 - 24	TL	32	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	7.25	10.00
												50	6030	-
												10	-	10470

STD: Standard

Performance



EM 937 (L)

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.			
												km/h / bar	2.75	4.25
14.00 - 25	TT	12	-	STD	390	1368	620	4105	10.00/1.5	-		50	3350	-
												10	-	6300
												km/h / bar	4.75	7.00
14.00 - 25	TT	20	-	STD	375	1368	620	4105	10.00/1.5	-		40	4765	-
												10	-	8500
												km/h / bar	4.75	7.00
14.00 - 25	TL	20	-	STD	375	1368	620	4105	10.00/1.5	-		50	4625	-
												10	-	8500
												km/h / bar	4.75	7.00
14.00 - 25	TT	20	-	AB	375	1368	620	4105	10.00/1.5	-		50	4625	-
												10	-	8500
												km/h / bar	4.75	7.00
14.00 - 25	TT	20	-	A+SB	375	1368	620	4105	10.00/1.5	-		40	4765	-
												10	-	8500
												km/h / bar	4.75	7.00
14.00 - 25	TT	20	-	SB	375	1368	620	4105	10.00/1.5	-		40	4765	-
												10	-	8500
												km/h / bar	4.75	7.00
14.00 - 25	TT	24	-	STD	375	1368	620	4105	10.00/1.5	-		50	5150	-
												10	-	9500
												km/h / bar	5.75	8.50
14.00 - 25	TL	24	-	STD	375	1368	620	4105	10.00/1.5	-		50	5150	-
												10	-	9500
												km/h / bar	5.75	8.50

STD: Standard - A + SB: Aramid + Steel Belted - AB: Aramid Belted - SB: Steel Belted

Performance



XL GRIP



XL GRIP has been specially designed for backhoe loaders that are employed in heavy-duty operations in excavation, dozing and loading applications. The non-directional tread pattern provides best traction and stability. The special tread compound results in excellent cut and chip resistance and an extended tread life.

Ø 16"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)			
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	5.75		
															260	910
9.00 - 16	TT	12	132 A6	-	-	STD	260	910	-	-	6.50 H	6.00 G	30	2000		
													km/h / bar	7.25		
9.00 - 16	TT	16	137 A6	-	-	STD	260	910	-	-	6.50 H	6.00 G	30	2300		
													km/h / bar	7.25		
Ø 18"	12.5/80 - 18	TT	12	-	-	142 A8	STD	305	980	-	-	W 9	11	km/h / bar	3.70	
														10 FR	3710	
														25 FR	3155	
														30 FR	2970	
														40 FR	2650	
	12.5/80 - 18	TL	12	-	-	142 A8	STD	305	980	-	-	W 9	11	km/h / bar	3.70	
														10 FR	3710	
														25 FR	3155	
														30 FR	2970	
														40 FR	2650	
	12.5/80 - 18	TL	16	-	-	148 A8	STD	305	980	-	-	W 9	11	km/h / bar	4.90	
														10 FR	4410	
														25 FR	3750	
Ø 20"	10.00 - 20	TT	18	-	-	-	AB	285	1075	505	3257	7.5	7.0	km/h / bar	8.30	
														10	4480	7.60
														40	-	3305
	10.00 - 20	TT	18	-	-	-	A + SB	285	1075	505	3257	7.5	7.0	km/h / bar	8.30	
														10	4480	7.60
														40	-	3305
	10.00 - 20	TT	18	-	-	-	IND	285	1075	505	3257	7.5	7.0	km/h / bar	8.30	
														10	4480	7.60
														40	-	3305

Performance



IND: Industrial - A + SB: Aramid + Steel Belted - AB: Aramid Belted



XL GRIP

Ø 20"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)							
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar							
10.00 - 20	TT	18	-	-	-	SB	285	1075	505	3257	7.5	7.0	8.30	4480	7.60	-	3305				
																		10			
																		40			
12.00 - 20	TT	20	-	-	-	IND	320	1155	545	3465	8.5	8.0	8.60	5680	7.90	-	4190				
																		10			
																		40			
Ø 24"	12.00 - 24	TT	20	-	-	-	IND	320	1250	585	3710	8.5	8.0	8.25	6900	8.25	-	4830			
																			10		
																			40		
14.9 - 24	TT	12	145 A8	-	-	IND	380	1240	575	3646	DW 13	DW 11 ; DW 12 ; DW 13L	2.90	2900	2.90	-	-				
																		40			
																		40			
Ø 28"	16.9-28	TT	12	152 A8	-	-	IND	450	1400	640	4175	DW 15L	DW 14L	2.60	3550	2.60	-	-			
																			40		
																			40		

Performance



Cut
Resistance



Stability



Durability

IND: Industrial - SB: Steel Belted





COMPACT LOADER



MULTIMAX MP 522



MULTIMAX MP 522 is the BKT multi-purpose tire developed for agro-industrial applications. It is suitable for all lifting and loading operations on vehicles such as telehandlers and compact loaders. Stability and traction are its strengths as well as outstanding puncture resistance. Thanks to its special compound, MULTIMAX MP 522 has an incredible cut and chip resistance.

MULTIMAX
RADIAL MPT TIRES

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)									
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
280/80 R 18 IND	TL	-	132 A8/B	STD	282	907	421	2748	W 9; 9; 9 SDC	W 8; W 10	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	960	1140	1300	1480	1660	1780	2000	-	-	
											40	960	1140	1300	1480	1660	1780	2000	-	-	
											30	1030	1220	1395	1585	1780	1905	2140	-	-	
											25	1070	1270	1445	1645	1845	1980	2220	-	-	
											10 Cyc.	1170	1440	1695	1950	2220	2415	2730	2880	3000	
Static	1795	2210	2600	2990	3405	3705	4190	4420	4600												
340/80 R 18 IND (12.5/80 R 18)	TL	-	143 A8/B	STD	343	1006	458	3023	11; 11 SDC; W 11	W 10; 12; 12 SDC	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1310	1555	1775	2020	2265	2430	2725	-	-	
											40	1310	1555	1775	2020	2265	2430	2725	-	-	
											30	1405	1665	1900	2165	2425	2600	2920	-	-	
											25	1455	1725	1970	2240	2515	2695	3025	-	-	
											10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090	
Static	2450	3010	3545	4080	4640	5050	5710	6020	6270												
Ø 20"	340/80 R 20 IND	TL	-	144 A8/B	STD	343	1052	481	3212	11	W 10; 11 SDC; W 11; 12; 12 SDC	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
												50	1345	1600	1820	2075	2325	2495	2800	-	-
												40	1345	1600	1820	2075	2325	2495	2800	-	-
												30	1440	1710	1950	2220	2490	2670	3000	-	-
												25	1495	1775	2025	2305	2585	2770	3110	-	-
												10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200
Static	2515	3095	3640	4190	4770	5185	5865	6185	6440												
380/75 R 20 IND (14.5 R 20)	TL	-	148 A8/B	STD	384	1074	483	3251	W 12	W 11; 11; 12	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	4.2	4.4
											50	1500	1770	2040	2305	2575	2860	3005	3150	-	-
											40	1500	1770	2040	2305	2575	2860	3005	3150	-	-
											30	1610	1900	2195	2490	2780	3075	3220	3370	-	-
											25	1670	1975	2280	2585	2890	3195	3350	3500	-	-
											10 Cyc.	1850	2260	2670	3080	3490	3900	4110	4315	4520	4730
Static	2840	3470	4100	4730	5360	5990	6305	6620	6935	7250											
400/70 R 20 IND (16.0/70 R 20)	TL	-	149 A8/B	STD	404	1068	476	3199	13	12 SDC; 13 SDC; 14	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1560	1855	2115	2405	2700	2895	3250	-	-	
											40	1560	1855	2115	2405	2700	2895	3250	-	-	
											30	1675	1985	2265	2580	2890	3100	3480	-	-	
											25	1735	2060	2350	2675	3000	3215	3610	-	-	
											10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875	
Static	2920	3590	4225	4860	5535	6020	6805	7180	7475												

STD: Standard


Technology



Performance



MULTIMAX MP 522


Ø 26"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)																				
										Rec.	Alt.	km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6										
												50	40	30	25	10 Cyc.	Static	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.2	4.4
480/80 R 26 IND	TL	-	160 A8/B	STD	479	1428	638	4287	DW 15 L	DW 16 L	km/h / bar	50	40	30	25	10 Cyc.	Static	2610	3060	3330	3555	3780	4005	4275	4500	-	-					
											2610	3060	3330	3555	3780	4005	4275	4500	-	-												
											2795	3275	3565	3805	4045	4290	4575	4815	-	-												
											2900	3400	3700	3950	4200	4450	4750	4995	-	-												
											3175	3915	4255	4590	4995	5335	5670	6075	6415	6750												
											4865	6005	6525	7040	7660	8180	8695	9315	9835	10350												
											2575	2815	3055	3295	3540	3780	4020	4260	4500	4740	4975	5215	5450	-	-							
480/80 R 26 IND	TL	-	167 A8/B	STD	479	1428	638	4287	DW 15 L	DW 16 L	km/h / bar	50	40	30	25	10 Cyc.	Static	2575	2815	3055	3295	3540	3780	4020	4260	4500	4740	4975	5215	5450	-	-
											2575	2815	3055	3295	3540	3780	4020	4260	4500	4740	4975	5215	5450	-	-							
											2790	3045	3300	3550	3805	4060	4315	4565	4820	5075	5330	5580	5835	-	-							
											2890	3155	3420	3680	3945	4210	4475	4735	5000	5265	5525	5790	6050	-	-							
											3200	3555	3910	4265	4620	4975	5330	5685	6040	6395	6750	7105	7460	7815	-	-						
											4900	5445	5990	6535	7080	7625	8170	8715	9260	9805	10350	10895	11445	11990	12535							
											2300	2725	2940	3150	3360	3575	3790	4000	-	-												
440/80 R 28 IND	TL	-	156 A8/B	STD	441	1415	643	4278	DW 14 L	DW 13 ; DW 13 L ; DW 15 L	km/h / bar	50	40	30	25	10 Cyc.	Static	2300	2725	2940	3150	3360	3575	3790	4000	-	-					
											2300	2725	2940	3150	3360	3575	3790	4000	-	-												
											2480	2930	3155	3380	3605	3830	4055	4280	-	-												
											2570	3040	3270	3505	3740	3970	4205	4440	-	-												
											2840	3470	3790	4105	4420	4735	5050	5370	5685	6000												
											4360	5330	5810	6295	6780	7265	7750	8230	8715	9200												
											2300	2725	2940	3150	3360	3575	3790	4000	-	-												

STD: Standard

Technology



Performance

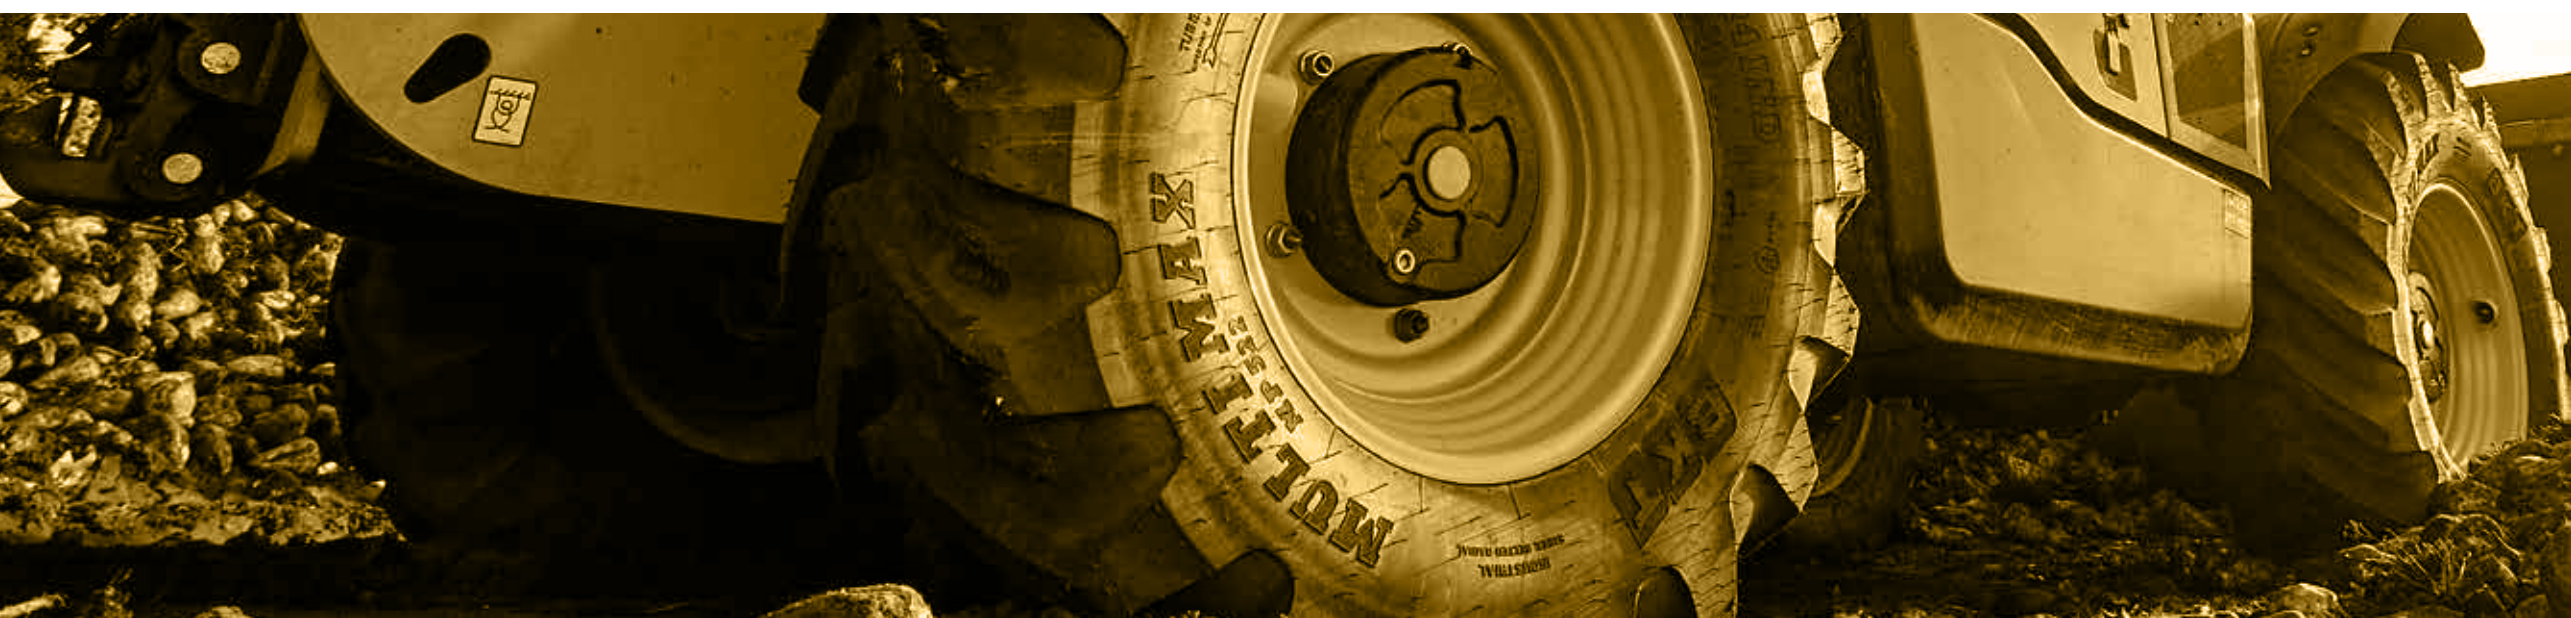

MULTIMAX MP 527



MULTIMAX MP 527 is a multi-purpose radial tire designed for telehandlers and compact loaders in agro-industrial applications. The tire shows a block pattern design providing excellent traction even on the harder surfaces. The strong sidewall ensures outstanding stability in lift mode. MULTIMAX MP 527 is made of a special cut-and-chipresistant compound providing and a long service life.

MULTIMAX
RADIAL MPT TIRES

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)									
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
340/80 R 18 IND	TL	.	143 A8/B	STD	343	1001	455	3028	11; 11 SDC; W 11	W 10; 12; 12 SDC	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1310	1555	1775	2020	2265	2430	2725	-	-	
											40	1310	1555	1775	2020	2265	2430	2725	-	-	
											30	1405	1665	1900	2165	2425	2600	2920	-	-	
											25	1455	1725	1970	2240	2515	2695	3025	-	-	
											10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090	
Static	2450	3010	3545	4080	4640	5050	5710	6020	6270												
360/70 R 18 IND	TL	.	142 A8/B	STD	360	969	439	2887	11	W 10; 11 SDC; W 11; 12; 12 SDC	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1275	1515	1725	1965	2200	2360	2650	-	-	
											40	1275	1515	1725	1965	2200	2360	2650	-	-	
											30	1365	1620	1850	2105	2360	2530	2840	-	-	
											25	1415	1680	1915	2180	2445	2625	2945	-	-	
											10 Cyc.	1555	1910	2250	2585	2945	3200	3620	3820	3975	
Static	2380	2930	3445	3965	4515	4910	5550	5855	6095												
Ø 20"	340/80 R 20 IND	TL	-	144 A8/B	STD	343	1052	483	3176	11	W 10; 11 SDC; W 11; 12; 12 SDC	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
												50	1345	1600	1820	2075	2325	2495	2800	-	-
												40	1345	1600	1820	2075	2325	2495	2800	-	-
												30	1440	1710	1950	2220	2490	2670	3000	-	-
												25	1495	1775	2025	2305	2585	2770	3110	-	-
												10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200
Static	2515	3095	3640	4190	4770	5185	5865	6185	6440												
400/70 R 20 IND (16.0/70 R 20)	TL	-	149 A8/B	STD	404	1068	494	3282	13	12 SDC; 13 SDC; 14	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1560	1855	2115	2405	2700	2895	3250	-	-	
											40	1560	1855	2115	2405	2700	2895	3250	-	-	
											30	1675	1985	2265	2580	2890	3100	3480	-	-	
											25	1735	2060	2350	2675	3000	3215	3610	-	-	
											10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875	
Static	2920	3590	4225	4860	5535	6020	6805	7180	7475												
Ø 24"	400/70 R 24 IND	TL	-	152 A8/B	STD	404	1170	542	3597	13	DW 12; DW 13; DW 13 L; 13 SDC; DW 14 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
												50	1705	2025	2310	2630	2950	3160	3550	-	-
												40	1705	2025	2310	2630	2950	3160	3550	-	-
												30	1825	2170	2470	2815	3155	3385	3800	-	-
												25	1895	2250	2565	2920	3275	3515	3945	-	-
												10 Cyc.	2080	2560	3010	3465	3945	4290	4850	5115	5325
Static	3185	3920	4615	5310	6045	6575	7435	7840	8165												

STD: Standard

Technologies



Performance



Technologies



Block Pattern

Performance



Stability



Traction



High Load Capacity



Cut and Chip Resistance



Hard Surfaces

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)																				
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4						
												50	40	30	25	10 Cyc.	Static	50	40	30	25	10 Cyc.	Static	50	40	30	25	10 Cyc.	Static	50	40	30
400/80 R 24 IND	TL	-	162 A8/B	STD	404	1250	578	3834	DW 13	DW 12; DW 13 L; DW 14 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4							
											50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-							
											40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-							
											30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-							
											25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-							
											10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125							
											Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925							
											km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4												
											50	2220	2640	3010	3425	3840	4120	4625	-	-												
											40	2220	2640	3010	3425	3840	4120	4625	-	-												
											30	2380	2825	3220	3665	4110	4410	4950	-	-												
											25	2465	2930	3340	3800	4265	4575	5135	-	-												
											10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940												
											Static	4150	5110	6015	6920	7875	8570	9685	10215	10640												
											440/80 R 24 IND	TL	-	161 A8/B	STD	441	1314	601	3985	DW 14 L	DW 13; DW 13 L; DW 15 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
50	2100	2495	2845	3240	3635	3895	4375	-	-																							
40	2100	2495	2845	3240	3635	3895	4375	-	-																							
30	2250	2675	3050	3470	3890	4170	4685	-	-																							
25	2335	2775	3160	3600	4035	4330	4860	-	-																							
10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565																							
Static	3930	4835	5690	6545	7450	8105	9160	9665	10065																							
km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																							
50	2400	2850	3250	3700	4150	4450	5000	-	-																							
40	2400	2850	3250	3700	4150	4450	5000	-	-																							
30	2570	3050	3480	3960	4445	4765	5350	-	-																							
25	2665	3165	3610	4110	4610	4940	5550	-	-																							
10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500																							
Static	4485	5520	6500	7475	8510	9260	10465	11040	11500																							
Ø 26"	480/80 R 26 IND	TL	-	160 A8/B	STD	479	1428	642	4259	DW 15 L												DW 16 L	km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.2	3.2	3.4
											50	2610	3060	3330	3555	3780	4005	4275	4500	-	-											
											40	2610	3060	3330	3555	3780	4005	4275	4500	-	-											
											30	2795	3275	3565	3805	4045	4290	4575	4815	-	-											
											25	2900	3400	3700	3950	4200	4450	4750	4995	-	-											
											10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750											
											Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350											
											km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.2	3.2	3.4	3.6											
											50	2300	2725	2940	3150	3360	3575	3790	4000	-	-											
											40	2300	2725	2940	3150	3360	3575	3790	4000	-	-											
											30	2480	2930	3155	3380	3605	3830	4055	4280	-	-											
											25	2570	3040	3270	3505	3740	3970	4205	4440	-	-											
											10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000											
											Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200											
											Ø 28"	440/80 R 28 IND	TL	-	156 A8/B	STD	441	1415	648	4270	DW 14 L		DW 13; DW 13 L; DW 15 L	km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.2	3.2
50	2610	3060	3330	3555	3780	4005	4275	4500	-	-																						
40	2610	3060	3330	3555	3780	4005	4275	4500	-	-																						
30	2795	3275	3565	3805	4045	4290	4575	4815	-	-																						
25	2900	3400	3700	3950	4200	4450	4750	4995	-	-																						
10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750																						
Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350																						
km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.2	3.2	3.4	3.6																						
50	2300	2725	2940	3150	3360	3575	3790	4000	-	-																						
40	2300	2725	2940	3150	3360	3575	3790	4000	-	-																						
30	2480	2930	3155	3380	3605	3830	4055	4280	-	-																						
25	2570	3040	3270	3505	3740	3970	4205	4440	-	-																						
10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000																						
Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200																						

STD: Standard

RT 747 AGRO INDUSTRIAL



RT 747 AGRO INDUSTRIAL is a radial agro-industrial tire suitable for compact loaders and telehandlers. Its extra wide lugs provide excellent traction and great stability in lifting operations. It has been designed with a special cut-and-chip resistance compound that enables the tire to carry heavy loads. RT 747 AGRO INDUSTRIAL is the right answer to all general farming operations that need outstanding versatility.

Ø 16"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)							
										Rec.	Alt.	km/h / bar	1.2	1.6	2.0	2.2	2.4	2.6	
												10	30	40	1265	1530	1790	1920	2055
11L R 16	TL	-	122 A8/B	STD	290	850	371	2497	W 8	W 10 L	10	30	40	1265	1530	1790	1920	2055	2200
											10 Cyc	2505	3090	3620	4205	4740	5325		
											Static	3505	4325	5070	5890	6635	7455		

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	DW	DW L	Load capacity (kg/tire)										
												km/h / bar	1.2	1.6	2.0	2.4	2.8	3.2				
												50	40	30	25	10 Cyc	Static	1670	2060	2415	2805	3160
460/70 R 24 (17.5L R 24)	TL	-	152 A8/B	STD	465	1254	556	3840	DW 15 L	DW 14 L; DW 16 L	50	40	30	25	10 Cyc	Static	1670	2060	2415	2805	3160	3550
											1785	2205	2585	3000	3380	3800						
											1850	2285	2680	3115	3505	3940						

460/70 R 24 (17.5L R 24)	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	DW	DW L	Load capacity (kg/tire)													
											km/h / bar	1.2	1.6	2.0	2.4	2.8	3.2	3.5	4.0					
											50	40	30	25	10 Cyc	Static	1535	1890	2245	2560	2915	3265	3505	4000
460/70 R 24 (17.5L R 24)	TL	-	159 A8/ 156 B	STD	465	1254	556	3840	DW 15 L	DW 14 L; DW 16 L	50	40	30	25	10 Cyc <td>Static</td> <td>1705</td> <td>2100</td> <td>2495</td> <td>2845</td> <td>3240</td> <td>3630</td> <td>3895</td> <td>4375</td>	Static	1705	2100	2495	2845	3240	3630	3895	4375
											1775	2185	2595	2960	3370	3775	4050	4550						
											1805	2225	2645	3015	3435	3850	4130	4640						

500/70 R 24 (19.5L R 24)	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	DW	DW L	Load capacity (kg/tire)												
											km/h / bar	1.2	1.6	2.0	2.4	2.8	3.0						
											50	40	30	25	10 Cyc	Static	1765	2175	2550	2965	3340	3750	
500/70 R 24 (19.5L R 24)	TL	-	157 A8/ 154 B	STD	485	1320	585	3949	DW 16 L	DW 15 L; DW 18 L	50	40	30	25	10 Cyc <td>Static</td> <td>1940</td> <td>2395</td> <td>2805</td> <td>3260</td> <td>3670</td> <td>4125</td> <td>4615</td>	Static	1940	2395	2805	3260	3670	4125	4615
											2075	2560	3000	3490	3930	4415							
											2155	2655	3115	3620	4075	4580							

STD: Standard

Technology



Special Compound



More Lugs

Performance



Stability



Traction



High Load Capacity



Cut and Chip Resistance



AT 603



AT 603 is a bias agro-industrial tire for implement machinery and backhoe loaders. AT 603 has been engineered to ensure great durability and traction on drive wheels providing best performance on every surface as well as excellent self-cleaning properties. The AT 603 "special" version has a reinforced casing, while the "HD" version offers improved cut and chip resistance.

Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	3.70
10.5/80 - 18	TL	10	119A8	131A8	STD	274	907	422	2727	W 9	W 8,9	km/h / bar	3.70	
												10 FR	2730	
												25 FR	2320	
												30 FR	2185	
												40 FR	1950	
												10 DW	1905	
												25 DW	1620	
												30 DW	1525	
40 DW	1360													
10.5/80 - 18	TL	10	119A8	131A8	HD	274	907	422	2727	W 9	W 8,9	km/h / bar	3.70	
												10 FR	2730	
												25 FR	2320	
												30 FR	2185	
												40 FR	1950	
												10 DW	1905	
												25 DW	1620	
												30 DW	1525	
40 DW	1360													
10.5/80 - 18	TL	10	119A8	131A8	SPL	274	907	422	2727	W 9	W 8,9	km/h / bar	3.70	
												10 FR	2730	
												25 FR	2320	
												30 FR	2185	
												40 FR	1950	
												10 DW	1905	
												25 DW	1620	
												30 DW	1525	
40 DW	1360													
12.5/80 - 18	TL	12	129A8	142A8	STD	308	1000	448	3027	W 9	11	km/h / bar	3.70	
												10 FR	3710	
												25 FR	3155	
												30 FR	2970	
												40 FR	2650	
												10 DW	2590	
												25 DW	2200	
												30 DW	2070	
40 DW	1850													

Technology



Performance



STD: Standard - HD: Heavy duty - SPL: Special



AT 603

Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)			
				Drive Wheel	Free Rolling						Rec.	Alt.		km/h / bar	Load capacity (kg/tire)		
															2.50	4.00	2.50
12.5/80 - 18	TL	16	135 A8	148 A8	STD	308	1000	448	3027	W 9	11		km/h / bar	4.90			
													10 FR	4410			
													25 FR	3750			
													30 FR	3530			
													40 FR	3150			
													10 DW	3050			
													25 DW	2595			
													30 DW	2440			
40 DW	2180																
12.5/80 - 18	TL	18	138 A8	150 A8	STD	308	1000	448	3027	W 9	11		km/h / bar	5.50			
													10 FR	4690			
													25 FR	3985			
													30 FR	3750			
													40 FR	3350			
													10 DW	3305			
													25 DW	2810			
													30 DW	2645			
40 DW	2360																
12.5/80 - 18	TL	12	129 A8	142 A8	SPL	308	1000	448	3027	W 9	11		km/h / bar	3.70			
													10 FR	3710			
													25 FR	3155			
													30 FR	2970			
													40 FR	2650			
													10 DW	2590			
													25 DW	2200			
													30 DW	2070			
40 DW	1850																
Ø 25"	15.5 - 25	TL	12	-	-	STD	410	1265	577	3861	12.00/1.3	12.00/1.3 (DC)		km/h / bar	2.50	4.00	2.50
														50	3250	-	-
														10	-	5600	-
														40	-	-	2650

- Technology**
-  **Heavy Duty**
-  **Reinforced Carcass**
- Performance**
-  **Durability**
-  **Traction**
-  **Self-Cleaning**
-  **Cut and Chip Resistance**

STD: Standard - SPL: Special



AT 621



AT 621 is suitable for backhoe loaders and compact loaders in all digging and loading operations in agriculture. The AT 621 tire features an extra deep tread which ensures great cut and chip resistance and higher durability. In addition, this BKT tire ensures great durability and self cleaning properties. AT 621 is available in several versions to meet the most differing user requirements.

Ø 15"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar		
33 X 12.5 - 15	TT	8	-	-	-	STD	318	851	394	2507	10.00 F SDC	-	10	3.25	2130	
													30	5.25	1750	
Ø 15.3"	10.0/75 - 15.3	TL	10	127A6	-	-	STD	267	780	373	2385	9.0	-	10	4.4	2240
														30	7.25	2300
Ø 16"	12.5/70 - 16	TL	14	-	-	-	STD	315	855	385	2584	10 LB	-	10	2.60	1645
														30	4.4	2240
12.5/70 - 16	TT	14	-	-	-	STD	315	855	385	2584	10 LB	-	10	4.4	2240	
													30	7.25	2300	
12.5/70 - 16	TL	8	-	-	-	STD	315	855	385	2584	10 LB	-	10	2.60	1645	
													30	7.25	2300	
9.00 - 16	TT	16	137A6	-	-	IND	260	925	-	-	6.50 H	6.00 G	10	2.60	1645	
													30	7.25	2300	
Ø 18"	12.5/80 - 18	TL	12	-	129 A8	142 A8	STD	308	987	434	2916	W 9	11.0	10 FR	3.70	3710
														25 FR		3155
														30 FR		2970
														40 FR		2650
														10 DW		2590
														25 DW		2200
														30 DW		2070
														40 DW		1850

STD: Standard - IND: Industrial

Performance



Durability



Traction



Self-Cleaning



Cut and Chip Resistance

Ø 18"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
12.5/80 - 18	TT	12	-	129 A8	142 A8	STD	308	987	434	2916	W 9	11.0	km/h / bar	3.70	
													10 FR	3710	
													25 FR	3155	
													30 FR	2970	
													40 FR	2650	
													10 DW	2590	
													25 DW	2200	
													30 DW	2070	
40 DW	1850														
12.5/80 - 18	TL	12	-	129 A8	142 A8	SPL	308	987	434	2916	W 9	11.0	km/h / bar	3.70	
													10 FR	3710	
													25 FR	3155	
													30 FR	2970	
													40 FR	2650	
													10 DW	2590	
													25 DW	2200	
													30 DW	2070	
40 DW	1850														
12.5/80 - 18	TT	16	-	135 A8	148 A8	STD	308	987	434	2916	W 9	11.0	km/h / bar	4.90	
													10 FR	4410	
													25 FR	3750	
													30 FR	3530	
													40 FR	3150	
													10 DW	3050	
													25 DW	2595	
													30 DW	2440	
40 DW	2180														
12.5/80 - 18	TL	16	-	135 A8	148 A8	STD	308	987	434	2916	W 9	11.0	km/h / bar	4.90	
													10 FR	4410	
													25 FR	3750	
													30 FR	3530	
													40 FR	3150	
													10 DW	3050	
													25 DW	2595	
													30 DW	2440	
40 DW	2180														
12.5/80 - 18	TL	16	-	135 A8	148 A8	IND HD	308	987	434	2916	W 9	11.0	km/h / bar	4.90	
													10 FR	4410	
													25 FR	3750	
													30 FR	3530	
													40 FR	3150	
													10 DW	3050	
													25 DW	2595	
													30 DW	2440	
40 DW	2180														

Performance



Durability



Traction



Self-Cleaning



Cut and Chip Resistance

STD: Standard - SPL: Special - IND HD: Industrial Heavy Duty

AT 621

Ø 18"	Tire size	TYPE	PR	LI/SS	LI/SS			S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling	Version					Rec.	Alt.		
					km/h / bar	2.60									
Ø 18"	15.5/60 - 18	TL	10	139 A2	-	-	STD	394	940	428	2871	W 13	-	10	2430
	15.5/60 - 18	TL	12	141 A2	-	-	STD	394	940	428	2871	W 13	-	km/h / bar	3.00
														10	2575
15.5/70 - 18 (400/70 - 18)	TL	10	-	-	-	STD	400	1030	474	3111	W 13	-	km/h / bar	2.60	
													10	2700	
Ø 19.5"	385/65 D 19.5	TL	16	165 A2	-	-	STD	390	1020	478	3136	11.75	12.25	km/h / bar	6.90
														10	5150
														0 (STATIONARY)	6700
Ø 20"	12.5 - 20	TT	12	-	-	-	STD	325	1040	-	-	11.0	-	km/h / bar	3.50
														40 FR	3350
														40 DW	2300
17.5/65 - 20	TL	10	-	-	-	STD	450	1090	490	3294	W 14 L	-	km/h / bar	2.40	
													10	3195	
													400/70 - 20	TL	16
40	3250														
400/70 - 20	TL	16	152 B/ 168 A2	-	-	STD	405	1090	494	3271	13	12 SDC; 13 SDC; 14	km/h / bar	4.00	5.00
													50	3550	-
													10	-	5600
42 X 17 - 20	TT	10	-	-	-	STD	432	1073	480	3198	14.00 TG SDC	-	km/h / bar	3.00	
													10	3690	
Ø 24"	16.9 - 24	TL	12	149 A8	-	-	IND	450	1302	590	3906	DW 15 L	DW 14 L	km/h / bar	2.60
														40	3250

Performance



Durability



Traction



Self-Cleaning



Cut and Chip
Resistance

STD: Standard - IND: Industrial

AT 621

Ø 24"	Tire size	TYPE	PR	LI/SS	LI/SS			S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling	Version					Rec.	Alt.		
17.5L - 24	TL	8	139A8	-	-	STD	450	1255	558	3752	DW 15 L	DW 14 L	40	1.70	2430
													40	2.30	3450
19.5L - 24	TL	12	151A8	-	-	STD	482	1305	587	3936	DW 16 L	-	40	2.50	4000
													40	2.60	3550
18.4 - 26	TL	12	156A8	-	-	STD	480	1425	649	4288	DW 16 L	DW 15 L	40	2.60	3550
													40	2.90	3750
16.9 - 28	TT	12	152A8	-	-	IND	450	1410	639	4199	DW 15 L	DW 14 L	40	2.60	3550
													40	2.90	3750
16.9 - 28	TL	12	152A8	-	-	IND	450	1410	639	4199	DW 15 L	DW 14 L	40	2.60	3550
													40	2.90	3750
16.9 - 28	TL	14	154A8	-	-	IND	450	1410	639	4199	DW 15 L	DW 14 L	40	2.60	3550
													40	2.90	3750
16.9 - 30	TL	12	153A8	-	-	IND	450	1460	670	4398	DW 15 L	DW 14 L	40	2.60	3550
													40	2.90	3750

Performance



Durability



Traction



Self-Cleaning



Cut and Chip
Resistance

STD: Standard - IND: Industrial



AT 625



AT 625 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. Its extra deep tread ensures increased puncture resistance and durability. AT 625 features excellent traction and stability as well as improved cut and chip resistance.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
14.9 - 24	TL	12	145 A8	STD	400	1265	575	3800	DW 13	DW 11; DW 12; DW 13 L	km/h / bar	2.90	
											40	2900	
14.9 - 24	TT	12	145 A8	STD	400	1265	575	3800	DW 13	DW 11; DW 12; DW 13 L	km/h / bar	2.90	
											40	2900	
Ø 28"	16.9 - 28	TT	12	152 A8	IND	450	1415	645	4254	DW 15 L	DW 14 L	km/h / bar	2.60
												40	3550
16.9 - 28	TL	12	152 A8	IND	450	1415	645	4254	DW 15 L	DW 14 L	km/h / bar	2.60	
											40	3550	
16.9 - 28	TT	12	152 A8	SPL	450	1415	645	4254	DW 15 L	DW 14 L	km/h / bar	2.60	
											40	3550	

STD: Standard - IND: Industrial - SPL: Special

Technology



Extra Deep Tread

Performance



Cut and Chip Resistance



High Puncture Resistance



Stability



Traction



CON STAR



CON STAR is particularly suitable for compact loaders and telehandlers in agro-industrial, lifting and loading applications. It features great traction along with excellent vertical and horizontal stability. CON STAR has been made of a cut-and-chip-resistant compound contributing to an extended tire life-cycle.

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
Ø 18"	340/80 - 18 (12.5/80 - 18)	TL	-	143 A8	IND	350	1015	465	3040	11	12; 11 SDC; 12 SDC; W 10; W 11	km/h / bar	4.00
												40	2725
Ø 20"	340/80 - 20 (12.5/80 - 20)	TL	-	144 A8	IND	350	1065	491	3272	11	12; 11 SDC; 12 SDC; W 10; W 11	km/h / bar	4.00
												40	2800
Ø 20"	380/75 - 20 (14.5 - 20)	TL	-	148 A8	IND	385	1080	500	3273	W 12	W 11; 12 SDC; 12; W 13; 13 SDC; 13	km/h / bar	4.00
												40	3150
Ø 20"	400/70 - 20 (16.0/70 - 20)	TL	16	149 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14	km/h / bar	4.00
												40	3250
Ø 20"	400/70 - 20 (16.0/70 - 20)	TL	-	156 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14	km/h / bar	5.00
												40	4000
Ø 24"	400/70 - 24 (16.0/70 - 24)	TL	-	158 A8	IND	395	1175	544	3556	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L	km/h / bar	5.00
												40	4250
Ø 24"	400/80 - 24 (15.5/80 - 24)	TL	20	162 A8	IND	405	1250	570	3781	DW 13	DW 12; DW 13 L; DW 14 L	km/h / bar	5.00
												40	4750


IND: Industrial

Technology



Performance



Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
440/80 - 24 (17.0/80 - 24)	TL	22	168A8	IND	455	1315	610	3986	DW 14 L	DW 13 ; DW 13 L ; DW 15 L		40	5600	
												4.00	5.00	
460/70 - 24 (17.5L - 24)	TL	-	159A8	IND	460	1250	562	3784	DW 15 L	DW 14 L ; DW 16 L		40	4375	
												4.00	4.00	
500/70 - 24 (19.5L - 24)	TL	-	164A8	IND	505	1300	579	3926	DW 16 L	DW 15 L ; DW 18 L		40	5000	
												4.00	4.00	
Ø 26"	480/80 - 26 (18.4 - 26)	TL	-	160A8	IND	490	1410	643	4272	DW 15 L	DW 16 L		40	4500
													3.20	3.20
Ø 28"	440/80 - 28 (16.9 - 28)	TL	-	156A8	IND	450	1420	632	4299	DW 14 L	DW 13 ; DW 13 L ; DW 15 L		40	4000
													3.20	3.20

Technology



Performance



IND: Industrial



MP 570



MP 570 is an agro-industrial tire, which is suitable for excavators and backhoe loaders. This tire provides good traction and durability, as well as excellent self-cleaning properties in all operating conditions.

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar		
12.5 - 18	TL	12	-	STD	308	990	450	2950	11	12 SDC		3.50	2030	
												80	2180	
												50		
12.5 - 18	TL	10	-	STD	308	990	450	2950	11	12 SDC		3.00	1930	
												80	2000	
												50		
Ø 20	12.5 - 20	TL	10	-	STD	335	1050	480	3130	11	12 SDC		3.00	1850
													80	2065
													50	
12.5 - 20	TL	12	-	STD	335	1050	480	3130	11	12 SDC		3.50	2060	
												80	2300	
												50		
14.5 - 20	TL	12	-	STD	360	1116	505	3325	11	12 SDC		3.00	2430	
												65	2500	
												50		

Performance



Durability



Traction



Self-Cleaning



STD: Standard



MP 590



MP 590 is an agro-industrial tire suitable for loading operations with telehandlers and forklifts. This tire provides good traction and excellent stability as well as increased durability.

Ø 22.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
18 - 22.5 (445/65 - 22.5)	TL	16	-	-	STD	480	1190	530	3534	14.0	-		5.50	
													40 DW	4875
													30 DW	5450
18 - 22.5 (445/65 - 22.5)	TL	20	-	-	STD	480	1190	530	3534	14.0	-		7.50	
													40 DW	5800
													30 DW	6500

STD: Standard

Performance



Stability



Traction



Durability



MP 600



MP 600 is an agro-industrial tire, suitable for municipality/maintenance operations with telehandlers and implement machinery, providing a comfortable driving experience. This tire provides good traction and excellent self-cleaning properties along with an extended product life-cycle.

Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
Ø 18"	10.5 - 18	TL	10	-	-	STD	272	920	420	2740	9	9 SDC	km/h / bar	3.75
													40 DW	1950
													50 DW	1900
Ø 18"	12.5 - 18	TL	10	-	-	STD	308	990	450	2950	11	12 SDC	km/h / bar	3.00
													40 DW	2060
													50 DW	2000
Ø 18"	12.5 - 18	TL	12	-	-	STD	308	990	450	2950	11	12 SDC	km/h / bar	3.50
													40 DW	2300
													50 DW	2240
Ø 20"	400/70 - 20 (16.0/70 - 20)	TL	14	-	-	STD	405	1085	-	-	13 SDC	12	km/h / bar	4.00
													40 DW	3550
													50 DW	3250
Ø 24"	400/70 - 24 (16.0/70 - 24)	TL	14	-	-	STD	405	1185	545	3530	13 SDC	12	km/h / bar	3.50
													40 DW	3650
													50 DW	3550
Ø 24"	400/70 - 24 (16.0/70 - 24)	TL	10	-	-	STD	405	1185	545	3530	13 SDC	12	km/h / bar	2.50
													40 DW	2975
													50 DW	2900
Ø 24"	400/70 - 24 (16.0/70 - 24)	TL	18	158A8	-	STD	405	1185	545	3530	13 SDC	12	km/h / bar	4.50
													40 DW	4250
													50 DW	4125
Ø 24"	400/70 - 24 (16.0/70 - 24)	TL	14	-	-	SPL	405	1185	545	3530	13 SDC	12	km/h / bar	3.50
													40 DW	3650
													50 DW	3550

STD: Standard - SPL: Special

Performance



Durability



Traction



Self-Cleaning





Comfort

SNOW RIDE (A)



SNOW-RIDE is particularly suitable for municipality and maintenance applications in winter conditions with compact loaders and skid steers. It features excellent traction and is ideal for ice and snow operations. Its specially designed tread pattern eliminates slippage risks and ensures a longer tire life-cycle.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
12.5/70 - 16	TL	6	-	STD	315	850	385	2550	10 LB	-		10	2.00	
													1410	
12.5/70 - 16	TL	10	-	STD	315	850	385	2550	10 LB	-		10	3.20	
													1855	
Ø 16.5"	10 - 16.5	TL	10	-	STD	270	780	357	2340	8.25	-		10	5.20
														2135
10 - 16.5	TL	6	-	STD	270	780	357	2340	8.25	-		10	3.10	
													1590	
12 - 16.5	TL	6	-	STD	305	835	379	2505	9.75	-		10	2.80	
													1915	
12 - 16.5	TL	10	-	STD	305	835	379	2505	9.75	-		10	4.50	
													2540	
Ø 18"	15.5/60 - 18	TL	10	-	STD	395	938	425	2814	W 13	-		10	2.60
														2400
Ø 20"	17.5/65 - 20	TL	10	-	STD	445	1095	493	3285	W 14 L	-		10	2.40
														3195

STD: Standard

Technology



Performance



MULTIMAX MP 525



MULTIMAX MP 525 is an All-Steel multi-purpose radial tire designed for telehandlers, compact loaders, and graders in agro-industrial applications. The tire has been specifically developed to carry heavy loads at higher speeds both on and off the road. Indeed, the large non-directional tread design provides exceptional traction on any surface in addition to excellent self-cleaning properties. The strong sidewall ensures exceptional lateral stability in lift mode, making it the ideal choice for agricultural and material handling operations.

MULTIMAX MP 525 is made of a unique, cut- and-chip-resistant tread compound that stands for a longer tire service life thanks to its extraordinary resistance against any kinds of cuts and punctures.

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar	3.75	
													4.00	
Ø 18"	405/70 R 18 (15.5/70 R 18)	TL	-	146 J/ 141 B/ 153A2	STD	405	1025	462	3122	13	11;12	100	2800	3000
												50	2575	-
												10	3650	-
												km/h / bar		
Ø 20"	405/70 R 20 (16.0/70 R 20)	TL	-	152 J/ 168A2	STD	405	1076	482	3260	13	12;13 SDC	100	3550	-
												50	-	-
												10	5600	-
												km/h / bar		
Ø 24"	455/70 R 24	TL	-	154 G/ 154 B/ 165A2	STD	455	1250	571	3794	14	13;DW14L	90	3750	-
												50	-	3750
												10	-	5150
												km/h / bar		

Performance

Traction

Cut and Chip Resistance

Self-Cleaning

STD: Standard

LOADER





Radial

EARTHMAX SR 22



EARTHMAX SR 22 (G-2/L-2) is an All Steel radial tire specially designed for motor graders and loaders operating in extreme winter conditions on ice or snow. Operators will appreciate both excellent traction and stability provided by the large and non-directional tread design. Special tread compound suitable for cold climate. The full depth sipes on tread blocks give maximum traction on snow.

EARTHMAX
RADIAL OTR TIRES

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)														
										Rec.	Alt.	km/h / bar														
										2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	5.25	5.50							
14.00 R 24	TL	*	153 A8/ 175 A2	CRC	366	1370	625	4141	8.00 TG	9.00 GR; 10.00 VA	40	2240	2430	2650	2800	3000	3250	3350	3650	-	-					
											10	-	-	-	-	-	-	-	-	-	6700	6900				
Ø 25"	15.5 R 25	TL	*	146 A8/ 169 A2	CRC	385	1275	557	3841	12.00/1.3	-	40	1550	1750	2000	2180	2360	2575	2800	3000	-	-	-	-	-	
												10	-	-	-	-	-	-	-	-	-	5000	5150	5450	5600	5800
17.5 R 25	TL	*	153 A8/ 176 A2	CRC	452	1350	590	3950	14.00/1.5	-	-	40	1850	2120	2360	2650	2900	3075	3350	3650	-	-	-	-	-	
												10	-	-	-	-	-	-	-	-	-	6000	6150	6500	6700	7100
17.5 R 25	TL	**	167 B/ 182 A2	CRC	452	1350	590	3950	14.00/1.5	-	-	40	4375	4625	4750	5000	5150	5450	-	-	-	-	-	-		
												10	-	-	-	-	-	-	7300	7500	7750	8000	8250	8500		
20.5 R 25	TL	**	177 B/ 193 A2	CRC	525	1490	640	4315	17.00/2.0	17.00/1.7	-	40	5800	6150	6500	6700	6900	7300	-	-	-	-	-	-		
												10	-	-	-	-	-	-	9750	10000	10300	10900	11200	11500		
20.5 R 25	TL	*	161 A8/ 186 A2	CRC	525	1490	640	4315	17.00/2.0	17.00/1.7	-	40	2430	2800	3150	3450	3875	4125	4375	4625	-	-	-	-	-	
												10	-	-	-	-	-	-	-	-	8000	8250	8750	9000	9500	
23.5 R 25	TL	*	170 A8/ 195 A2	CRC	610	1614	709	4863	19.50/2.5	-	-	40	3150	3550	4000	4500	4875	5300	5600	6000	-	-	-	-	-	
												10	-	-	-	-	-	-	-	-	10300	10600	11200	11500	12150	
23.5 R 25	TL	**	185 B/ 201 A2	CRC	610	1614	709	4863	19.50/2.5	-	-	40	7500	7750	8250	8500	9000	9250	-	-	-	-	-	-		
												10	-	-	-	-	-	-	12500	12850	13200	13600	14000	14500		

STD: Standard - CRC: Cut Resistant Compound

Technologies



All Steel

Performance



Traction



Stability



Ice and Snow



Durability



LOADER

Radial

EARTHMAX SR 23



EARTHMAX SR 23 (G-2/L-2) is an All Steel radial tire specially designed for motor graders and loaders. It features superior forward and lateral traction as well as exceptional self-cleaning properties. The durable casing and the particularly cut-resistant tread provide a long service life.

EARTHMAX
RADIAL OTR TIRES

Ø 25"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)													
										Rec.	Alt.	km/h / bar													
										1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	4.00	4.25	4.50	4.75	5.00			
15.5 R 25	TL	*	146 A8/ 169 A2	CRC	383	1264	559	3756	12.00/1.3	-	40	1550	1750	2000	2180	2360	2575	2800	3000	-	-	-	-	-	
											10	-	-	-	-	-	-	-	-	5000	5150	5450	5600	5800	
											km/h / bar	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	4.00	4.25	4.50	4.75	5.00	
17.5 R 25	TL	*	153 A8/ 176 A2	CRC	448	1345	612	4108	14.00/1.5	-	40	1850	2120	2360	2650	2900	3075	3350	3650	-	-	-	-	-	
											10	-	-	-	-	-	-	-	-	6000	6150	6500	6700	7100	
											km/h / bar	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	4.00	4.25	4.50	4.75	5.00	
20.5 R 25	TL	*	161 A8/ 186 A2	CRC	535	1490	668	4489	17.00/2.0	-	40	2430	2800	3150	3450	3875	4125	4375	4625	-	-	-	-	-	
											10	-	-	-	-	-	-	-	-	8000	8250	8750	9000	9500	
											km/h / bar	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	4.00	4.25	4.50	4.75	5.00	

CRC: Cut Resistant Compound

Technologies



All Steel

Performance



Traction



Self-Cleaning



Durability



High Puncture Resistance



LOADER

Radial

EARTHMAX SR 25 PLUS



EARTHMAX SR 25 PLUS (G-2/L-2) is an All Steel radial tire, which has been specially designed for motor graders and loaders operating in the most severe road construction or mining applications. Its non-directional tread design offers excellent self-cleaning properties in addition to traction and stability off the road.

EARTHMAX
RADIAL OTR TIRES

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)										
										Rec.	Alt.	km/h / bar	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	5.25	5.50
14.00 R 24	TL	*	153 A8/ 175 A2	CRC	359	1372	626	4146	8.00 TG	9.00 GR	40	2240	2430	2650	2800	3000	3250	3350	3650	-	-	
											10	-	-	-	-	-	-	-	-	6700	6900	

CRC: Cut Resistant Compound

Technologies



All Steel

Performance



Traction



Self-Cleaning



Durability



Stability





Radial

EARTHMAX SR 31



EARTHMAX SR 31 is an All Steel radial tire specially designed for articulated dump trucks and wheel loaders. Its multiply steel belts provide extraordinary strength and stability, whilst the non-directional rigid block pattern stands for both excellent traction and maneuverability even on muddy ground. In addition to outstanding riding comfort, EARTHMAX SR 31 features a special tread compound which is particularly cut-and-heat resistant. The radial casing structure also provides reduced rolling resistance offering significant fuel savings.

EARTHMAX
RADIAL OTR TIRES

Ø 25"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)						
										Rec.	Alt.							
												km/h / bar	4.00	4.25	4.50	4.75	5.00	5.25
20.5 R 25	TL	***	177 B/ 186 A2	CRC	540	1480	663	4449	17.00/2.0	-		50	5800	6150	6500	6700	6900	7300
												10	8000	8250	8750	9000	9500	-
23.5 R 25	TL	***	185 B/ 195 A2	CRC	612	1607	711	4797	19.50/2.5	-		50	7500	7750	8250	8500	9000	9250
												10	10300	10600	11200	11500	12150	-
26.5 R 25	TL	***	193 B/ 202 A2	CRC	689	1742	766	5200	22.00/3.0	-		50	9500	9750	10300	10600	11200	11500
												10	12850	13200	14000	14500	15000	-
26.5 R 25	TL	**	209 A2	CRC	689	1742	766	5200	22.00/3.0	-		50	15500	16000	16500	17000	18000	18500
												10	15500	16000	16500	17000	18000	18500
29.5 R 25	TL	**	216 A2	CRC	765	1861	818	5555	25.00/3.5	-		50	19000	19500	20000	20600	21200	22400
												10	19000	19500	20000	20600	21200	22400
29.5 R 25	TL	***	200 B/ 208 A2	CRC	765	1861	818	5555	25.00/3.5	-		50	11500	11800	12500	12850	13600	14000
												10	15500	16000	17000	17500	18000	-

CRC: Cut Resistant Compound

Technologies



All Steel

Performance



Comfort



Traction



Cut Resistance



Stability



Durability



LOADER

Bias

GR 288



GR 288 (G-2/L-2) is a versatile bias-ply tire for graders or loaders. It is ideal for use in construction, site preparation, road building, and other soft or muddy environments. The self-cleaning tread pattern provides excellent traction, and you can expect a long tire life as a result of the special cut-and-chip-resistant compound.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.			
												km/h / bar	2.50	4.00
15.5 - 25	TL	12	-	STD	385	1270	572	3772	12.00/1.3	12.00/1.3 (DC)	40	2650	-	
											10	-	5600	
											km/h / bar	2.00	3.50	
17.5 - 25	TL	12	-	STD	445	1330	596	3950	14.00/1.5	14.00/1.5 (DC); 14.00/1.3 (DC)	40	2900	-	
											10	-	6150	
											km/h / bar	2.75	4.75	
17.5 - 25	TL	16	-	STD	445	1330	596	3950	14.00/1.5	14.00/1.3 (DC)	40	3350	-	
											10	-	7300	
											km/h / bar	3.25	5.75	
17.5 - 25	TT	20	-	DB HD	445	1330	596	3950	14.00/1.5	14.00/1.3 (DC)	40	3650	-	
											10	-	8250	
											km/h / bar	2.25	3.50	
20.5 - 25	TL	16	-	STD	520	1480	656	4396	17.00/2.0	17.00/1.7	40	4000	-	
											10	-	8250	
											km/h / bar	2.75	4.50	
20.5 - 25	TL	20	-	STD	520	1480	656	4396	17.00/2.0	17.00/1.7	40	4500	-	
											10	-	9500	
											km/h / bar	2.00	3.00	
23.5 - 25	TL	16	-	STD	595	1610	708	4782	19.50/2.5	-	40	4750	-	
											10	-	9500	
											km/h / bar	2.50	3.75	
23.5 - 25	TL	20	-	STD	595	1610	708	4782	19.50/2.5	-	40	5450	-	
											10	-	10900	

STD: Standard - DB HD: Dual Bead Heavy Duty

Performance



Traction



Stability



Self-Cleaning



Cut and Chip Resistance



LOADER

Bias

EM 936 LOADER SPECIAL



EM 936 LOADER SPECIAL has been specially designed for telehandlers in loading applications. It features outstanding riding comfort and enhanced self-cleaning properties. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.			
												km/h / bar	3.50	
	16.0/70 - 20 (405/70 - 20)	TL	14	149 B	STD	405	1090	480	3295	13 SDC	13		50	3250

STD: Standard

Technology



Special Compound

Performance



Comfort



Handling & Comfort



Heavy Duty



Self-Cleaning



Traction





Bias

EM 937 (L)



EM 937 (E-3/L-3) has been specially designed for loaders and backhoe loaders in dig and load applications, depending on the size. It features excellent durability and provides cut and chip resistance.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.			
												km/h / bar		
14.00 - 24	TT	20	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	4.75	7.00
												50	4625	-
												10	-	8500
14.00 - 24	TL	20	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	4.75	7.00
												50	4625	-
												10	-	8500
14.00 - 24	TT	24	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	5.75	8.50
												50	5150	-
												10	-	9500
14.00 - 24	TL	24	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	5.75	8.50
												50	5150	-
												10	-	9500
14.00 - 24	TT	28	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	6.50	9.25
												50	5600	-
												10	-	10000
14.00 - 24	TL	28	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	6.50	9.25
												50	5600	-
												10	-	10000
14.00 - 24	TT	32	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	7.25	10.00
												50	6030	-
												10	-	10470
14.00 - 24	TL	32	-	STD	375	1368	628	4050	10.00 W	-		km/h / bar	7.25	10.00
												50	6030	-
												10	-	10470

STD: Standard

Performance





EM 937 (L)

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.			
												km/h / bar	2.75	4.25
14.00 - 25	TT	12	-	STD	390	1368	620	4105	10.00/1.5	-		50	3350	-
												10	-	6300
												km/h / bar	4.75	7.00
14.00 - 25	TT	20	-	STD	375	1368	620	4105	10.00/1.5	-		50	4765	-
												10	-	8500
												km/h / bar	4.75	7.00
14.00 - 25	TL	20	-	STD	375	1368	620	4105	10.00/1.5	-		50	4625	-
												10	-	8500
												km/h / bar	4.75	7.00
14.00 - 25	TT	20	-	AB	375	1368	620	4105	10.00/1.5	-		50	4625	-
												10	-	8500
												km/h / bar	4.75	7.00
14.00 - 25	TT	20	-	A+SB	375	1368	620	4105	10.00/1.5	-		50	4765	-
												10	-	8500
												km/h / bar	4.75	7.00
14.00 - 25	TT	20	-	SB	375	1368	620	4105	10.00/1.5	-		50	4765	-
												10	-	8500
												km/h / bar	4.75	7.00
14.00 - 25	TT	24	-	STD	375	1368	620	4105	10.00/1.5	-		50	5150	-
												10	-	9500
												km/h / bar	5.75	8.50
14.00 - 25	TL	24	-	STD	375	1368	620	4105	10.00/1.5	-		50	5150	-
												10	-	9500
												km/h / bar	5.75	8.50

STD: Standard - A + SB: Aramid + Steel Belted - AB: Aramid Belted - SB: Steel Belted

Performance



Cut and Chip Resistance



Durability



Heavy Duty



LOADER

Bias

LOADER PLUS (L-3)



LOADER PLUS (L-3) is a bias-ply tire specially designed for loaders. The tread compound provides cut-and-chip-resistant properties and suites best for loading and dozing operations.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	7.00
													10	8500
14.00 - 25	TT	20	-	STD	375	1368	630	4050	10.00/1.5	-		km/h / bar	7.00	
												10	8500	
17.5 - 25	TT	16	-	STD	440	1345	622	3980	14.00/1.5	-		km/h / bar	4.75	
												10	7300	
17.5 - 25	TL	16	-	STD	440	1345	622	3980	14.00/1.5	-		km/h / bar	4.75	
												10	7300	
17.5 - 25	TT	20	-	DB	440	1345	622	3980	14.00/1.5	-		km/h / bar	5.75	
												10	8250	
20.5 - 25	TT	16	-	STD	540	1490	685	4410	17.00/2.0	-		km/h / bar	3.50	
												10	8250	
20.5 - 25	TL	16	-	STD	540	1490	685	4410	17.00/2.0	-		km/h / bar	3.50	
												10	8250	
20.5 - 25	TT	20	-	STD	540	1490	685	4410	17.00/2.0	-		km/h / bar	4.50	
												10	9500	
20.5 - 25	TL	20	-	STD	540	1490	685	4410	17.00/2.0	-		km/h / bar	4.50	
												10	9500	
23.5 - 25	TT	16	-	STD	610	1640	749	4855	19.50/2.5	-		km/h / bar	3.00	
												10	9500	
23.5 - 25	TL	16	-	STD	610	1640	749	4855	19.50/2.5	-		km/h / bar	3.00	
												10	9500	

Performance



Traction




Cut Resistance





LOADER

LOADER PLUS (L-3)

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
23.5 - 25	TL	20	-	STD	610	1640	749	4855	19.50/2.5	-	km/h / bar	3.75	
											10	10900	
23.5 - 25	TT	20	-	STD	610	1640	749	4855	19.50/2.5	-	km/h / bar	3.75	
											10	10900	
23.5 - 25	TL	24	-	STD	610	1640	749	4855	19.50/2.5	-	km/h / bar	3.75	
											10	12500	
26.5 - 25	TL	28	-	STD	680	1740	796	5150	22.00/3.0	-	km/h / bar	4.75	
											10	15500	
26.5 - 25	TL	32	-	STD	680	1740	796	5150	22.00/3.0	-	km/h / bar	5.50	
											10	17000	
29.5 - 25	TL	28	-	STD	760	1860	849	5544	25.00/3.5	-	km/h / bar	4.25	
											10	17500	
29.5 - 25	TL	32	-	STD	760	1860	849	5544	25.00/3.5	-	km/h / bar	5.00	
											10	19250	

Performance



Traction



Cut Resistance

STD: Standard





LOADER

Radial

BK-LOADER 53



BK-LOADER 53 is an aramid-belted tire designed for loaders in industrial applications. The unique tread design provides best lateral stability in addition to extended tread wear and extraordinary resistance against cuts and punctures thanks to the extra deep tread. BK-LOADER 53 features outstanding self-cleaning properties as well as excellent grip and traction on both wet and dry surfaces. This tire is particularly suitable for recycling operations.

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)									
										Rec.	Alt.	km/h / bar	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5
												20 TRANSPORT	10 LOADING	STATIC	20 TRANSPORT	10 LOADING	STATIC	20 TRANSPORT	10 LOADING	STATIC	20 TRANSPORT
365/70 R 18	TL	-	146A2/142A4	AB	360	990	458	3017	11	-	km/h / bar	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	
											20 TRANSPORT	930	1195	1405	1620	1855	2045	2255	2440	2650	
											10 LOADING	1050	1350	1590	1830	2100	2310	2550	2760	3000	
405/70 R 18	TL	-	153A2/149A4	AB	407	1045	-	-	13	14; 13 SDC; 12; 12 SDC	km/h / bar	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	
											20 TRANSPORT	1140	1465	1725	1985	2275	2505	2765	2990	3250	
											10 LOADING	1280	1645	1935	2230	2555	2815	3105	3360	3650	
405/70 R 20	TL	-	155A2/151A4	AB	407	1097	511	3339	13	14; 13 SDC; 12; 12 SDC	km/h / bar	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	
											20 TRANSPORT	1210	1520	1805	2090	2375	2640	2905	3170	3450	
											10 LOADING	1375	1725	2050	2375	2700	3000	3300	3600	3875	
												Static	2200	2750	3275	3800	4325	4800	5300	5750	6200

AB: Aramid Belted

Technology



Aramid Belted

Performance



Cut and Chip Resistance



High Puncture Resistance



Self-Cleaning



Traction





LOADER

Bias

ROCK GRIP



ROCK GRIP (L-4) is a bias-ply tire designed for wheel loader operations in severe loading service and on rough ground conditions. Its specially designed, cut-and-chip-resistant tread compound minimizes punctures thereby reducing machine downtime. The (L-4) tread depth provides an extended tire life-cycle.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
												km/h / bar	
14.00 - 25	TT	24	-	STD	375	1410	649	4173	10.00/1.5	-	10	8.50	9500
14.00 - 25	TL	24	-	STD	375	1410	649	4173	10.00/1.5	-	10	8.50	9500
14.00 - 25	TT	28	-	STD	375	1410	649	4173	10.00/1.5	-	10	9.25	10000
14.00 - 25	TL	28	-	STD	375	1410	649	4173	10.00/1.5	-	10	9.25	10000
14.00 - 25	TL	32	-	STD	375	1410	649	4173	10.00/1.5	-	10	10.00	10500

STD: Standard

Technologies



Deep Tread

Performance



Cut Resistance



Heavy Duty



High Puncture Resistance




Stability



XL GRIP



XL GRIP (E-3/L-3) is a wide-base bias-ply tire for loaders designed to minimize cuts and punctures in heavy-duty loading applications. It provides exceptional traction as well as an extended tire life.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.			
												km/h / bar		
16.0/70 - 20	TL	16	-	STD	405	1090	480	3295	13 SDC	-		4.00	5.15	
												50	3515	-
												10	-	5735
15.5 - 25	TL	12	-	STD	402	1285	573	3767	12.00/1.3	12.00/1.3 (DC)		2.50	4.00	
												50	3250	-
												10	-	5600
17.5 - 25	TL	12	-	STD	435	1345	622	3980	14.00/1.5	-		2.25	3.50	
												50	3650	-
												10	-	6150
17.5 - 25	TL	16	-	STD	435	1345	622	3980	14.00/1.5	-		3.00	4.75	
												50	4250	-
												10	-	7300
17.5 - 25	TL	20	-	STD	435	1345	622	3980	14.00/1.5	-		4.00	5.75	
												50	5000	-
												10	-	8250
17.5 - 25	TT	20	-	DB	435	1345	622	3980	14.00/1.5	-		4.00	5.75	
												50	5000	-
												10	-	8250
17.5 - 25	TL	20	-	DB	435	1345	622	3980	14.00/1.5	-		4.00	5.75	
												50	5000	-
												10	-	8250
17.5 - 25	TL	24	-	DB	435	1345	622	3980	14.00/1.5	-		5.75	7.00	
												50	6150	-
												10	-	10000

STD: Standard - DB: Dual Bead

Performance





LOADER

XL GRIP

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.			
												km/h / bar	2.00	2.50
20.5 - 25	TL	12	-	STD	530	1485	682	4395	17.00/2.0	-		50	4500	-
												10	-	6700
												km/h / bar	2.75	3.50
20.5 - 25	TL	16	-	STD	530	1485	682	4395	17.00/2.0	-		50	5450	-
												10	-	8250
												km/h / bar	3.25	4.50
20.5 - 25	TL	20	-	STD	530	1485	682	4395	17.00/2.0	-		50	6000	-
												10	-	9500
												km/h / bar	4.00	5.25
20.5 - 25	TL	24	-	STD	530	1485	682	4395	17.00/2.0	-		50	6700	-
												10	-	10300
												km/h / bar	2.25	3.00
23.5 - 25	TL	16	-	STD	600	1625	742	4810	19.50/2.5	-		50	6150	-
												10	-	9500
												km/h / bar	3.00	3.75
23.5 - 25	TL	20	-	STD	600	1625	742	4810	19.50/2.5	-		50	7300	-
												10	-	10900
												km/h / bar	3.50	4.75
23.5 - 25	TL	24	-	STD	600	1625	742	4810	19.50/2.5	-		50	8000	-
												10	-	12500
												km/h / bar	3.50	4.75
23.5 - 25	TL	24	-	AB HD	600	1625	742	4810	19.50/2.5	-		50	8000	-
												10	-	12500
												km/h / bar	2.50	3.50
26.5 - 25	TL	20	-	STD	680	1740	796	5150	22.00/3.0	-		50	8250	-
												10	-	13200
												km/h / bar	4.75	
26.5 - 25	TL	28	-	STD	680	1740	796	5150	22.00/3.0	-		10	15500	

Performance



Traction



Stability



Durability



Cut Resistance



Heavy Duty

STD: Standard - AB HD: Aramid Belted HD





LOADER

XL GRIP

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
26.5 - 25	TL	32	-	STD	680	1740	796	5150	22.00/3.0	-		10	5.50	17000
												km/h / bar	4.25	
29.5 - 25	TL	28	-	STD	760	1860	849	5544	25.00/3.5	-		10	5.00	19250
												km/h / bar		
29.5 - 25	TL	32	-	STD	760	1860	849	5544	25.00/3.5	-		10		
												km/h / bar		

STD: Standard

Performance



Traction



Stability



Durability



Cut Resistance



Heavy Duty



SNOW RIDE (B)



SNOW-RIDE is particularly suitable for road applications in winter conditions with skid steers. It features excellent traction and is ideal for ice and snow operations. Its specially designed tread pattern eliminates slippage risks.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
										km/h / bar		2.60	
16.9 - 24	TL	12	-	STD	429	1310	590	3930	DW 15 L	DW 14 L	40	3250	
									km/h / bar		2.50		
18.4 - 24	TL	12	-	STD	475	1375	625	4089	DW 16 L	DW 15 L	40	3875	
									km/h / bar		4.00		
Ø 25"	15.5 - 25	TL	12	-	STD	395	1280	569	3818	12.00/1.3	-	10	5600
										km/h / bar		3.50	
	17.5 - 25	TL	12	-	STD	445	1348	608	4044	14.00/1.5	-	10	6150
km/h / bar										4.75			
17.5 - 25	TL	16	-	STD	445	1348	608	4044	14.00/1.5	-	10	7300	
									km/h / bar		3.50		
20.5 - 25	TL	16	-	STD	537	1492	652	4423	17.00/2.0	17.00/1.7	10	8250	
									km/h / bar		3.00		
23.5 - 25	TL	16	-	STD	612	1630	693	4800	19.50/2.5	-	10	9500	
									km/h / bar		3.00		

STD: Standard

Technologies



Snow Pattern

Performance



Cut and Chip Resistance



Durability



Heavy Duty



Ice and Snow



Stability



LOADER

Bias

SNOW RIDE PLUS



SNOW RIDE - PLUS is particularly suitable for road applications in winter conditions. It features excellent traction and is ideal for ice and snow operations. Its specially designed tread pattern eliminates slippage risks.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		Load capacity (kg/tire)	
						(mm)	(mm)	(mm)	(mm)	Rec.	Alt.	km/h / bar	
20.5 - 25	TL	16	-	STD	525	1485	656	4370	17.00/2.0	17.00/1.7	10	3.50	8250
23.5 - 25	TL	16	-	STD	600	1630	694	4765	19.50/2.5	-	10	3.00	9500

STD: Standard

Technologies



Performance





LOADER

Bias

ROCK STAR (L-4)



ROCK STAR LOADER has been specifically designed for cranes and loaders. In addition to excellent traction, the unique tread compound provides superior cut and chip resistance. ROCK STAR LOADER is a 24-ply-rated tire ensuring outstanding load capacity and extraordinary durability.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)	
										Rec.	Alt.		8.50	9500
14.00 - 24	TT	24	-	STD	390	1425	-	-	10.00 WA	10.00 VA	10	8.50	9500	

STD: Standard

Performance



Durability



High Load Capacity



Traction



Cut and Chip Resistance





COMPACTOR



PAC MASTER

PAC MASTER is a bias tire for compactors. It shows high stability and ensures an extended tire life-cycle. It is made of a special compound that provides particular heat resistance.



Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
190/60 - 15	TL	6	-	STD	186	610	291	1853	6.0	-	km/h / bar	2.80	
											10	750	
											15	600	
205/60 - 15	TL	6	-	STD	200	640	-	-	6.0 J	7.0 J	km/h / bar	3.25	
											10	1060	
											15	850	
7.50 - 15	TT	6	-	STD	225	790	-	-	6.0	6.5	km/h / bar	4.00	
											10	1850	
											15	1500	
7.50 - 15	TT	12	-	STD	225	790	-	-	6.0	6.5	km/h / bar	7.50	
											10	2650	
											15	2120	
7.50 - 15	TT	14	-	STD	225	790	-	-	6.0	6.5	km/h / bar	8.75	
											10	2900	
											15	2300	
8.5/90 - 15 K	TL	6	-	STD	230	785	-	-	6.0	5.50 F	km/h / bar	3.50	
											10	1800	
											15	1450	
9.5/65 - 15	TL	6	-	STD	235	675	-	-	7.0	-	km/h / bar	3.25	
											10	1320	
											15	1060	
9.5/65 - 15	TT	6	-	STD	235	675	-	-	7.0	-	km/h / bar	3.25	
											10	1320	
											15	1060	

STD: Standard

Technology



Special Compound

Performance



Durability



Heat Resistance



Stability



Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 16"	7.50 - 16	TT	14	-	STD	225	815	-	-	6.0	6.5		8.75	
													10	2900
													15	2300
	10.5/80 - 16	TL	6	-	STD	275	810	382	2480	8.0	-		4.50	
													10	1850
													15	1500
10.5/80 - 16	TL	14	-	STD	275	810	382	2480	8.0	-		6.00		
												10	2775	
												15	2250	
Ø 20"	9.00 - 20	TT	12	-	STD	275	1016	471	3107	7.0	7.5		6.25	
													10	4000
													15	3150
	9.00 - 20	TT	14	-	STD	275	1016	471	3107	7.0	7.5		7.25	
													10	4375
													15	3450
	9.00 - 20	TT	16	-	STD	275	1016	471	3107	7.0	7.5		8.25	
													10	4750
													15	3750
	11.00 - 20	TT	16	-	SPL	291	1070	494	3310	8.0	8.5		7.25	
													10	5450
													15	4375
	11.00 - 20	TT	18	-	SPL	291	1070	494	3310	8.0	8.5		8.25	
													10	5800
													15	4625
	14/70 - 20	TT	12	-	STD	380	975	-	-	11 TG	-		4.50	
													10	4000
													15	3150

SPL: Special; STD: Standard

Technology



Performance



 Bias



PAC MASTER PLUS



PAC MASTER PLUS is a bias tire for compactors. It features high stability and a wider contact area. It is made of a special compound providing high heat resistance. PAC MASTER PLUS ensures an extended tire life-cycle.

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
Ø 15"	7.50 - 15	TT	14	-	STD	225	790	375	2385	6.0	6.5	8.75	2900
												10	2300
												15	
Ø 20"	9.00 - 20	TT	10	-	STD	270	1005	-	-	7.0	7.5	5.25	3650
												10	2900
												15	
	9.00 - 20	TT	12	-	STD	270	1005	-	-	7.0	7.5	6.25	4000
												10	3150
												15	
	9.00 - 20	TT	14	-	STD	270	1005	-	-	7.0	7.5	7.25	4375
												10	3445
												15	

STD: Standard

Technology



Special Compound

Performance



Durability



Heat Resistance



Stability



TR 387



TR 387 is an agro-industrial tire suitable for sugar cane trailers and compactors. It features high load capacity and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations using trailers.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	2.40
	11.2 - 24	TL	8	116A6	STD	292	1075	496	3228	W 10	W 9	30	1250
Ø 26"	18.4 - 26	TL	10	142 A6	STD	485	1450	635	4150	DW 16 L	DW 15 L	30	2650
	18.4 - 26	TL	12	146 A6	STD	485	1450	635	4150	DW 16 L	DW 15 L	30	3000
	18.4 - 26	TL	16	152 A6	HD	485	1450	635	4150	DW 16 L	DW 15 L	30	3550
	23.1 - 26	TL	8	145 A6	STD	592	1560	690	4688	DW 20 B	-	30	2900
	23.1 - 26	TL	12	153 A6	STD	592	1560	690	4688	DW 20 B	-	30	3650
	23.1 - 26	TL	16	159 A6	STD	592	1560	690	4688	DW 20 B	-	30	4375
	23.1 - 26	TL	16	159 A6	DB	592	1560	690	4688	DW 20 B	-	30	4375
	23.1 - 26	TT	18	161 A6	DB HD	592	1560	690	4688	DW 20 B	-	30	4625

Performance



High Load Capacity



Durability

STD: Standard - HD: Heavy Duty - DB: Dual Bead - DB HD: Dual Bead Heavy Duty

Ø 26"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	2.60
												30	4625
Ø 26"	23.1 - 26	TL	18	161 A6	DB HD	592	1560	690	4688	DW 20 B	-	30	4625
	23.1 - 26	TL	12	164 A6	HD	592	1560	690	4688	DW 20 B	-	km/h / bar	1.70
												30	5000
23.1 - 26	TL	18	161 A6	HD DB SPL	592	1560	690	4688	DW 20 B	-	km/h / bar	2.60	
											30	4625	
Ø 28"	12.4 - 28	TL	8	123 A6	STD	325	1200	550	3576	W 11	W 9;W 10	km/h / bar	2.30
												30	1550
	16.9 - 28	TL	8	135 A6	STD	440	1400	630	4074	DW 15 L	DW 14 L	km/h / bar	1.70
30												2180	
Ø 30"	16.9 - 30 (14 - 30)	TL	8	137 A6	STD	440	1450	655	4220	DW 15 L	DW 14 L	km/h / bar	1.70
												30	2300
	18.4 - 30 (15 - 30)	TL	8	139 A6	STD	475	1530	677	4511	DW 16 L	DW 15 L	km/h / bar	1.40
30												2430	
18.4 - 30 (15 - 30)	TT	14	151 A6	HD	475	1530	680	4395	DW 16 L	DW 15 L	km/h / bar	2.60	
											30	3450	
620/75 - 30 (23.1 - 30)	TL	16	161 A6	DB	605	1675	770	4909	DW 20 A; DW 20 B	-	km/h / bar	2.30	
											30	4625	
620/75 - 30 (23.1 - 30)	TL	18	164 A6	DB HD	605	1675	-	-	DW 20 A; DW 20 B	-	km/h / bar	2.60	
											30	5000	

Performance




High Load Capacity



Durability

STD: Standard - DB HD: Dual Bead Heavy Duty - HD DB SPL: Heavy Duty Dual Bead Special - HD: Heavy Duty - DB: Dual Bead



Ø 32"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)
										Rec.	Alt.		
													
24.5 - 32	TL	16	164A6	DB HD	625	1755	790	5226	DH 21	DH 21 B; DH 21 H; DH 21 HB	30	5000	

DB HD: Dual Bead Heavy Duty

Performance



High Load Capacity



Durability



 Bias



TR 387 IND



TR 387 IND is an industrial tire suitable for industrial trailers and compactors. It features high load capacity and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations using trailers.

Ø 30"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
620/75 - 30 (23.1 - 30)	TL	16	161 A6	DB	605	1675	770	4909	DW 20 A; DW 20 B	-		30	2.30	
												30	4625	
620/75 - 30 (23.1 - 30)	TL	18	164 A6	DB HD	605	1675	-	-	DW 20 A; DW 20 B	-		30	2.60	
												30	5000	
Ø 32"	24.5 - 32	TL	16	164 A6	DB HD	625	1755	790	5226	DH 21	DH 21 B; DH 21 H; DH 21 HB		30	2.10
													30	5000

DB: Dual Bead - DB HD: Dual Bead Heavy Duty

Technologies



Reinforced Bead

Performance



Cut and Chip Resistance



Durability



Heavy Duty



High Load Capacity



TR 390

TR 390 is an agro-industrial tire suitable for sugar cane trailers and compactors. TR 390 features high load capacity and increased durability. Its "dual bead HD" version is particularly suitable for industrial tractors and transport operations using trailers, whereas its "dual bead HD special" version is ideal for heavy-duty service.



Ø 26"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
23.1 - 26	TL	8	145 A6	STD	595	1560	690	4545	DW 20 B	-		30	1.10
													2900
23.1 - 26	TL	12	153 A6	STD	595	1560	690	4545	DW 20 B	-		30	1.70
													3650
23.1 - 26	TL	16	159 A6	STD	595	1560	690	4545	DW 20 B	-		30	2.30
													4375
23.1 - 26	TL	18	161 A6	DB HD	595	1560	690	4545	DW 20 B	-		30	2.60
													4625
23.1 - 26	TL	18	161 A6	HD DB SPL	595	1560	690	4545	DW 20 B	-		30	2.60
													4625
28L - 26	TL	12	154 A6	STD	714	1560	690	4545	DW 25 B	DW 23 B		30	1.40
													3750
28L - 26	TL	16	160 A6	DB	714	1560	690	4545	DW 25 B	DW 23 B		30	1.90
													4500
28L - 26	TL	20	172 A6	DB HD	714	1560	690	4545	DW 25 B	DW 23 B		30	2.80
													6300

Performance



High Load Capacity



Durability

STD: Standard - HD DB SPL: Heavy Duty Dual Bead Special - DB HD: Dual Bead Heavy Duty



 Bias



TR 390 IND



TR 390 IND is an industrial tire suitable for industrial trailers and compactors. It features high load capacity and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations using trailers.

Ø 26"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)	
										Rec.	Alt.		2.80	6300
														
28L - 26	TL	20	172 A6	DB HD	714	1560	690	4545	DW 25 B	DW 23 B	30	2.80	6300	

DB HD: Dual Bead Heavy Duty

Technologies



Reinforced Bead

Performance



Cut and Chip Resistance



Durability



Heavy Duty



High Load Capacity





 Bias



TR 391



TR 391 is an agro-industrial tire suitable for transport and compacting operations with sugar cane trailers and compactors. TR 391 features high load capacity and a longer service life.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
14.9 - 24	TL	8	128 A6	STD	405	1270	574	3805	DW 13	DW 11 ; DW 12 ; DW 13 L		30	1.80	1800
14.9 - 24	TL	6	123 A6	STD	405	1270	574	3805	DW 13	DW 11 ; DW 13 L ; DW 12		30	1.40	1550

STD: Standard

Performance



High Load Capacity



Durability



EXCAVATOR





EXCAVATOR



Bias



EM 933 SUPER

EM 933 SUPER has been specially designed for excavators in digging and loading operations. Its exceptional sidewall design with a protruding kerb rib enables the close contact between two tires eliminating the need for a special rubber ring to prevent stone penetration. The unique tread design provides superior traction under heavy-duty service conditions. Additional features of EM 933 SUPER are outstanding riding comfort and enhanced self-cleaning properties.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
290/90 - 20	TT	18	152 B / 168 A2	STD	295	1055	-	-	8.00	-	9.00	5600	3530

STD: Standard

Technologies



Heavy Duty

Performance



Comfort



Self-Cleaning





Traction

EM 934



EM 934 has been specially designed for excavators in road construction applications. It shows excellent lateral traction as well as outstanding self-cleaning features. The unique tread compound offers cut and chip resistance whereas the strong casing provides a long service life.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	7.50
													
10.00 - 20	TT	16	146 B	STD	280	1060	500	3208	7.5	7.0; 8.0	50	3000	
10.00 - 20	TT	16	146 B	SPL	280	1060	500	3208	7.5	7.0; 8.0	50	3000	

STD: Standard - SPL: Special

Performance





EXCAVATOR



Bias

EM 936



EM 936 has been specially designed for excavators and telehandlers in digging and loading operations. Besides, one size is particularly suitable for graders and loaders in grading, loading and transport applications. EM 936 features outstanding riding comfort and enhanced self-cleaning properties. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions. Its "special" version is made of a special compound.

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar	2.50	
	28X9.00-15	TL	6	102 A6	STD	236	750	-	-	7.00 I	6.5 K	30	850	
Ø 20"	10.00 - 20	TT	16	146 B	STD	275	1050	498	3180	7.5	7.0; 8.0	50	3000	
	10.00 - 20	TT	16	146 B	SPL	275	1050	498	3180	7.5	7.0; 8.0	50	3000	
	11.00 - 20	TT	16	149 B	STD	300	1110	508	3302	8.0	7.5; 8.5	50	3250	
	12.5 - 20	TT	12	-	STD	330	1035	464	3210	11.0	-	km/h / bar	3.50	4.50
												40 FR	3350	-
												40 DW	2300	5300
	16.0/70 - 20 (400/70-20)	TL	14	149 B/166 A2	STD	405	1090	480	3295	13 SDC	13	km/h / bar	3.50	4.50
												50	3250	-
												10	-	5300
	16.0/70 - 20 (400/70-20)	TT	14	149 B/166 A2	SPL	405	1090	480	3295	13 SDC	13	km/h / bar	3.50	4.50
												50	3250	-
												10	-	5300
16.0/70 - 20 (400/70-20)	TL	14	149 B/166 A2	SPL	405	1090	480	3295	13 SDC	13	km/h / bar	3.50	4.50	
											50	3250	-	
											10	-	5300	

Performance



Comfort



Handling & Comfort



Heavy Duty



Self-Cleaning



Traction

STD: Standard - SPL: Special





EM 936

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)			
										Rec.	Alt.				
												km/h / bar	4.00	5.00	
Ø 20"	16.0/70 - 20 (400/70-20)	TL	16	152 B/ 168 A2	SPL	405	1090	480	3295	13 SDC	13	50	3550	-	
												10	-	5600	
												km/h / bar	6.75		
												50	2060		
Ø 20"	8.25 - 20	TT	14	133 B	STD	235	980	467	2970	6.5	6.0;7.0	km/h / bar	7.00		
												50	2500		
Ø 20"	9.00 - 20	TT	14	140 B	STD	256	1012	481	3070	7.0	6.5;7.5	km/h / bar	7.00		
												50	2500		
Ø 20"	9.00 - 20	TT	14	140 B	SPL	256	1012	481	3070	7.0	6.5;7.5	km/h / bar	7.00		
												50	2500		
Ø 24"	16.0/70 - 24 (405/70-24)	TL	10	143 B/ 162 A2	STD	404	1170	575	3600	13 SDC	13 (DC)	km/h / bar	2.50	3.20	
												50	2725	-	
												10	-	4750	
												km/h / bar	3.50	4.50	
Ø 24"	16.0/70 - 24 (405/70-24)	TL	14	152 B/ 169 A2	STD	404	1170	575	3600	13 SDC	13 (DC)	50	3550	-	
												10	-	5800	
												km/h / bar	2.50	3.00	
Ø 24"	20 - 24 (22/70-24)	TL	12	158 B/ 173 A2	STD	535	1390	665	4205	16.00 T SDC	-	50	4250	-	
												10	-	6500	
												km/h / bar	7.00		
Ø 25"	17.5 - 25	TL	24	-	DB	450	1340	600	4060	14.00/1.5	-	10	10000		

STD: Standard - SPL: Special - DB: Dual Bead

Performance



Comfort



Handling & Comfort



Heavy Duty



Self-Cleaning





Traction

EM 936 SUPER



EM 936 SUPER has been specifically designed for excavators and telehandlers in digging and loading operations as well as transport applications. With increased tread width by 8-10%, EM 936 SUPER offers outstanding stability and enhanced riding comfort. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	Load capacity (kg/tire)
													
10.00 - 20	TT	14	145 B	STD	277	1080	500	3336	7.5	7.0; 8.0	50	6.50 2900	
10.00 - 20	TT	16	146 B	STD	277	1080	500	3336	7.5	7.0; 8.0	50	7.50 3000	

STD: Standard

Performance



Comfort



Heavy Duty



Stability





Traction



EM 938



EM 938 has been specially designed for excavators in road construction works. The tire is made of a special tread compound, which is particular resistant to cuts and snags, whilst the aggressive tread pattern provides excellent traction. EM 938 features outstanding self-cleaning properties. The strong casing provides extraordinary resistance to impacts and shocks even in heavy-duty operations.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
9.00 - 20	TT	14	140 B	STD	256	1012	481	3070	7.0	6.5 ; 7.5	50	7.00	2500
9.00 - 20	TT	16	-	STD	256	1012	481	3070	7.0	6.5 ; 7.5	50	7.75	2650

STD: Standard

Performance



Handling & Comfort



Heavy Duty



Self-Cleaning





Traction



EM 939



EM 939 has been specially designed for excavators in road construction applications. It has a deeper tread and more lugs ensuring an extended tire life-cycle. The special lug design provides excellent traction during on/off road operations. The tire shows best lateral traction as well as outstanding self-cleaning features. The unique tread compound offers cut and chip resistance whereas the strong casing provides a long service life.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	7.75
													
9.00-20	TT	16	-	STD	260	1025	-	-	7.0	6.5; 7.5	50	2650	
9.00-20	TT	18	-	STD	260	1025	-	-	7.0	6.5; 7.5	km/h / bar	8.50	
											50	2800	
10.00-20	TT	18	-	STD	280	1075	-	-	7.5	7.0; 8.0	km/h / bar	8.50	
											50	3250	

Technologies



Deep Tread

STD: Standard





EXCAVATOR



TR 678



TR 678 has been specially designed for forestry applications. Its robust lug design provides excellent traction and self-cleaning. The strong casing structure stands for high load capacity whereas its steel belts protect the tire from punctures and damages. TR 678 features a cut-resistant tread compound providing excellent cut-and-chip resistance even on difficult terrains under extreme conditions.

Ø 26.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
Ø 26.5"	600/55 - 26.5	TL	20	172 A2 / 165 A8	SB	605	1350	-	-	AG 20.00	-	40	5150
												10	6300
Ø 28.5"	780/50 - 28.5	TL	24	190 A2 / 182 A8	SB	770	1515	-	-	AG 26.00	-	40	8500
												10	10600
Ø 34"	600/65 - 34	TL	14	164 A2 / 160 A6	SB	610	1644	758	4916	DW 20 B	-	40	2400
												30	4500
												10	5000
	600/65 - 34	TL	16	166 A2 / 162 A6	SB	610	1644	758	4916	DW 20 B	-	40	2600
												30	4750
												10	5300
	600/65 - 34	TL	20	170 A2 / 166 A6	SB	610	1644	758	4916	DW 20 B	-	40	3200
												30	5300
												10	6000
	710/55 - 34	TL	14	168 A2 / 163 A6	SB	700	1640	757	4890	DW 24 B	-	40	2400
												30	4875
												10	5600
710/55 - 34	TL	20	173 A2 / 168 A6	SB	700	1640	757	4890	DW 24 B	-	40	3200	
											30	5600	
											10	6500	

Technologies



Steel Belted

Performance



Cut and Chip Resistance



High Load Capacity



Self-Cleaning



Traction

SB: Steel belted





EXCAVATOR



TR 678 IND



TR 678 has been specially designed for forestry applications. Its robust lug design provides excellent traction and self-cleaning. The strong casing structure stands for high load capacity whereas its steel belts protect the tire from punctures and damages. TR 678 features a cut-resistant tread compound providing excellent cut-and-chip resistance even on difficult terrains under extreme conditions.

Ø 22.5"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	4.10	
															Icons
600/40 - 22.5	TL	-	157A8	169A8	DB	615	1085	483	3264	AG 20.00	-	40 FR	5800	40 DW	4125

DB: Dual Bead

Technologies



More Lugs



Steel Belted



Strong Casing

Performance



Cut and Chip Resistance



High Load Capacity



High Puncture Resistance



Self-Cleaning





Traction

MP 570



MP 570 is an agro-industrial tire, which is suitable for excavators and backhoe loaders. This tire provides good traction and durability, as well as excellent self-cleaning properties in all operating conditions.

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
12.5 - 18	TL	12	-	STD	308	990	450	2950	11	12 SDC	km/h / bar	3.50	
											80	2030	
											50	2180	
12.5 - 18	TL	10	-	STD	308	990	450	2950	11	12 SDC	km/h / bar	3.00	
											80	1930	
											50	2000	
Ø 20	12.5 - 20	TL	10	-	STD	335	1050	480	3130	11	12 SDC	km/h / bar	3.00
												80	1850
												50	2065
12.5 - 20	TL	12	-	STD	335	1050	480	3130	11	12 SDC	km/h / bar	3.50	
											80	2060	
											50	2300	
14.5 - 20	TL	12	-	STD	360	1116	505	3325	11	12 SDC	km/h / bar	3.00	
											65	2430	
											50	2500	

STD: Standard

Performance



Durability



Traction



Self-Cleaning





EXCAVATOR



Bias

LUG STAR



LUG STAR is an industrial tire designed for road-rail excavator applications where exceptional traction is required. It features excellent self-cleaning properties and a very resistant tread compound. The robust casing provides excellent durability.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	Load capacity (kg/tire)
10.00 - 20	TT	14	-	-	STD	280	1080	506	3343	7.5	7.0;8.0	5.00	2470
												50	2470
10.00 - 20	TT	18	-	-	STD	280	1080	506	3343	7.5	7.0;8.0	10.00	6890
												10	6890
												25	5300

STD: Standard

Performance



Durability



Self-Cleaning



Traction



EXCAVATOR

◆ Solid

MAGLIFT EXCAVATOR



MAGLIFT EXCAVATOR has been specifically designed for wheeled excavators in digging, loading and road construction operations. The tire is made of a special tread compound, which ensures excellent cut and chip resistance and an extended tire life-cycle. The aggressive tread design provides a high level of handling comfort combined with excellent lateral traction even under heavy-duty service conditions in addition to top self-cleaning properties. Its reinforced bead structure ensures best grip and eliminates any slippage risk during operations, whilst the special bead shape simplifies mounting operations on the rim. MAGLIFT EXCAVATOR is a puncture-and-maintenance-free tire operators can rely on.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
										km/h / bar			
10.00 - 20	-	-	-	-	STD	246	1010	-	-	8.00 - 20	-	Static	7550
												10	5450
												25	5000
												-	
10.00 - 20	-	-	-	-	STD	240	1010	-	-	7.50 - 20	-	Static	7550
												10	5450
												25	5000
												-	
10.00 - 20	-	-	-	-	STD	240	1010	-	-	7.00 - 20	-	Static	7550
												10	5450
												25	5000
												-	
12.00 - 20	-	-	-	-	STD	255	1100	-	-	8.00 - 20	-	Static	9515
												10	6865
												25	6300
												-	
12.00 - 20	-	-	-	-	STD	265	1100	-	-	8.50 - 20	-	Static	9515
												10	6865
												25	6300
												-	

STD: Standard

Performance



Cut and Chip Resistance



Durability



Handling & Comfort



Traction



Self-Cleaning

GRADER



EARTHMAX SR 22



EARTHMAX SR 22 (G-2/L-2) is an All Steel radial tire specially designed for motor graders and loaders operating in extreme winter conditions on ice or snow. Operators will appreciate both excellent traction and stability provided by the large and non-directional tread design. Special tread compound suitable for cold climate. The full depth sipes on tread blocks give maximum traction on snow.

EARTHMAX
RADIAL OTR TIRES

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)														
										Rec.	Alt.	km/h / bar														
										2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	5.25	5.50							
14.00 R 24	TL	*	153 A8/ 175 A2	CRC	366	1370	625	4141	8.00 TG	9.00 GR; 10.00 VA	40	2240	2430	2650	2800	3000	3250	3350	3650	-	-					
											10	-	-	-	-	-	-	-	-	-	6700	6900				
Ø 25"	15.5 R 25	TL	*	146 A8/ 169 A2	CRC	385	1275	557	3841	12.00/1.3	-	40	1550	1750	2000	2180	2360	2575	2800	3000	-	-	-	-	-	-
												10	-	-	-	-	-	-	-	-	-	5000	5150	5450	5600	5800
17.5 R 25	TL	*	153 A8/ 176 A2	CRC	452	1350	590	3950	14.00/1.5	-	-	40	1850	2120	2360	2650	2900	3075	3350	3650	-	-	-	-	-	
												10	-	-	-	-	-	-	-	-	-	6000	6150	6500	6700	7100
17.5 R 25	TL	**	167 B/ 182 A2	CRC	452	1350	590	3950	14.00/1.5	-	-	40	4375	4625	4750	5000	5150	5450	-	-	-	-	-			
												10	-	-	-	-	-	-	7300	7500	7750	8000	8250	8500		
20.5 R 25	TL	**	177 B/ 193 A2	CRC	525	1490	640	4315	17.00/2.0	17.00/1.7	-	40	5800	6150	6500	6700	6900	7300	-	-	-	-	-			
												10	-	-	-	-	-	-	9750	10000	10300	10900	11200	11500		
20.5 R 25	TL	*	161 A8/ 186 A2	CRC	525	1490	640	4315	17.00/2.0	17.00/1.7	-	40	2430	2800	3150	3450	3875	4125	4375	4625	-	-	-	-	-	
												10	-	-	-	-	-	-	-	-	8000	8250	8750	9000	9500	
23.5 R 25	TL	*	170 A8/ 195 A2	CRC	610	1614	709	4863	19.50/2.5	-	-	40	3150	3550	4000	4500	4875	5300	5600	6000	-	-	-	-	-	
												10	-	-	-	-	-	-	-	-	-	10300	10600	11200	11500	12150
23.5 R 25	TL	**	185 B/ 201 A2	CRC	610	1614	709	4863	19.50/2.5	-	-	40	7500	7750	8250	8500	9000	9250	-	-	-	-	-			
												10	-	-	-	-	-	-	12500	12850	13200	13600	14000	14500		

STD: Standard - CRC: Cut Resistant Compound

Technologies



All Steel

Performance



Traction



Stability



Ice and Snow



Durability

EARTHMAX SR 23



EARTHMAX SR 23 (G-2/L-2) is an All Steel radial tire specially designed for motor graders and loaders. It features superior forward and lateral traction as well as exceptional self-cleaning properties. The durable casing and the particularly cut-resistant tread provide a long service life.

EARTHMAX
RADIAL OTR TIRES

Ø 25"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)													
										Rec.	Alt.	km/h / bar													
												1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	4.00	4.25	4.50	4.75	5.00	
15.5 R 25	TL	*	146 A8/ 169 A2	CRC	383	1264	559	3756	12.00/1.3	-	40	1550	1750	2000	2180	2360	2575	2800	3000	-	-	-	-	-	
											10	-	-	-	-	-	-	-	-	-	5000	5150	5450	5600	5800
17.5 R 25	TL	*	153 A8/ 176 A2	CRC	448	1345	612	4108	14.00/1.5	-	40	1850	2120	2360	2650	2900	3075	3350	3650	-	-	-	-	-	
											10	-	-	-	-	-	-	-	-	-	6000	6150	6500	6700	7100
20.5 R 25	TL	*	161 A8/ 186 A2	CRC	535	1490	668	4489	17.00/2.0	-	40	2430	2800	3150	3450	3875	4125	4375	4625	-	-	-	-	-	
											10	-	-	-	-	-	-	-	-	-	8000	8250	8750	9000	9500

CRC: Cut Resistant Compound

Technologies



All Steel

Performance



Traction



Self-Cleaning



Durability



High Puncture Resistance



Radial

EARTHMAX SR 25 PLUS



EARTHMAX SR 25 PLUS (G-2/L-2) is an All Steel radial tire, which has been specially designed for motor graders and loaders operating in the most severe road construction or mining applications. Its non-directional tread design offers excellent self-cleaning properties in addition to traction and stability off the road.

EARTHMAX
RADIAL OTR TIRES

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)										
										Rec.	Alt.	km/h / bar	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	5.25	5.50
14.00 R 24	TL	*	153 A8/ 175 A2	CRC	359	1372	626	4146	8.00 TG	9.00 GR	40	2240	2430	2650	2800	3000	3250	3350	3650	-	-	
											10	-	-	-	-	-	-	-	-	6700	6900	

CRC: Cut Resistant Compound

Technologies



All Steel

Performance



Traction



Self-Cleaning



Durability



Stability



MULTIMAX MP 525

MULTIMAX
RADIAL MPT TIRES



MULTIMAX MP 525 is an All-Steel multi-purpose radial tire designed for telehandlers, compact loaders, and graders in agro-industrial applications. The tire has been specifically developed to carry heavy loads at higher speeds both on and off the road. Indeed, the large non-directional tread design provides exceptional traction on any surface in addition to excellent self-cleaning properties. The strong sidewall ensures exceptional lateral stability in lift mode, making it the ideal choice for agricultural and material handling operations.

MULTIMAX MP 525 is made of a unique, cut- and-chip-resistant tread compound that stands for a longer tire service life thanks to its extraordinary resistance against any kinds of cuts and punctures.

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)				
										Rec.	Alt.	km/h / bar	3.75		4.00	
													2800	3000	-	-
Ø 18"	405/70 R 18 (15.5/70 R 18)	TL	-	146 J/ 141 B/ 153 A2	STD	405	1025	462	3122	13	11; 12	100	2800	3000		
												50	2575	-		
												10	3650	-		
Ø 20"	405/70 R 20 (16.0/70 R 20)	TL	-	152 J/ 168 A2	STD	405	1076	482	3260	13	12; 13 SDC	100	6.00			
												50	3550			
												10	5600			
Ø 24"	455/70 R 24	TL	-	154 G/ 154 B/ 165 A2	STD	455	1250	571	3794	14	13; DW14L	100	4.00	3.75		
												90	3750	-		
												50	-	3750		
												10	-	5150		

Performance



STD: Standard



SKID STEER



GIANT TRAX



GIANT TRAX has been designed for skid steer loaders in scrap yard operations, on rough concrete surfaces, recycling applications and mines. The extra deep tread with wider and sturdier blocks provides best traction, stability, and puncture resistance. The special tread compound results in exceptional cut and chip resistance along with excellent wear resistance on all types of terrains.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 16.5"	10 - 16.5	TL	12	-	STD	270	775	362	2317	8.25	-		6.20	
													10	2375
													15	1875
	10 - 16.5	TL	12	123A8	IMP	270	775	362	2317	8.25	-		6.20	
													40	1550
	12 - 16.5	TL	14	-	STD	315	840	398	2521	9.75	-		6.20	
													10	3075
													15	2430
12 - 16.5	TL	14	-	STD	315	840	398	2521	9.75	-		6.20		
												25	2245	
Ø 17.5"	14 - 17.5	TL	14	155A2	STD	350	915	421	2714	10.50	-		5.50	
													10	3875
													15	3060
													25	2830

STD: Standard - IMP: Implement

Technologies



Extra Deep Tread

Performance



Cut and Chip Resistance



Durability



Heavy Duty



High Puncture Resistance



MUD POWER HD



MUD POWER HD has been specifically engineered for skid steers. Its deep tread design along with the special lug pattern provides excellent traction on wet and soft soil. MUD POWER HD is made of a special industrial compound and features a strong nylon casing resulting in an extended tire life-cycle even under severe conditions.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	Load capacity (kg/tire)
10 - 16.5	TL	10	-	-	STD	268	800	-	-	8.25	-	5.20	2135
												10	1685
												15	1560
												25	
12 - 16.5	TL	10	-	-	STD	315	850	391	2514	9.75	-	4.50	2540
												10	2005
												15	1855
												25	
Ø 17.5"	14-17.5	TL	14	155A2	STD	350	925	-	-	10.50	-	5.50	3875
												10	3060
												15	2830
												25	

STD: Standard

Technologies



Extra Deep Tread

Performance



Durability



Traction





JUMBO TRAX HD



JUMBO TRAX HD is a block pattern tire for skid steers. It features cut and chip resistance and is particularly suitable for heavy-duty service. The deep tread along with excellent sidewall protection provides an extended tire life-cycle. JUMBO TRAX HD is also available in a "special" version.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	Load capacity (kg/tire)
10 - 16.5	TL	10	-	STD	268	795	363	2345	8.25	-		5.20	2135
												10	2135
												15	1685
10 - 16.5	TL	10	120A8	IMP	268	795	363	2345	8.25	-		5.20	1400
												40	1400
10 - 16.5	TL	10	-	SPL	268	795	363	2345	8.25	-		5.20	2135
												10	2135
												15	1685
12 - 16.5	TL	12	-	STD	325	855	387	2522	9.75	-		5.50	2865
												10	2865
												15	2265
12 - 16.5	TL	10	-	STD	325	855	387	2522	9.75	-		4.50	2540
												10	2540
												15	2005
												25	1855

STD: Standard - IMP: Implement - SPL: Special

Technologies



Deep Tread

Performance



Cut and Chip Resistance



Durability



Heavy Duty

SKID POWER




SKID POWER has been designed for skid steers in construction applications. It shows excellent traction as well as enhanced self-cleaning features. The tire features an extra deep tread along with extra sidewall protection providing excellent cut and chip resistance and outstanding durability. SKID POWER is the ideal tire for loose surfaces.

Ø 12"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar	2.80	
Ø 12"	23 X 10.5 - 12	TL	6	90A8	IMP	264	590	-	-	8.5 I - 55	7.00 I - 55; I - 70; I - 90	40 FR	600	
												40 DW	600	
Ø 14"	25 X 8.5 - 14	TL	6	-	STD	213	652	305	1912	7 JA	-	km/h / bar	3.40	
												10	965	
												15	765	
												25	705	
Ø 16.5"	10 - 16.5	TL	8	-	STD	254	775	355	2286	8.25	-	km/h / bar	4.10	
												10	1880	
												15	1485	
												25	1370	
	10 - 16.5	TL	10	-	STD	254	775	355	2286	8.25	-	-	km/h / bar	5.20
													10	2135
													15	1685
													25	1560
	10 - 16.5	TL	8	116A8	IMP	254	775	355	2286	8.25	-	-	km/h / bar	4.10
													40	1250
	12 - 16.5	TL	10	-	STD	305	821	373	2422	9.75	-	-	km/h / bar	4.50
													10	2540
													15	2005
25													1855	
12 - 16.5	TL	10	125A8	IMP	305	821	373	2422	9.75	-	-	km/h / bar	4.50	
												40	1650	

Performance



STD: Standard - IMP: Implement

Ø 17.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
14 - 17.5	TL	14	-	STD	355	940	424	2773	10.5	-		5.50	
												10	3875
												15	3060
14 - 17.5	TL	14	141 A8	IMP	355	940	424	2773	10.5	-		5.50	
												40	2575

STD: Standard - IMP: Implement

Performance





SKID POWER (CHEVRON)



SKID POWER (CHEVRON) has been specially designed for skid steers in construction applications. It features excellent traction as well as enhanced self-cleaning properties. SKID POWER (CHEVRON) is particularly suitable for loose surfaces and shows high cut and chip resistance.

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
7.00 - 15	TL	6	-	-	STD	203	762	347	2295	5.50 F	6 LB	4.10	
												10	1440
												15	1140
7.00 - 15	TL	6	106A8	IMP	203	762	347	2295	5.50 F	6 LB	4.10		
											40	950	

STD: Standard - IMP: Implement

Performance



Traction



Cut and Chip Resistance



Self-Cleaning



SKID POWER HD (A)



SKID POWER HD (A) has been designed for skid steers in construction applications. The tire features an extra deep tread and sidewall protection providing excellent cut and chip resistance and outstanding durability. SKID POWER HD (A) is the ideal tire for loose surfaces and heavy-duty service.

Ø 8"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 8"	18 X 8.5 - 8	TL	8	97A2	STD	210	460	207	1357	7.00 I - 55; I - 70; I - 90	-		10	740
													15	585
													25	540
Ø 12"	23 X 8.50 - 12	TL	6	87A8	IMP	215	585	271	1764	7.00 I - 55	7.00 I - 70; 7 JA		10	3.40
													40	545
	23 X 8.50 - 12	TL	6	-	STD	215	585	271	1764	7.00 I - 55	7.00 I - 70; 7 JA		10	3.40
													15	820
													25	650
	23 X 8.50 - 12	TL	8	-	STD	215	585	271	1764	7.00 I - 55	7.00 I - 70; 7 JA		10	4.40
													15	940
													25	745
	23 X 8.50 - 12	TL	12	-	STD	215	585	271	1764	7.00 I - 55	7.00 I - 70; 7 JA		10	6.20
													15	1150
													25	910
	23 X 8.50 - 12	TL	12	98A8	IMP	215	585	271	1764	7.00 I - 55	7.00 I - 70; 7 JA		10	6.20
													40	750
	26 X 12 - 12	TL	8	-	STD	305	660	297	1947	10.50 I - 55	8.50 I - 55; 10.50 I - 70; 8½ JA; 9½ JA; 10½ JA		10	3.40
													15	1370
													25	1080
													1000	

STD: Standard - IMP: Implement

Performance



Ø 12"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
26 X 12 - 12	TL	10	-	STD	305	660	297	1947	10.50 I - 55	8.50 I - 55 ; 10.50 I - 70 ; 8½ JA ; 9½ JA ; 10½ JA		10	1595	
												15	1260	
												25	1165	
26 X 12 - 12	TL	12	-	STD	305	660	307	1989	10.50 I - 55	8.50 I - 55 ; 10.50 I - 70 ; 8½ JA ; 9½ JA ; 10½ JA		10	1800	
												15	1420	
												25	1315	
26 X 12 - 12	TL	12	114A8	IMP	305	660	297	1947	10.50 I - 55	8.50 I - 55 ; 10.50 I - 70 ; 8½ JA ; 9½ JA ; 10½ JA		40	1180	
27 X 10 - 12 (250/75 - 12)	TT	14	-	IND	255	700	-	-	8.00 G	-		25	2725	
Ø 15"	27 X 8.50 - 15	TL	8	-	STD	218	676	324	2004	7 JA	-		10	1310
													15	1035
													25	955
													40	850
27 X 10.5 - 15	TL	8	-	STD	256	684	326	2037	8 LB	-		10	1405	
												15	1110	
												25	1025	
27 X 10.5 - 15	TL	8	105A8	IMP	256	684	326	2037	8 LB	-		40	925	
27 X 10.5 - 15	TL	8	108A6	TRTR	256	684	326	2037	8 LB	-		30	1000	
31 X 15.5 - 15	TL	8	-	STD	400	790	378	2411	13 LB	-		15	1655	
												50	1255	

Performance



STD: Standard - IMP: Implement - IND: Industrial - TRTR: Tractor Trailer

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)		
										Rec.	Alt.		km/h / bar		
Ø 15"	31 X 15.5 - 15	TL	10	139 A2/ 121 B	STD	400	790	378	2411	13 LB	-		4.20		
													10	2450	
													15	1960	
	31 X 15.5 - 15	TL	10	125 A8	IMP	400	790	378	2411	13 LB	-		4.20		
													40	1650	
Ø 16.5"	10 - 16.5	TL	8	-	STD	267	780	362	2350	8.25	-		4.10		
													10	1880	
													15	1485	
	10 - 16.5	TL	8	116 A8	IMP	267	780	362	2350	8.25	-		4.10		
													40	1250	
	10 - 16.5	TL	10	-	STD	267	780	362	2350	8.25	-		5.20		
													10	2135	
													15	1685	
	12 - 16.5	TL	10	-	STD	324	850	388	2571	9.75	-		4.50		
													10	2540	
													15	2005	
	12 - 16.5	TL	10	125 A8	IMP	324	850	388	2571	9.75	-		4.50		
													40	1650	
	12 - 16.5	TL	12	130 A8	IMP	324	850	388	2571	9.75	-		5.50		
													40	1900	
	12 - 16.5	TL	12	-	STD	324	850	388	2571	9.75	-		5.50		
													10	2865	
													15	2265	
	12 - 16.5	TL	14	-	STD	324	850	388	2571	9.75	-		6.20		
													10	3075	
													15	2430	
														25	2245

STD: Standard - IMP: Implement

Performance



Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	5.20
Ø 16.5"	260/70 - 16.5 (10 - 16.5)	TL	10	120A8	IMP	267	775	355	2295	8.25	-	40	1400
												km/h / bar	4.80
												10	2435
Ø 16.5"	31.5 X 13 - 16.5	TL	10	-	STD	330	795	363	2345	9.75	-	15	1925
												25	1780
												km/h / bar	4.80
Ø 16.5"	31.5 X 13 - 16.5	TL	10	124A8	IMP	330	795	363	2345	9.75	-	40	1600
												km/h / bar	4.10
												10	3150
Ø 16.5"	33 X 15.5 - 16.5	TL	12	148A2	STD	394	838	387	2563	13.00	-	15	2490
												25	2300
												km/h / bar	4.10
Ø 16.5"	33 X 15.5 - 16.5	TL	12	131A8	IMP	394	838	387	2563	13.00	-	40	1950
												km/h / bar	4.80
												10	3450
Ø 16.5"	33 X 15.5 - 16.5	TL	14	151A2	STD	394	838	387	2563	13.00	-	15	2725
												25	2520
												km/h / bar	5.50
Ø 17.5"	14 - 17.5	TL	14	-	STD	350	930	420	2744	10.50	-	10	3875
												15	3060
												25	2830
Ø 17.5"	14 - 17.5	TL	14	140A8	IMP	350	930	420	2744	10.50	-	40	2500
												km/h / bar	5.50
												10	4565
Ø 19.5"	15 - 19.5	TL	14	-	STD	400	1019	463	3075	11.75	12.25	15	3605
												25	3330
												km/h / bar	4.85
Ø 19.5"	15 - 19.5	TL	14	146A8	IMP	400	1019	463	3075	11.75	12.25	40	3000
												km/h / bar	4.85
												10	4565

Performance



STD: Standard - IMP: Implement



SKID POWER HD (B)



SKID POWER HD (B) has been designed for skid steers in construction applications. The tire features an extra deep tread and sidewall protection providing excellent cut and chip resistance and outstanding durability. SKID POWER HD (B) is the ideal tire for loose surfaces and heavy-duty service.

Ø 10"	Tire size	TYPE	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		Load capacity (kg/tire)	
						(mm)	(mm)	(mm)	(mm)	Rec.	Alt.	km/h / bar	
18 X 8.5 - 10	TL	8	96 A2	STD	205	465	211	1393	7.00 I - 55; I - 70; I - 90	-	3.00		
											10	720	
											15	570	
18 X 8.5 - 10	TL	8	82 A8	IMP	205	465	213	1372	7.00 I - 55; I - 70; I - 90	-	3.00		
											40	475	

STD: Standard - IMP: Implement

Performance



SKID POWER SK



SKID POWER SK has been specially designed for skid steers in construction applications. Its sidewall and rim guard protectors as well as its deep tread provide an extended tire life-cycle.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
10 - 16.5	TL	8	-	-	STD	270	775	355	2286	8.25	-	10	4.10
												15	1880
												25	1485
10 - 16.5	TL	8	116A8	-	IMP	270	775	355	2286	8.25	-	40	5.20
													1250
10 - 16.5	TL	10	-	-	STD	270	775	355	2286	8.25	-	10	6.20
												15	2135
												25	1685
10 - 16.5	TL	10	120A8	-	IMP	270	775	355	2286	8.25	-	40	5.20
													1400
10 - 16.5	TL	12	138A2	-	STD	270	775	355	2286	8.25	-	10	6.20
												15	2375
												25	1875
12 - 16.5	TL	10	-	-	STD	312	825	375	2434	9.75	-	10	4.50
												15	2540
												25	2005
12 - 16.5	TL	10	125A8	-	IMP	312	825	375	2434	9.75	-	40	4.50
													1650
12 - 16.5	TL	12	-	-	STD	312	825	375	2434	9.75	-	10	5.50
												15	2865
												25	2265
12 - 16.5	TL	12	130A8	-	IMP	312	825	375	2434	9.75	-	40	5.50
													1900

Technologies



Deep Tread

Performance



Durability

STD: Standard - IMP: Implement



SKID POWER PLUS



SKID POWER PLUS has been designed for skid steers in construction applications. Its wider lugs provide excellent traction as well as enhanced self-cleaning properties. The tire features an extra deep tread along with enhanced sidewall protection providing excellent cut-and-chip resistance and outstanding durability. SKID POWER PLUS is the ideal tire for loose surfaces. The wide contact area provides excellent stability during operations.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
10 - 16.5	TL	8	-	-	STD	252	775	-	-	8.25	-	4.10	
												10	1880
												15	1485
10 - 16.5	TL	10	-	-	STD	252	775	-	-	8.25	-	5.20	
												10	2135
												15	1685
10 - 16.5	TL	10	-	-	SPL	252	775	-	-	8.25	-	5.20	
												10	2135
												15	1685
												25	1560

STD: Standard - SPL: Special

Technologies



Extra Deep Tread

Performance



Traction



Cut and Chip Resistance



Self-Cleaning



SNOW RIDE (A)



SNOW-RIDE is particularly suitable for municipality and maintenance applications in winter conditions with compact loaders and skid steers. It features excellent traction and is ideal for ice and snow operations. Its specially designed tread pattern eliminates slippage risks and ensures a longer tire life-cycle.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 16"	12.5/70 - 16	TL	6	-	STD	315	850	385	2550	10 LB	-		2.00	
													10	1410
Ø 16"	12.5/70 - 16	TL	10	-	STD	315	850	385	2550	10 LB	-		3.20	
													10	1855
Ø 16.5"	10 - 16.5	TL	10	-	STD	270	780	357	2340	8.25	-		5.20	
													10	2135
Ø 16.5"	10 - 16.5	TL	6	-	STD	270	780	357	2340	8.25	-		3.10	
													10	1590
Ø 16.5"	12 - 16.5	TL	6	-	STD	305	835	379	2505	9.75	-		2.80	
													10	1915
Ø 16.5"	12 - 16.5	TL	10	-	STD	305	835	379	2505	9.75	-		4.50	
													10	2540
Ø 18"	15.5/60 - 18	TL	10	-	STD	395	938	425	2814	W 13	-		2.60	
													10	2400
Ø 20"	17.5/65 - 20	TL	10	-	STD	445	1095	493	3285	W 14 L	-		2.40	
													10	3195

STD: Standard

Technology



Performance





SURE TRAX HD



SURE TRAX HD is a block pattern tire for skid steers in construction applications. It shows excellent cut and chip resistance as well as top rim protection. SURE TRAX HD is ideal for paved surfaces and heavy-duty service.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
10 - 16.5	TL	10	-	-	STD	268	785	359	2316	8.25	-	5.20	
												10	2135
												15	1685
12 - 16.5	TL	12	-	-	STD	325	855	387	2522	9.75	-	5.50	
												10	2865
												15	2265
12 - 16.5	TL	12	130A8	IMP	325	855	387	2522	9.75	-	-	5.50	
												40	1900
33 X 15.5 - 16.5	TL	14	151A2	IND	400	855	-	-	-	13.00	-	4.80	
												10	3450
												15	2725
												25	2520

Performance



STD: Standard - IMP: Implement





SKID MAX SR-SKIDDER



SKID MAX SR-SKIDDER is the new BKT All Steel radial tire specially developed for use in very heavy work environments on hard improved surfaces like road maintenance and waste dump with skid steers, backhoe loaders and telehandlers. Thanks to the strong steel casing and belt construction, this tire provides superior durability and high load carrying capacity. The robust and wide tread pattern designed with continuous center rib, together with an extremely abrasion resistant and antistatic tread compound, ensures excellent traction and long wear life. The extra thick sidewall and the tough casing provide also exceptional durability minimizing the risk of punctures and accidental damages thereby reducing machine downtime. The specially designed rim guard guarantees protection against flats and wheel damage in the rim flange area. Do not forget that SKID MAX SR-SKIDDER provides also excellent comfort and stability during your daily work.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
										km/h / bar			
260/70 R 16.5 (10 R 16.5)	TL	-	129A8/B	IND	263	776	352	2367	8.25	7.50 ; 9.00	5.00		
											40		1850
											50		1850
300/70 R 16.5 (12 R 16.5)	TL	-	137A8/B	IND	306	830	378	2530	9.75	-	5.00		
											40		2300
											50		2300

IND: Industrial

Technologies



All Steel



Steel Belted



Special Antistatic Compound

Performance



High Load Capacity



Cut and Chip Resistance



Durability



Traction



Comfort



Stability



POWER TRAX HD (SS)



POWER TRAX HD premium tire is specially designed for equipment in port and underground mining applications. Its deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut and chip resistance, which is particularly suitable for rough and hard surfaces. The specially designed rim guard ensures protection against flats and wheel damage in the rim flange area.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
10 - 16.5	TL	10	-	STD	268	790	361	2331	8.25	-		5.20	2135
												10	2135
												15	1685
10 - 16.5	TL	10	120A8	IMP	268	790	361	2331	8.25	-		5.20	1400
												40	1400
12 - 16.5	TL	10	-	STD	324	865	391	2552	9.75	-		4.50	2540
												10	2540
												15	2005
12 - 16.5	TL	12	-	STD	324	865	391	2552	9.75	-		5.50	2865
												10	2865
												15	2265
12 - 16.5	TL	14	-	STD	324	865	391	2552	9.75	-		6.20	3075
												10	3075
												15	2430
												25	2245

STD: Standard - IMP: Implement

Technologies



Extra Deep Tread

Performance



Cut and Chip Resistance



Durability



High Puncture Resistance

TELEHANDLER



MULTIMAX MP 569



The new tire MULTIMAX MP 569 is specifically designed for agro trucks. It is the innovative solution that enhances both tractor and truck performance features to meet the special needs of modern farming during several applications. Thanks to its All Steel casing, the tire stands out for its high speed capability and durability. The optimized tread pattern provides enhanced traction on field and great selfcleaning properties, together with an extremely comfortable drive on road and great stability. Not to mention that MULTIMAX MP 569 ensures significant savings in fuel consumption thanks to a low rolling resistance.

Ø 22.5"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	9.00
445/65 R 22.5 (18 R 22.5)	TL	-	169 J	STD	440	1174	528	3558	13.00	13.00	100	5800	

Technology



Performance



MULTIMAX MP 522



MULTIMAX MP 522 is the BKT multi-purpose tire developed for agro-industrial applications. It is suitable for all lifting and loading operations on vehicles such as telehandlers and compact loaders. Stability and traction are its strengths as well as outstanding puncture resistance. Thanks to its special compound, MULTIMAX MP 522 has an incredible cut and chip resistance.

MULTIMAX
RADIAL MPT TIRES

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)									
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
280/80 R 18 IND	TL	-	132 A8/B	STD	282	907	421	2748	W 9; 9; 9 SDC	W 8; W 10	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	960	1140	1300	1480	1660	1780	2000	-	-	
											40	960	1140	1300	1480	1660	1780	2000	-	-	
											30	1030	1220	1395	1585	1780	1905	2140	-	-	
											25	1070	1270	1445	1645	1845	1980	2220	-	-	
											10 Cyc.	1170	1440	1695	1950	2220	2415	2730	2880	3000	
Static	1795	2210	2600	2990	3405	3705	4190	4420	4600												
340/80 R 18 IND (12.5/80 R 18)	TL	-	143 A8/B	STD	343	1006	458	3023	11; 11 SDC; W 11	W 10; 12; 12 SDC	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1310	1555	1775	2020	2265	2430	2725	-	-	
											40	1310	1555	1775	2020	2265	2430	2725	-	-	
											30	1405	1665	1900	2165	2425	2600	2920	-	-	
											25	1455	1725	1970	2240	2515	2695	3025	-	-	
											10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090	
Static	2450	3010	3545	4080	4640	5050	5710	6020	6270												
Ø 20"	340/80 R 20 IND	TL	-	144 A8/B	STD	343	1052	481	3212	11	W 10; 11 SDC; W 11; 12; 12 SDC	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
												50	1345	1600	1820	2075	2325	2495	2800	-	-
												40	1345	1600	1820	2075	2325	2495	2800	-	-
												30	1440	1710	1950	2220	2490	2670	3000	-	-
												25	1495	1775	2025	2305	2585	2770	3110	-	-
												10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200
Static	2515	3095	3640	4190	4770	5185	5865	6185	6440												
380/75 R 20 IND (14.5 R 20)	TL	-	148 A8/B	STD	384	1074	483	3251	W 12	W 11; 11; 12	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	4.2	4.4
											50	1500	1770	2040	2305	2575	2860	3005	3150	-	-
											40	1500	1770	2040	2305	2575	2860	3005	3150	-	-
											30	1610	1900	2195	2490	2780	3075	3220	3370	-	-
											25	1670	1975	2280	2585	2890	3195	3350	3500	-	-
											10 Cyc.	1850	2260	2670	3080	3490	3900	4110	4315	4520	4730
Static	2840	3470	4100	4730	5360	5990	6305	6620	6935	7250											
400/70 R 20 IND (16.0/70 R 20)	TL	-	149 A8/B	STD	404	1068	476	3199	13	12 SDC; 13 SDC; 14	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1560	1855	2115	2405	2700	2895	3250	-	-	
											40	1560	1855	2115	2405	2700	2895	3250	-	-	
											30	1675	1985	2265	2580	2890	3100	3480	-	-	
											25	1735	2060	2350	2675	3000	3215	3610	-	-	
											10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875	
Static	2920	3590	4225	4860	5535	6020	6805	7180	7475												

STD: Standard

Technology



Performance



Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)													
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4				
																				50	40	30	25	10 Cyc.	Static
400/70 R 24 IND	TL	-	152 A8/B	STD	404	1170	533	3527	13	DW 12 ; 13 SDC ; DW 13 ; DW 13 L ; DW 14 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	1705	2025	2310	2630	2950	3160	3550	-	-					
											40	1705	2025	2310	2630	2950	3160	3550	-	-					
											30	1825	2170	2470	2815	3155	3385	3800	-	-					
											25	1895	2250	2565	2920	3275	3515	3945	-	-					
											10 Cyc.	2080	2560	3010	3465	3945	4290	4850	5115	5325					
											Static	3185	3920	4615	5310	6045	6575	7435	7840	8165					
400/80 R 24 IND	TL	-	162 A8/B	STD	404	1250	553	3778	DW 13	DW 12 ; DW 13 L ; DW 14 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4
											50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
											40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
											30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-
											25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-
											10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125
											Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925
440/80 R 24 IND	TL	-	161 A8/B	STD	441	1314	586	3958	DW 14 L	DW 13 ; DW 13 L ; DW 15 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2220	2640	3010	3425	3840	4120	4625	-	-					
											40	2220	2640	3010	3425	3840	4120	4625	-	-					
											30	2380	2825	3220	3665	4110	4410	4950	-	-					
											25	2465	2930	3340	3800	4265	4575	5135	-	-					
											10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940					
											Static	4150	5110	6015	6920	7875	8570	9685	10215	10640					
460/70 R 24 IND (17.5L R 24)	TL	-	159 A8/B	STD	465	1250	568	3766	DW 15 L	DW 14 L ; DW 16 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2100	2495	2845	3240	3635	3895	4375	-	-					
											40	2100	2495	2845	3240	3635	3895	4375	-	-					
											30	2250	2675	3050	3470	3890	4170	4685	-	-					
											25	2335	2775	3160	3600	4035	4330	4860	-	-					
											10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565					
											Static	3930	4835	5690	6545	7450	8105	9160	9665	10065					
500/70 R 24 IND (19.5L R 24)	TL	-	164 A8/B	STD	503	1310	595	3940	DW 16 L	DW 15 L ; DW 18 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2400	2850	3250	3700	4150	4450	5000	-	-					
											40	2400	2850	3250	3700	4150	4450	5000	-	-					
											30	2570	3050	3480	3960	4445	4765	5350	-	-					
											25	2665	3165	3610	4110	4610	4940	5550	-	-					
											10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500					
											Static	4485	5520	6500	7475	8510	9260	10465	11040	11500					
540/70 R 24 IND	TL	-	168 A8/B	STD	530	1366	611	4133	DW 16 L	DW 18 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2690	3195	3640	4145	4650	4985	5600	-	-					
											40	2690	3195	3640	4145	4650	4985	5600	-	-					
											30	2880	3420	3900	4440	4980	5340	5995	-	-					
											25	2990	3550	4045	4605	5165	5540	6220	-	-					
											10 Cyc.	3280	4035	4750	5460	6220	6765	7645	8065	8400					
											Static	5025	6185	7280	8375	9535	10370	11725	12365	12880					

Technology



Steel Belted



Special Compound

Performance



Stability



Traction




High Puncture Resistance



Cut and Chip Resistance

STD: Standard

Ø 26"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)														
										Rec.	Alt.	km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6				
																										
480/80 R 26 IND	TL	-	160 A8/B	STD	479	1428	638	4287	DW 15 L	DW 16 L	50	2610	3060	3330	3555	3780	4005	4275	4500	-	-					
											40	2610	3060	3330	3555	3780	4005	4275	4500	-	-					
											30	2795	3275	3565	3805	4045	4290	4575	4815	-	-					
											25	2900	3400	3700	3950	4200	4450	4750	4995	-	-					
											10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750					
											Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350					
480/80 R 26 IND	TL	-	167 A8/B	STD	479	1428	638	4287	DW 15 L	DW 16 L	km/h / bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.2	4.4
											50	2575	2815	3055	3295	3540	3780	4020	4260	4500	4740	4975	5215	5450	-	-
											40	2575	2815	3055	3295	3540	3780	4020	4260	4500	4740	4975	5215	5450	-	-
											30	2790	3045	3300	3550	3805	4060	4315	4565	4820	5075	5330	5580	5835	-	-
											25	2890	3155	3420	3680	3945	4210	4475	4735	5000	5265	5525	5790	6050	-	-
											10 Cyc.	3200	3555	3910	4265	4620	4975	5330	5685	6040	6395	6750	7105	7460	7815	-
Static	4900	5445	5990	6535	7080	7625	8170	8715	9260	9805	10350	10895	11445	11990	12535											
Ø 28"	440/80 R 28 IND	TL	-	156 A8/B	STD	441	1415	643	4278	DW 14 L	DW 13 ; DW 13 L ; DW 15 L	km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6				
												50	2300	2725	2940	3150	3360	3575	3790	4000	-	-				
												40	2300	2725	2940	3150	3360	3575	3790	4000	-	-				
												30	2480	2930	3155	3380	3605	3830	4055	4280	-	-				
												25	2570	3040	3270	3505	3740	3970	4205	4440	-	-				
												10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000				
Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200																

STD: Standard

Technology



Steel Belted



Special Compound

Performance



Stability



Traction



High Puncture Resistance



Cut and Chip Resistance



MULTIMAX MP 527



MULTIMAX MP 527 is a multi-purpose radial tire designed for telehandlers and compact loaders in agro-industrial applications. The tire shows a block pattern design providing excellent traction even on the harder surfaces. The strong sidewall ensures outstanding stability in lift mode. MULTIMAX MP 527 is made of a special cut-and-chipresistant compound providing and a long service life.

MULTIMAX
RADIAL MPT TIRES

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)									
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
												50	40	30	25	10 Cyc.	Static	50	40	30	25
340/80 R 18 IND	TL	.	143 A8/B	STD	343	1001	455	3028	11; 11 SDC; W 11	W 10; 12; 12 SDC	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1310	1555	1775	2020	2265	2430	2725	-	-	
360/70 R 18 IND	TL	.	142 A8/B	STD	360	969	439	2887	11	W 10; 11 SDC; W 11; 12; 12 SDC	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1275	1515	1725	1965	2200	2360	2650	-	-	
340/80 R 20 IND	TL	-	144 A8/B	STD	343	1052	483	3176	11	W 10; 11 SDC; W 11; 12; 12 SDC	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1345	1600	1820	2075	2325	2495	2800	-	-	
400/70 R 20 IND (16.0/70 R 20)	TL	-	149 A8/B	STD	404	1068	494	3282	13	12 SDC; 13 SDC; 14	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1560	1855	2115	2405	2700	2895	3250	-	-	
400/70 R 24 IND	TL	-	152 A8/B	STD	404	1170	542	3597	13	DW 12; DW 13; DW 13 L; 13 SDC; DW 14 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1705	2025	2310	2630	2950	3160	3550	-	-	

STD: Standard

Technologies



Performance



Technologies



Block Pattern

Performance



Stability



Traction



High Load Capacity



Cut and Chip Resistance



Hard Surfaces

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)																				
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4						
												50	40	30	25	10 Cyc.	Static	50	40	30	25	10 Cyc.	Static	50	40	30	25	10 Cyc.	Static	50	40	30
400/80 R 24 IND	TL	-	162 A8/B	STD	404	1250	578	3834	DW 13	DW 12; DW 13 L; DW 14 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4							
											50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-							
											40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-							
											30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-							
											25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-							
											10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125							
											Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925							
											km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4												
											50	2220	2640	3010	3425	3840	4120	4625	-	-												
											40	2220	2640	3010	3425	3840	4120	4625	-	-												
											30	2380	2825	3220	3665	4110	4410	4950	-	-												
											25	2465	2930	3340	3800	4265	4575	5135	-	-												
											10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940												
											Static	4150	5110	6015	6920	7875	8570	9685	10215	10640												
											440/80 R 24 IND	TL	-	161 A8/B	STD	441	1314	601	3985	DW 14 L	DW 13; DW 13 L; DW 15 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
50	2100	2495	2845	3240	3635	3895	4375	-	-																							
40	2100	2495	2845	3240	3635	3895	4375	-	-																							
30	2250	2675	3050	3470	3890	4170	4685	-	-																							
25	2335	2775	3160	3600	4035	4330	4860	-	-																							
10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565																							
Static	3930	4835	5690	6545	7450	8105	9160	9665	10065																							
km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																							
50	2400	2850	3250	3700	4150	4450	5000	-	-																							
40	2400	2850	3250	3700	4150	4450	5000	-	-																							
30	2570	3050	3480	3960	4445	4765	5350	-	-																							
25	2665	3165	3610	4110	4610	4940	5550	-	-																							
10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500																							
Static	4485	5520	6500	7475	8510	9260	10465	11040	11500																							
Ø 26"	480/80 R 26 IND	TL	-	160 A8/B	STD	479	1428	642	4259	DW 15 L												DW 16 L	km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.2	3.2	3.4
											50	2610	3060	3330	3555	3780	4005	4275	4500	-	-											
											40	2610	3060	3330	3555	3780	4005	4275	4500	-	-											
											30	2795	3275	3565	3805	4045	4290	4575	4815	-	-											
											25	2900	3400	3700	3950	4200	4450	4750	4995	-	-											
											10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750											
											Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350											
											km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.2	3.2	3.4	3.6											
											50	2300	2725	2940	3150	3360	3575	3790	4000	-	-											
											40	2300	2725	2940	3150	3360	3575	3790	4000	-	-											
											30	2480	2930	3155	3380	3605	3830	4055	4280	-	-											
											25	2570	3040	3270	3505	3740	3970	4205	4440	-	-											
											10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000											
											Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200											
											Ø 28"	440/80 R 28 IND	TL	-	156 A8/B	STD	441	1415	648	4270	DW 14 L		DW 13; DW 13 L; DW 15 L	km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.2	3.2
50	2300	2725	2940	3150	3360	3575	3790	4000	-	-																						
40	2300	2725	2940	3150	3360	3575	3790	4000	-	-																						
30	2480	2930	3155	3380	3605	3830	4055	4280	-	-																						
25	2570	3040	3270	3505	3740	3970	4205	4440	-	-																						
10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000																						
Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200																						

STD: Standard

MULTIMAX MP 529



MULTIMAX MP 529 is a steel belted multi-purpose radial tire designed for telehandlers in industrial applications. Its tread design has been specially developed for hard surfaces. The strong sidewall and the larger footprint area ensure outstanding stability in lift mode. MULTIMAX MP 529 also features a strong puncture-resistant casing and is made of a special cut-and-chip-resistant compound providing extraordinary durability and a long service life.

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)									
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
340/80 R 18	TL	-	143A8/B	STD	343	1001	445	3007	11 ; 11 SDC ; W 11	W 10 ; 12 ; 12 SDC	50	1310	1555	1775	2020	2265	2430	2725	-	-	
											40	1310	1555	1775	2020	2265	2430	2725	-	-	
											30	1405	1665	1900	2165	2425	2600	2920	-	-	
											25	1455	1725	1970	2240	2515	2695	3025	-	-	
											10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090	
											Static	2450	3010	3545	4080	4640	5050	5710	6020	6270	

STD: Standard

Technology



Larger Footprint



Steel Belted

Performance



Cut and Chip Resistance



Durability



Hard Surfaces



High Puncture Resistance




Stability



RT 747 AGRO INDUSTRIAL



RT 747 AGRO INDUSTRIAL is a radial agro-industrial tire suitable for compact loaders and telehandlers. Its extra wide lugs provide excellent traction and great stability in lifting operations. It has been designed with a special cut-and-chip resistance compound that enables the tire to carry heavy loads. RT 747 AGRO INDUSTRIAL is the right answer to all general farming operations that need outstanding versatility.

Ø 16"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)							
										Rec.	Alt.	km/h / bar	1.2	1.6	2.0	2.2	2.4	2.6	
												10	30	40	10 Cyc	Static			
Ø 16"	11L R 16	TL	-	122 A8/B	STD	290	850	371	2497	W 8	W 10 L	10	30	40	10 Cyc	Static			
												1265	1530	1790	1920	2055	2200		
												940	1165	1385	1500	1610	-		
												880	1085	1295	1395	1500	-		
												1670	2060	2415	2805	3160	3550		
												1670	2060	2415	2805	3160	3550		
1785	2205	2585	3000	3380	3800														
1850	2285	2680	3115	3505	3940														
2505	3090	3620	4205	4740	5325														
3505	4325	5070	5890	6635	7455														
Ø 24"	460/70 R 24 (17.5L R 24)	TL	-	152 A8/B	STD	465	1254	556	3840	DW 15 L	DW 14 L; DW 16 L	50	40	30	25	10 Cyc	Static		
												1670	2060	2415	2805	3160	3550		
												1670	2060	2415	2805	3160	3550		
												1785	2205	2585	3000	3380	3800		
												1850	2285	2680	3115	3505	3940		
												2505	3090	3620	4205	4740	5325		
3505	4325	5070	5890	6635	7455														
Ø 24"	460/70 R 24 (17.5L R 24)	TL	-	159 A8/ 156 B	STD	465	1254	556	3840	DW 15 L	DW 14 L; DW 16 L	50	40	30	25	10 Cyc	Static		
												1535	1890	2245	2560	2915	3265	3505	4000
												1705	2100	2495	2845	3240	3630	3895	4375
												1775	2185	2595	2960	3370	3775	4050	4550
												1805	2225	2645	3015	3435	3850	4130	4640
												2560	3150	3745	4270	4860	5445	5845	6565
3920	4830	5740	6545	7450	8350	8960	10065												
Ø 24"	500/70 R 24 (19.5L R 24)	TL	-	157 A8/ 154 B	STD	485	1320	585	3949	DW 16 L	DW 15 L; DW 18 L	50	40	30	25	10 Cyc	Static		
												1765	2175	2550	2965	3340	3750		
												1940	2395	2805	3260	3670	4125		
												2075	2560	3000	3490	3930	4415		
												2155	2655	3115	3620	4075	4580		
												2910	3590	4210	4890	5510	6190		
4075	5025	5890	6845	7710	8665														

STD: Standard

Technology



Performance



AS 504



AS 504 is an agro-industrial tire mainly designed for soil tillage, implement and material-handling operations. This tire, which features excellent self-cleaning properties and increased grip, is suitable for field trailers and telehandlers. AS 504 is available in several versions to meet specific end-user requirements: an "HD" version with a special cut-and-chip resistance compound, while the "special" version has a reinforced casing that ensures a longer tire life.

Ø 12"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.		
6.5/80 - 12	TT	4	-	72 A8	84 A8	STD	169	608	283	1836	5 J	5 JA	2.40		
													10 FR	700	
													25 FR	595	
													30 FR	560	
													40 FR	500	
													10 DW	495	
													25 DW	420	
													30 DW	400	
40 DW	355														
6.5/80 - 12	TL	4	-	72 A8	84 A8	STD	169	608	283	1836	5 J	5 JA	2.40		
													10 FR	700	
													25 FR	595	
													30 FR	560	
													40 FR	500	
													10 DW	495	
													25 DW	420	
													30 DW	400	
40 DW	355														
6.5/80 - 12	TT	6	-	80 A8	93 A8	STD	169	608	283	1836	5 J	5 JA	3.60		
													10 FR	910	
													25 FR	775	
													30 FR	730	
													40 FR	650	
													10 DW	630	
													25 DW	535	
													30 DW	505	
40 DW	450														

STD: Standard

Technology



Performance



Ø 12"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
6.5/80 - 12	TL	6	-	80A8	93A8	STD	169	608	283	1836	5 J	5 JA	3.60		
													10 FR	910	
													25 FR	775	
													30 FR	730	
													40 FR	650	
													10 DW	630	
													25 DW	535	
													40 DW	450	
6.5/80 - 12	TT	6	-	80A8	93A8	HD	169	608	283	1836	5 J	5 JA	3.60		
													10 FR	910	
													25 FR	775	
													30 FR	730	
													40 FR	650	
													10 DW	630	
													25 DW	535	
													40 DW	450	
7.00 - 12	TT	6	-	83A8	95A8	STD	187	683	300	2001	4.5	-	2.50		
													10 FR	965	
													25 FR	820	
													30 FR	775	
													40 FR	690	
													10 DW	680	
													25 DW	575	
													40 DW	485	

STD: Standard - HD: Heavy Duty

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

Ø 12"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
7.00 - 12	TT	4	-	75 A8	88 A8	STD	187	683	311	2049	4.5	-			1.70
															785
															665
															625
															560
															540
															460
															430
385															
7.00 - 12	TL	4	-	75 A8	88 A8	STD	187	683	311	2049	4.5	-			1.70
															785
															665
															625
															560
															540
															460
															430
385															
7.00 - 12	TL	6	-	83 A8	95 A8	STD	187	683	311	2049	4.5	-			2.50
															965
															820
															775
															690
															680
															575
															545
485															

STD: Standard

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability



Ø 12"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar		
7.00 - 12	TL	8	-	88A8	100A8	AB	187	683	311	2049	4.5	-			3.30	
															10 FR	1120
															25 FR	950
															30 FR	895
															40 FR	800
															10 DW	785
															25 DW	665
															40 DW	560
7.00 - 12	TL	8	-	88A8	100A8	SPL	187	683	311	2049	4.5	-			3.30	
															10 FR	1120
															25 FR	950
															30 FR	895
															40 FR	800
															10 DW	785
															25 DW	665
															40 DW	560
10.0/80 - 12	TL	-	-	109A8	121A8	STD	270	730	335	2233	9.00	7.0			3.90	
															10 FR	2030
															25 FR	1725
															30 FR	1625
															40 FR	1450
															10 DW	1440
															25 DW	1225
															40 DW	1155
		1030														

STD: Standard - AB: Aramid Belted - SPL: Special

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

Ø 12"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.		km/h / bar	
11.0/65 - 12	TT	8	-	101 A8	114 A8	STD	273	700	321	2072	9.00	-		km/h / bar	2.90	
														10 FR	1650	
														25 FR	1405	
														30 FR	1320	
														40 FR	1180	
														10 DW	1155	
														25 DW	980	
														40 DW	825	
11.0/65 - 12	TL	8	-	101 A8	114 A8	STD	273	700	321	2072	9.00	-		km/h / bar	2.90	
														10 FR	1650	
														25 FR	1405	
														30 FR	1320	
														40 FR	1180	
														10 DW	1155	
														25 DW	980	
														40 DW	825	
26 X 12.00 - 12	TL	-	112 A6	-	-	STD	310	648	298	1932	10.50 AT	8.0 AT; 8.5 AT; 9.0 AT	km/h / bar	3.0		
													30	1120		
Ø 15"	5.00 - 15	TT	6	75 A8	88 A8	STD	140	657	308	1957	3.50 D	3.00 D; 4.00 E; 4 J		km/h / bar	3.50	
														10 FR	785	
														25 FR	665	
														30 FR	625	
														40 FR	560	
														10 DW	540	
														25 DW	460	
														40 DW	385	

STD: Standard

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability



Ø 15"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)
					Drive Wheel	Free Rolling						Rec.	Alt.	
5.00 - 15	TT	4	-	67A8	79A8	STD	140	657	308	1957	3.50 D	3.00 D; 4.00 E; 4 J	km/h / bar	2.30
													10 FR	610
													25 FR	520
													30 FR	485
													40 FR	435
													10 DW	425
													25 DW	365
													40 DW	305
5.00 - 15	TL	6	-	75A8	88A8	STD	140	657	308	1957	3.50 D	3.00 D; 4.00 E; 4 J	km/h / bar	3.50
													10 FR	785
													25 FR	665
													30 FR	625
													40 FR	560
													10 DW	540
													25 DW	460
													40 DW	385
7.5L - 15	TT	6	-	97A8	109A8	STD	210	765	354	2280	6 LB	5 K; 5½ J; 5½ K	km/h / bar	3.10
													10 FR	1440
													25 FR	1225
													30 FR	1155
													40 FR	1030
													10 DW	1020
													25 DW	870
													40 DW	730

STD: Standard

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

Ø 15"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)
					Drive Wheel	Free Rolling						Rec.	Alt.	
7.5L - 15	TT	8	-	100A8	113A8	STD	210	765	354	2280	6 LB	5 K; 5½ J; 5½ K	km/h / bar	3.70
													10 FR	1610
													25 FR	1370
													30 FR	1290
													40 FR	1150
													10 DW	1120
													25 DW	950
													40 DW	800
7.5L - 15	TL	8	-	100A8	113A8	STD	210	765	354	2280	6 LB	5 K; 5½ J; 5½ K	km/h / bar	3.70
													10 FR	1610
													25 FR	1370
													30 FR	1290
													40 FR	1150
													10 DW	1120
													25 DW	950
													40 DW	800
7.5L - 15	TL	8	-	100A8	113A8	AB HD	210	765	354	2280	6 LB	5 K; 5½ J; 5½ K	km/h / bar	3.70
													10 FR	1610
													25 FR	1370
													30 FR	1290
													40 FR	1150
													10 DW	1120
													25 DW	950
													40 DW	800

STD: Standard - AB HD: Aramid Belted HD

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability



Ø 15"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
7.5L - 15	TT	8	-	100A8	113A8	HD	210	765	354	2280	6 LB	5 K; 5½ J; 5½ K	3.70		
													10 FR	1610	
													25 FR	1370	
													30 FR	1290	
													40 FR	1150	
													10 DW	1120	
													25 DW	950	
													30 DW	895	
													40 DW	800	
													400/50 - 15	TL	-
10 FR	2030														
25 FR	1725														
30 FR	1625														
40 FR	1450														
10 DW	1440														
25 DW	1225														
30 DW	1155														
40 DW	1030														
Ø 15.3"	10.0/75 - 15.3	TT	8	106A8	119A8	STD	264	785	360	2404	9.00	-	3.10		
													10 FR	1905	
													25 FR	1620	
													30 FR	1525	
													40 FR	1360	
													10 DW	1330	
													25 DW	1130	
													30 DW	1065	
													40 DW	950	

STD: Standard - HD: Heavy Duty

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

Ø 15.3"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar		
10.0/75 - 15.3	TL	8	-	106A8	119A8	STD	264	785	360	2404	9.00	-			3.10	
															10 FR	1905
															25 FR	1620
															30 FR	1525
															40 FR	1360
															10 DW	1330
															25 DW	1130
															40 DW	1065
10.0/75 - 15.3	TL	10	-	111A8	123A8	STD	264	785	360	2404	9.00	-			3.90	
															10 FR	2170
															25 FR	1845
															30 FR	1735
															40 FR	1550
															10 DW	1525
															25 DW	1295
															40 DW	1220
10.0/75 - 15.3	TL	14	-	118A8	130A8	STD	264	785	360	2404	9.00	-			5.50	
															10 FR	2660
															25 FR	2260
															30 FR	2130
															40 FR	1900
															10 DW	1850
															25 DW	1570
															40 DW	1480

STD: Standard

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

Ø 15.3"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar		
10.0/75 - 15.3	TT	18	-	123A8	135A8	STD	264	785	360	2404	9.00	-			7.10	
															25 FR	2595
															30 FR	2440
															40 FR	2180
															10 DW	2170
															25 DW	1845
															30 DW	1735
															40 DW	1550
10.0/75 - 15.3	TL	18	-	123A8	135A8	STD	264	785	360	2404	9.00	-			7.10	
															10 FR	3050
															25 FR	2595
															30 FR	2440
															40 FR	2180
															10 DW	2170
															25 DW	1845
															30 DW	1735
40 DW	1550															
10.0/75 - 15.3	TL	8	-	106A8	119A8	IND	264	785	360	2404	9.00	-			3.10	
															10 FR	1905
															25 FR	1620
															30 FR	1525
															40 FR	1360
															10 DW	1330
															25 DW	1130
															30 DW	1065
40 DW	950															

STD: Standard - IND: Industrial

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability



Ø 15.3"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	2.70
11.5/80 - 15.3	TT	8	-	114A8	126A8	STD	290	867	380	2540	9.00	-	10 FR	2380
													25 FR	2025
													30 FR	1905
													40 FR	1700
													10 DW	1650
													25 DW	1405
													30 DW	1320
													40 DW	1180
11.5/80 - 15.3	TL	8	-	114A8	126A8	STD	290	867	380	2540	9.00	-	10 FR	2380
													25 FR	2025
													30 FR	1905
													40 FR	1700
													10 DW	1650
													25 DW	1405
													30 DW	1320
													40 DW	1180
11.5/80 - 15.3	TL	10	-	119A8	131A8	STD	290	867	380	2540	9.00	-	10 FR	2730
													25 FR	2320
													30 FR	2185
													40 FR	1950
													10 DW	1905
													25 DW	1620
													30 DW	1525
													40 DW	1360

STD: Standard

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

Ø 15.3"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar		
11.5/80 - 15.3	TT	12	-	123A8	135A8	STD	290	867	380	2540	9.00	-			4.10	
															10 FR	3050
															25 FR	2595
															30 FR	2440
															40 FR	2180
															10 DW	2170
															25 DW	1845
															30 DW	1735
40 DW	1550															
11.5/80 - 15.3	TL	12	-	123A8	135A8	STD	290	867	380	2540	9.00	-			4.10	
															10 FR	3050
															25 FR	2595
															30 FR	2440
															40 FR	2180
															10 DW	2170
															25 DW	1845
															30 DW	1735
40 DW	1550															
11.5/80 - 15.3	TT	14	-	126A8	139A8	STD	290	867	380	2540	9.00	-			4.80	
															10 FR	3400
															25 FR	2890
															30 FR	2720
															40 FR	2430
															10 DW	2380
															25 DW	2025
															30 DW	1905
40 DW	1700															

STD: Standard

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

Ø 15.3"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar		
11.5/80 - 15.3	TL	14	-	126A8	139A8	STD	290	867	380	2540	9.00	-			4.80	
															10 FR	3400
															25 FR	2890
															30 FR	2720
															40 FR	2430
															10 DW	2380
															25 DW	2025
															30 DW	1905
40 DW	1700															
11.5/80 - 15.3	TL	12	-	123A8	135A8	SR	290	867	380	2540	9.00	-			4.10	
															10 FR	3050
															25 FR	2595
															30 FR	2440
															40 FR	2180
															10 DW	2170
															25 DW	1845
															30 DW	1735
40 DW	1550															
27 X 10 - 15.3	TL	8	-	95A8	107A8	STD	260	695	317	2071	9.00	-			3.10	
															10 FR	1365
															25 FR	1160
															30 FR	1090
															40 FR	975
															10 DW	965
															25 DW	820
															30 DW	775
40 DW	690															

STD: Standard - SR: Stubble Resistant

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability



Ø 15.3"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.		
27 X 10 - 15.3	TT	8	-	95A8	107A8	STD	260	695	317	2071	9.00	-	km/h / bar	3.10	
													10 FR	1365	
													25 FR	1160	
													30 FR	1090	
													40 FR	975	
													10 DW	965	
													25 DW	820	
													40 DW	690	
Ø 16"	4.00 - 16	TT	4	-	66A8	78A8	STD	110	628	296	1935	3.00 D	2.50 C	km/h / bar	2.80
														10 FR	595
														25 FR	505
														30 FR	475
														40 FR	425
														10 DW	420
														25 DW	355
														40 DW	300
6.00 - 16	TT	6	-	83A8	95A8	STD	164	735	343	2190	4.00 E	4.50 E; 4½ K	km/h / bar	2.80	
													10 FR	965	
													25 FR	820	
													30 FR	775	
													40 FR	690	
													10 DW	680	
													25 DW	575	
													40 DW	485	

STD: Standard

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

Ø 16"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)												
					Drive Wheel	Free Rolling						Rec.	Alt.													
					km/h / bar																					
6.00 - 16	TT	6	-	83A8	95A8	HD	164	735	343	2190	4.00 E	4.50 E; 4½ K	2.80													
													km/h / bar													
													10 FR	965												
													25 FR	820												
													30 FR	775												
													40 FR	690												
													10 DW	680												
													25 DW	575												
30 DW	545																									
40 DW	485																									
6.00 - 16	TT	8	-	91A8	103A8	HD	164	735	343	2190	4.00 E	4.50 E; 4½ K	4.00													
													km/h / bar													
													10 FR	1225												
													25 FR	1040												
													30 FR	980												
													40 FR	875												
													10 DW	860												
													25 DW	730												
30 DW	690																									
40 DW	615																									
7.50 - 16	TL	8	-	99A8	112A8	STD	209	803	372	2475	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	3.20													
													km/h / bar													
													10 FR	1570												
													25 FR	1335												
													30 FR	1255												
													40 FR	1120												
													10 DW	1085												
													25 DW	920												
30 DW	870																									
40 DW	775																									

STD: Standard - HD: Heavy Duty

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability



Ø 16"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	2.30	
7.50 - 16	TT	6	-	92A8	104A8	STD	209	803	372	2475	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F			10 FR	1260
															25 FR	1070
															30 FR	1010
															40 FR	900
															10 DW	880
															25 DW	750
															30 DW	705
															40 DW	630
7.50 - 16	TT	8	-	99A8	112A8	STD	209	803	372	2475	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F			10 FR	1570
															25 FR	1335
															30 FR	1255
															40 FR	1120
															10 DW	1085
															25 DW	920
															30 DW	870
															40 DW	775
7.50 - 16	TT	8	-	99A8	112A8	HD	209	803	372	2475	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F			10 FR	1570
															25 FR	1335
															30 FR	1255
															40 FR	1120
															10 DW	1085
															25 DW	920
															30 DW	870
															40 DW	775

STD: Standard - HD: Heavy Duty

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability



Ø 16"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.		
9.0/70 - 16 (230/70 - 16)	TL	10	-	106A8	119A8	STD	222	760	355	2285	W 7	-	km/h / bar	4.40	
													10 FR	1905	
													25 FR	1620	
													30 FR	1525	
													40 FR	1360	
													10 DW	1330	
													25 DW	1130	
													40 DW	950	
270/75 - 16 (10.0/75 - 16)	TL	-	-	111A8	123A8	STD	250	810	-	-	9.00	-	km/h / bar	3.90	
													10 FR	2170	
													25 FR	1845	
													30 FR	1735	
													40 FR	1550	
													10 DW	1525	
													25 DW	1295	
													40 DW	1090	
Ø 17"	15.0/55 - 17	TL	10	-	122A8	134A8	STD	380	890	395	2608	13.00	13	km/h / bar	2.60
														10 FR	2970
														25 FR	2525
														30 FR	2375
														40 FR	2120
														10 DW	2100
														25 DW	1785
														40 DW	1500

STD: Standard

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

Ø 17"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
15.0/55 - 17	TL	14	-	128 A8	141 A8	STD	380	890	395	2608	13.00	13	3.60		
													10 FR	3605	
													25 FR	3065	
													30 FR	2885	
													40 FR	2575	
													10 DW	2520	
													25 DW	2140	
													40 DW	1800	
19.0/45 - 17	TL	14	-	131 A8	144 A8	STD	465	865	389	2578	16.00	-	2.80		
													10 FR	3920	
													25 FR	3330	
													30 FR	3135	
													40 FR	2800	
													10 DW	2730	
													25 DW	2320	
													40 DW	1950	
19.0/45 - 17	TL	16	-	134 A8	147 A8	STD	465	865	389	2578	16.00	-	3.10		
													10 FR	4305	
													25 FR	3660	
													30 FR	3445	
													40 FR	3075	
													10 DW	2970	
													25 DW	2525	
													40 DW	2120	

STD: Standard

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

Ø 17"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)
					Drive Wheel	Free Rolling						Rec.	Alt.	
420/55 - 17	TL	14	-	129A8	142A8	STD	430	910	407	2712	13.00	-	km/h / bar	3.00
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													40 DW	1850
420/55 - 17	TL	16	-	133A8	145A8	STD	430	910	407	2712	13.00	-	km/h / bar	3.50
													10 FR	4060
													25 FR	3450
													30 FR	3250
													40 FR	2900
													10 DW	2885
													25 DW	2450
													40 DW	2060
Ø 18"	7.50 - 18	TT	6	94A8	106A8	STD	209	854	407	2649	5.50 F	4.50 E; 6.00 F; 5.00 F	km/h / bar	2.30
													10 FR	1330
													25 FR	1130
													30 FR	1065
													40 FR	950
													10 DW	940
													25 DW	795
													40 DW	670

STD: Standard

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability



Ø 18"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
7.50 - 18	TT	8	-	101 A8	114 A8	STD	209	854	407	2649	5.50 F	4.50 E; 6.00 F; 5.00 F	3.10		
													10 FR	1650	
													25 FR	1405	
													30 FR	1320	
													40 FR	1180	
													10 DW	1155	
													25 DW	980	
													40 DW	825	
7.50 - 18	TT	12	-	111 A8	122 A8	STD	209	854	407	2649	5.50 F	4.50 E; 6.00 F; 5.00 F	5.10		
													10 FR	2100	
													25 FR	1785	
													30 FR	1680	
													40 FR	1500	
													10 DW	1525	
													25 DW	1295	
													40 DW	1090	
10.5/80 - 18	TL	10	-	119 A8	131 A8	STD	274	907	427	2790	W 9	9;W 8	3.70		
													10 FR	2730	
													25 FR	2320	
													30 FR	2185	
													40 FR	1950	
													10 DW	1905	
													25 DW	1620	
													40 DW	1360	

STD: Standard

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability



Ø 18"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.		
					km/h / bar										
12.5/80 - 18	TL	12	-	129A8	142A8	STD	308	987	438	2892	W 9	9;11	km/h / bar	3.70	
													10 FR	3710	
													25 FR	3155	
													30 FR	2970	
													40 FR	2650	
													10 DW	2590	
													25 DW	2200	
													30 DW	2070	
40 DW	1850														
12.5/80 - 18	TL	12	-	129A8	142A8	SPL	308	987	438	2892	W 9	9;11	km/h / bar	3.70	
													10 FR	3710	
													25 FR	3155	
													30 FR	2970	
													40 FR	2650	
													10 DW	2590	
													25 DW	2200	
													30 DW	2070	
40 DW	1850														
12.5/80 - 18	TL	16	-	135A8	148A8	STD	308	987	438	2892	W 9	9;11	km/h / bar	4.90	
													10 FR	4410	
													25 FR	3750	
													30 FR	3530	
													40 FR	3150	
													10 DW	3050	
													25 DW	2595	
													30 DW	2440	
40 DW	2180														

STD: Standard - SPL: Special

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

Ø 18"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)
					Drive Wheel	Free Rolling						Rec.	Alt.	
12.5/80 - 18	TL	18	-	138A8	150A8	STD	308	987	438	2892	W 9	9; 11	km/h / bar	5.50
													10 FR	4690
													25 FR	3985
													30 FR	3750
													40 FR	3350
													10 DW	3305
													25 DW	2810
													40 DW	2360
Ø 20"	7.50 - 20	TT	8	103A8	116A8	STD	209	904	422	2695	5.50 F	4.50 E; 6.00 F; 5.00 F	km/h / bar	3.20
													10 FR	1750
													25 FR	1490
													30 FR	1400
													40 FR	1250
													10 DW	1225
													25 DW	1040
													30 DW	980
40 DW	875													
16.0/70 - 20	TL	10	-	135A8	147A8	STD	418	1097	487	3214	13	12 SDC; 14; 13 SDC	km/h / bar	2.50
													10 FR	4305
													25 FR	3660
													30 FR	3445
													40 FR	3075
													10 DW	3050
													25 DW	2595
													30 DW	2440
40 DW	2180													

STD: Standard

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

Ø 20"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
16.0/70 - 20	TL	12	-	139A8	151A8	STD	418	1097	487	3214	13	12 SDC; 14; 13 SDC	3.00		
													10 FR	4830	
													25 FR	4105	
													30 FR	3865	
													40 FR	3450	
													10 DW	3400	
													25 DW	2890	
													40 DW	2430	
16.0/70 - 20	TL	14	-	142A8	154A8	STD	418	1097	487	3214	13	12 SDC; 14; 13 SDC	3.50		
													10 FR	5250	
													25 FR	4465	
													30 FR	4200	
													40 FR	3750	
													10 DW	3710	
													25 DW	3155	
													40 DW	2650	
16.0/70 - 20	TL	16	-	144A8	156A8	STD	418	1097	487	3214	13	12 SDC; 14; 13 SDC	4.00		
													10 FR	5600	
													25 FR	4760	
													30 FR	4480	
													40 FR	4000	
													10 DW	3920	
													25 DW	3330	
													40 DW	2800	
400/70 - 20	TL	-	149A8	-	-	IND	408	1097	487	3214	13	12 SDC; 14; 13 SDC	4.00		
													10	4060	
													25	3445	
													30	3380	
													40	3250	

STD: Standard - IND: Industrial

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

Ø 24"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
15.5/80 - 24	TL	10	-	142A8	154A8	STD	384	1262	570	3875	W 12	W 13; W 14 L	2.50		
													10 FR	5250	
													25 FR	4465	
													30 FR	4200	
													40 FR	3750	
													10 DW	3710	
													25 DW	3155	
													40 DW	2650	
15.5/80 - 24	TL	12	-	145A8	157A8	STD	384	1262	570	3875	W 12	W 13; W 14 L	3.00		
													10 FR	5775	
													25 FR	4910	
													30 FR	4620	
													40 FR	4125	
													10 DW	4060	
													25 DW	3450	
													40 DW	2900	
15.5/80 - 24	TL	14	-	148A8	160A8	STD	384	1262	570	3875	W 12	W 13; W 14 L	3.50		
													10 FR	6300	
													25 FR	5355	
													30 FR	5040	
													40 FR	4500	
													10 DW	4410	
													25 DW	3750	
													40 DW	3150	

STD: Standard

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability



Ø 24"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
15.5/80 - 24	TL	14	-	148A8	160A8	SPL	384	1262	570	3875	W 12	W 13; W 14 L	3.50		
													10 FR	6300	
													25 FR	5355	
													30 FR	5040	
													40 FR	4500	
													10 DW	4410	
													25 DW	3750	
													40 DW	3150	
15.5/80 - 24	TL	16	-	151A8	163A8	STD	384	1262	570	3875	W 12	W 13; W 14 L	4.00		
													10 FR	6825	
													25 FR	5800	
													30 FR	5460	
													40 FR	4875	
													10 DW	4830	
													25 DW	4105	
													40 DW	3450	
16.5/85 - 24	TL	10	-	146A8	158A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L	2.40		
													10 FR	5950	
													25 FR	5060	
													30 FR	4760	
													40 FR	4250	
													10 DW	4200	
													25 DW	3570	
													40 DW	3000	

STD: Standard - SPL: Special

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability



Ø 24"	Tire size	TYPE	PR	LI/SS	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
16.5/85 - 24	TL	12	-	151 A8	163 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L	2.80		
													10 FR	6825	
													25 FR	5800	
													30 FR	5460	
													40 FR	4875	
													10 DW	4830	
													25 DW	4105	
													30 DW	3865	
													40 DW	3450	
													16.5/85 - 24	TL	16
10 FR	7840														
25 FR	6665														
30 FR	6270														
40 FR	5600														
10 DW	5425														
25 DW	4610														
30 DW	4340														
40 DW	3875														
16.5/85 - 24	TT	16	-	155 A8	168 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L			
													10 FR	7840	
													25 FR	6665	
													30 FR	6270	
													40 FR	5600	
													10 DW	5425	
													25 DW	4610	
													30 DW	4340	
													40 DW	3875	
													400/80 - 24	TL	-
10	5000														
25	4240														
30	4160														
40	4000														
400/80 - 24	TL	-	162 A8	-	-	IND	394	1262	566	3655	W 13	W 12 L; W 14 L	5.00		
													10	5940	
													25	5035	
													30	4940	
													40	4750	

STD: Standard - IND: Industrial

Technology



Heavy Duty



Aramid Belted



Reinforced Carcass

Performance



Self-Cleaning



Traction



Cut and Chip Resistance



Durability



Stability

CON STAR



CON STAR is particularly suitable for compact loaders and telehandlers in agro-industrial, lifting and loading applications. It features great traction along with excellent vertical and horizontal stability. CON STAR has been made of a cut-and-chip-resistant compound contributing to an extended tire life-cycle.

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
Ø 18"	340/80 - 18 (12.5/80 - 18)	TL	-	143 A8	IND	350	1015	465	3040	11	12; 11 SDC; 12 SDC; W 10; W 11	km/h / bar	4.00
												40	2725
Ø 20"	340/80 - 20 (12.5/80 - 20)	TL	-	144 A8	IND	350	1065	491	3272	11	12; 11 SDC; 12 SDC; W 10; W 11	km/h / bar	4.00
												40	2800
Ø 20"	380/75 - 20 (14.5 - 20)	TL	-	148 A8	IND	385	1080	500	3273	W 12	W 11; 12 SDC; 12; W 13; 13 SDC; 13	km/h / bar	4.00
												40	3150
Ø 20"	400/70 - 20 (16.0/70 - 20)	TL	16	149 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14	km/h / bar	4.00
												40	3250
Ø 20"	400/70 - 20 (16.0/70 - 20)	TL	-	156 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14	km/h / bar	5.00
												40	4000
Ø 24"	400/70 - 24 (16.0/70 - 24)	TL	-	158 A8	IND	395	1175	544	3556	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L	km/h / bar	5.00
												40	4250
Ø 24"	400/80 - 24 (15.5/80 - 24)	TL	20	162 A8	IND	405	1250	570	3781	DW 13	DW 12; DW 13 L; DW 14 L	km/h / bar	5.00
												40	4750

IND: Industrial

Technology



Performance



Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
440/80 - 24 (17.0/80 - 24)	TL	22	168A8	IND	455	1315	610	3986	DW 14 L	DW 13 ; DW 13 L ; DW 15 L	40	5600	
											4.00	5.00	
460/70 - 24 (17.5L - 24)	TL	-	159A8	IND	460	1250	562	3784	DW 15 L	DW 14 L ; DW 16 L	40	4375	
											4.00	4.00	
500/70 - 24 (19.5L - 24)	TL	-	164A8	IND	505	1300	579	3926	DW 16 L	DW 15 L ; DW 18 L	40	5000	
											4.00	4.00	
Ø 26"	480/80 - 26 (18.4 - 26)	TL	-	160A8	IND	490	1410	643	4272	DW 15 L	DW 16 L	40	4500
												3.20	3.20
Ø 28"	440/80 - 28 (16.9 - 28)	TL	-	156A8	IND	450	1420	632	4299	DW 14 L	DW 13 ; DW 13 L ; DW 15 L	40	4000
												3.20	3.20

Technology



Performance



IND: Industrial



GRIP STAR



GRIP STAR is an agro-industrial tire for loading applications with telehandlers. It shows excellent traction and self-cleaning properties. Besides, it is an all-season tire particularly suitable for operations on muddy ground. GRIP STAR is also available in a "special" version that features extra cut and chip resistance.

Ø 24"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive wheel	Free rolling						Rec.	Alt.	km/h / bar	4.00
15.5/80 - 24	TL	16	151 A6	163 A6	STD	392	1270	569	3683	W 12	W 13; W 14 L	30 FR LLV	4875	
												30 DW LLV	3450	
												km/h / bar	4.00	
15.5/80 - 24	TT	16	151 A6	163 A6	STD	392	1270	569	3683	W 12	W 13; W 14 L	30 FR LLV	4875	
												30 DW LLV	3450	
												km/h / bar	4.00	
15.5/80 - 24	TL	16	151 A6	163 A6	SPL	392	1270	569	3683	W 12	W 13; W 14 L	30 FR LLV	4875	
												30 DW LLV	3450	
												km/h / bar	4.00	

Performance






STD: Standard - SPL: Special



LIFT STAR PLUS



LIFT STAR is a bias-ply tire specially designed for telehandlers operating in demanding construction operations and other severe applications. Its low-profile sidewall ensures excellent stability in high-lifting operations whereas its non-directional tread design allows for greater mounting versatility. In addition, the specially designed sidewall provides added cut-and-puncture protection.

Ø 28"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.			
												km/h / bar	3.25	5.00
370/75 - 28	TL	14	-	STD	365	1270	583	3851	11.00	-		50	3250	-
												10	-	5450
												km/h / bar	3.50	5.00
400/75 - 28	TL	16	-	STD	400	1318	592	3944	12.00	GR	-	50	3875	-
												10	-	6300
												km/h / bar	3.50	5.00

STD: Standard

Performance

Heavy Duty

Durability

Stability

Cut and Chip Resistance


MP 567



MP 567 is an agro-industrial tire suitable for field and road transport and municipality/maintenance operations. It is the perfect tire for telehandlers and implement machinery. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties. This tire ensures a comfortable driving experience, together with a longer service life.

Ø 15"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive wheel	Free rolling						Rec.	Alt.	km/h / bar	4.10
Ø 15.3"	11.5/80 - 15	TL	12	123 A8	135 A8	IMP	290	875	-	-	8 LB	-	40 FR	2180
													40 DW	1550
													km/h / bar	3.90
	10.0/75 - 15.3	TL	10	111 A8	123 A8	IMP	258	774	365	5401	9.0	-	40 FR	1550
													40 DW	1090
													km/h / bar	4.70
	10.0/75 - 15.3	TL	12	114 A8	126 A8	IMP	258	774	365	2401	9.0	-	40 FR	1700
													40 DW	1180
													km/h / bar	5.50
10.0/75 - 15.3	TL	14	118 A8	130 A8	IMP	258	774	365	2401	9.0	-	40 FR	1900	
												40 DW	1320	
												km/h / bar	7.10	
10.0/75 - 15.3	TL	18	123 A8	135 A8	IMP	258	774	365	2401	9.0	-	40 FR	2180	
												40 DW	1550	
												km/h / bar	3.40	
11.5/80 - 15.3	TL	10	119 A8	131 A8	IMP	292	868	393	2578	9.0	-	40 FR	1950	
												40 DW	1360	
												km/h / bar	4.75	
11.5/80 - 15.3	TL	14	126 A8	139 A8	IMP	292	868	393	2578	9.0	-	40 FR	2430	
												40 DW	1700	
												km/h / bar	6.00	
11.5/80 - 15.3	TL	18	130 A8	143 A8	IMP	292	868	393	2578	9.0	-	40 FR	2725	
												40 DW	1900	
												km/h / bar		

Performance



Comfort



Durability



Self-Cleaning



Traction

IMP: Implement

Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive wheel	Free rolling						Rec.	Alt.	km/h / bar	
10.5 - 18	TT	10	-	-	STD	273	905	415	2768	9	9 SDC	90	1700	
												40	1955	
												km/h / bar	3.75	
10.5 - 18	TL	10	-	-	STD	273	905	415	2768	9	9 SDC	90	1700	
												40	1955	
												km/h / bar	3.75	
10.5 - 18	TL	12	-	-	STD	273	905	415	2768	9	9 SDC	90	1900	
												40	2190	
												km/h / bar	4.50	
10.5 - 18	TL	12	-	-	SPL	273	905	415	2768	9	9 SDC	90	1900	
												40	2190	
												km/h / bar	4.50	
12.0/75 - 18 (300/75 - 18)	TL	12	126 A8	139 A8	IMP	298	915	426	2723	W 9	9;11	40 FR	2430	
												40 DW	1700	
												km/h / bar	4.00	
12.5 - 18	TT	10	-	-	STD	325	990	450	2940	11	12 SDC	90	1800	
												40	2070	
												km/h / bar	3.00	
12.5 - 18	TL	10	-	-	STD	325	990	450	2940	11	12 SDC	90	1800	
												40	2070	
												km/h / bar	3.00	
12.5 - 18	TT	12	-	-	STD	325	990	450	2940	11	12 SDC	90	1950	
												40	2245	
												km/h / bar	3.50	

STD: Standard - IMP: Implement - SPL: Special

Performance



Comfort



Durability



Self-Cleaning



Traction

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
Ø 18"	12.5 - 18	TL	12	-	STD	325	990	466	3024	11	12 SDC	3.50	
												90	1950
												40	2245
	12.5 - 18	TL	16	-	STD	325	990	450	2940	11	12 SDC	4.50	
												90	2250
												40	2585
Ø 19.5"	18 - 19.5 IND	TL	16	160 B / 162 A8	STD	460	1104	498	3280	14.00	-	6.00	
												50	4500
												40	4700
	18 - 19.5 IND	TL	18	165 B / 167 A8	STD	460	1104	498	3280	14.00	-	7.25	
												50	5150
												40	5460
Ø 20"	10.5 - 20	TT	10	-	STD	270	955	445	2880	9	9 SDC	3.75	
												90	1800
												40	2070
	10.5 - 20	TL	10	-	STD	270	955	445	2880	9	9 SDC	3.75	
												90	1800
												40	2070
	12.5 - 20	TT	10	-	STD	325	1040	490	3142	11.0	12 SDC	3.00	
												90	1850
												40	2130
	12.5 - 20	TL	10	-	STD	325	1040	490	3142	11.0	12 SDC	3.00	
												90	1850
												40	2130

STD: Standard

Performance



Comfort



Durability



Self-Cleaning



Traction

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
12.5 - 20	TT	12	-	STD	325	1040	490	3142	11.0	12 SDC		km/h / bar	3.50	
												90	2000	
												40	2300	
12.5 - 20	TL	12	-	STD	325	1040	490	3142	11.0	12 SDC		km/h / bar	3.50	
												90	2000	
												40	2300	
12.5 - 20	TL	12	-	HD	325	1040	490	3142	11.0	12 SDC		km/h / bar	3.50	
												90	2000	
												40	2300	
12.5 - 20	TL	16	-	STD	325	1040	490	3142	11.0	12 SDC		km/h / bar	4.50	
												90	2300	
												40	2750	
14.5 - 20	TL	10	-	STD	360	1116	495	3315	11	12 SDC		km/h / bar	2.50	
												90	2000	
												40	2300	
14.5 - 20	TL	12	-	STD	360	1116	495	3315	11	12 SDC		km/h / bar	3.00	
												90	2240	
												40	2580	
14.5 - 20	TL	14	-	STD	360	1116	495	3315	11	12 SDC		km/h / bar	3.50	
												90	2430	
												40	2790	
14.5 - 20	TL	16	-	STD	360	1116	495	3315	11	12 SDC		km/h / bar	4.00	
												90	2575	
												40	2960	
14.5 - 20	TL	18	-	STD	360	1116	495	3315	11	12 SDC		km/h / bar	4.50	
												90	2725	
												40	3135	

Performance



Comfort



Durability




Self-Cleaning



Traction

STD: Standard - HD: Heavy Duty

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
14.5 - 20	TL	14	-	HD	360	1116	495	3315	11	12 SDC	3.50	2430	
											90	2790	
											40		
16.0/70 - 20 (405/70 - 20)	TL	14	-	STD	405	1128	490	3350	13 SDC	12	3.50	2900	
											90	3340	
											40		
16.0/70 - 20 (405/70 - 20)	TT	14	-	STD	405	1128	490	3350	13 SDC	12	3.50	2900	
											90	3340	
											40		

STD: Standard - HD: Heavy Duty

Performance



Comfort



Durability



Self-Cleaning



Traction



MP 590



MP 590 is an agro-industrial tire suitable for loading operations with telehandlers and forklifts. This tire provides good traction and excellent stability as well as increased durability.

Ø 22.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
18 - 22.5 (445/65 - 22.5)	TL	16	-	STD	480	1190	530	3534	14.0	-	km/h / bar	5.50	
											40 DW	4875	
											30 DW	5450	
18 - 22.5 (445/65 - 22.5)	TL	20	-	STD	480	1190	530	3534	14.0	-	km/h / bar	7.50	
											40 DW	5800	
											30 DW	6500	

STD: Standard

Performance



Stability



Traction



Durability





Bias

MP 600



MP 600 is an agro-industrial tire, suitable for municipality/maintenance operations with telehandlers and implement machinery, providing a comfortable driving experience. This tire provides good traction and excellent self-cleaning properties along with an extended product life-cycle.

Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
10.5 - 18	TL	10	-	-	STD	272	920	420	2740	9	9 SDC	km/h / bar	3.75	
												40 DW	1950	
												50 DW	1900	
12.5 - 18	TL	10	-	-	STD	308	990	450	2950	11	12 SDC	km/h / bar	3.00	
												40 DW	2060	
												50 DW	2000	
12.5 - 18	TL	12	-	-	STD	308	990	450	2950	11	12 SDC	km/h / bar	3.50	
												40 DW	2300	
												50 DW	2240	
Ø 20"	400/70 - 20 (16.0/70 - 20)	TL	14	-	-	STD	405	1085	-	-	13 SDC	12	km/h / bar	4.00
													40 DW	3550
													50 DW	3250

STD: Standard

Performance



Durability



Traction




Self-Cleaning



Comfort



Ø 24"	Tire size	TYPE	PR	LI/SS Drive wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
												km/h / bar	
400/70 - 24 (16.0/70 - 24)	TL	14	-	-	STD	405	1185	545	3530	13 SDC	12	3.50	
												40 DW	3650
												50 DW	3550
400/70 - 24 (16.0/70 - 24)	TL	10	-	-	STD	405	1185	545	3530	13 SDC	12	2.50	
												40 DW	2975
												50 DW	2900
400/70 - 24 (16.0/70 - 24)	TL	18	158 A8	-	STD	405	1185	545	3530	13 SDC	12	4.50	
												40 DW	4250
												50 DW	4125
400/70 - 24 (16.0/70 - 24)	TL	14	-	-	SPL	405	1185	545	3530	13 SDC	12	3.50	
												40 DW	3650
												50 DW	3550

STD: Standard - SPL: Special

Performance



Durability



Traction



Self-Cleaning



Comfort



TR 461



TR 461 is a BKT pattern suitable for municipality and maintenance applications with tractors as well as for loading operations with telehandlers. The sidewall protection features particular resistance against cuts and bruises providing a longer life even on hard surfaces in addition to excellent stability.

Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
				Drive Wheel	Free Rolling						Rec.	Alt.			
12.5/80 - 18	TL	12	-	129A8	142A8	STD	305	987	435	2902	W 9	11	km/h / bar	3.70	
													10 FR	3710	
													25 FR	3155	
													30 FR	2970	
													40 FR	2650	
													10 DW	2590	
													25 DW	2200	
													30 DW	2070	
													40 DW	1850	
													12.5/80 - 18	TL	18
10 FR	4690														
25 FR	3985														
30 FR	3750														
40 FR	3350														
10 DW	3305														
25 DW	2810														
30 DW	2645														
40 DW	2360														
Ø 24"	16.9 - 24	TL	14	151A8	-	-	STD	440	1280	566	3763	DW 15 L			
													40	3450	
	19.5L - 24	TL	12	151A8	-	-	STD	490	1310	578	3851	DW 16 L	-	km/h / bar	2.30
														40	3450
19.5L - 24	TL	14	154A8	-	-	STD	490	1310	578	3851	DW 16 L	-	km/h / bar	2.60	
													40	3750	
21L - 24	TL	14	157A8	-	-	STD	540	1385	607	4072	DW 18 L	-	km/h / bar	2.50	
													40	4125	

STD: Standard

Performance



Ø 28"	Tire size	TYPE	PR	LI/SS	LI/SS			S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
					Drive Wheel	Free Rolling	Version					Rec.	Alt.		
															km/h / bar
16.9 - 28	TL	14	154 A8	-	-	STD	440	1390	620	4087	DW 15 L	DW 14 L	40	2.90	3750
Ø 34"	620/60 B 34	TL	-	175 A8	-	-	HD	615	1629	750	4930	DW 20 B	-	4.00	
														40	6900

STD: Standard - HD: Heavy Duty

Performance



EM 936



EM 936 has been specially designed for excavators and telehandlers in digging and loading operations. Besides, one size is particularly suitable for graders and loaders in grading, loading and transport applications. EM 936 features outstanding riding comfort and enhanced self-cleaning properties. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions. Its "special" version is made of a special compound.

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)			
										Rec.	Alt.	km/h / bar	2.50		
Ø 15"	28X9.00-15	TL	6	102 A6	STD	236	750	-	-	7.00 I	6.5 K	30	850		
Ø 20"	10.00 - 20	TT	16	146 B	STD	275	1050	498	3180	7.5	7.0; 8.0	50	7.50		
													3000		
Ø 20"	10.00 - 20	TT	16	146 B	SPL	275	1050	498	3180	7.5	7.0; 8.0	50	7.50		
													3000		
Ø 20"	11.00 - 20	TT	16	149 B	STD	300	1110	508	3302	8.0	7.5; 8.5	50	7.20		
													3250		
Ø 20"	12.5 - 20	TT	12	-	STD	330	1035	464	3210	11.0	-	40	3.50		
													40 FR	3350	
													40 DW	2300	
Ø 20"	16.0/70 - 20 (400/70-20)	TL	14	149 B/166 A2	STD	405	1090	480	3295	13 SDC	13	40	3.50		
													50	3250	4.50
													10	-	5300
Ø 20"	16.0/70 - 20 (400/70-20)	TT	14	149 B/166 A2	SPL	405	1090	480	3295	13 SDC	13	40	3.50		
													50	3250	4.50
													10	-	5300
Ø 20"	16.0/70 - 20 (400/70-20)	TL	14	149 B/166 A2	SPL	405	1090	480	3295	13 SDC	13	40	3.50		
													50	3250	4.50
													10	-	5300

Performance



Comfort



Handling & Comfort



Heavy Duty



Self-Cleaning



Traction

STD: Standard - SPL: Special



Ø 20"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)			
										Rec.	Alt.				
												km/h / bar	4.00	5.00	
Ø 20"	16.0/70 - 20 (400/70-20)	TL	16	152 B/ 168 A2	SPL	405	1090	480	3295	13 SDC	13	50	3550	-	
												10	-	5600	
												km/h / bar	6.75		
												50	2060		
Ø 20"	8.25 - 20	TT	14	133 B	STD	235	980	467	2970	6.5	6.0; 7.0	km/h / bar	7.00		
												50	2500		
Ø 20"	9.00 - 20	TT	14	140 B	STD	256	1012	481	3070	7.0	6.5; 7.5	km/h / bar	7.00		
												50	2500		
Ø 20"	9.00 - 20	TT	14	140 B	SPL	256	1012	481	3070	7.0	6.5; 7.5	km/h / bar	7.00		
												50	2500		
Ø 24"	16.0/70 - 24 (405/70-24)	TL	10	143 B/ 162 A2	STD	404	1170	575	3600	13 SDC	13 (DC)	km/h / bar	2.50	3.20	
												50	2725	-	
												10	-	4750	
												km/h / bar	3.50	4.50	
Ø 24"	16.0/70 - 24 (405/70-24)	TL	14	152 B/ 169 A2	STD	404	1170	575	3600	13 SDC	13 (DC)	50	3550	-	
												10	-	5800	
												km/h / bar	2.50	3.00	
Ø 24"	20 - 24 (22/70-24)	TL	12	158 B/ 173 A2	STD	535	1390	665	4205	16.00 T SDC	-	50	4250	-	
												10	-	6500	
Ø 25"	17.5 - 25	TL	24	-	DB	450	1340	600	4060	14.00/1.5	-	km/h / bar	7.00		
												10	10000		

STD: Standard - SPL: Special - DB: Dual Bead

Performance



Comfort



Handling & Comfort



Heavy Duty



Self-Cleaning



Traction

EM 936 LOADER SPECIAL



EM 936 LOADER SPECIAL has been specially designed for telehandlers in loading applications. It features outstanding riding comfort and enhanced self-cleaning properties. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
										km/h / bar			
	16.0/70 - 20 (405/70 - 20)	TL	14	149 B	STD	405	1090	480	3295	13 SDC	13	3.50	
												50	3250

STD: Standard

Technology



Special Compound

Performance



Comfort



Handling & Comfort



Heavy Duty



Self-Cleaning



Traction



MULTIMAX MP 525

MULTIMAX MP 525 is an All-Steel multi-purpose radial tire designed for telehandlers, compact loaders, and graders in agro-industrial applications. The tire has been specifically developed to carry heavy loads at higher speeds both on and off the road. Indeed, the large non-directional tread design provides exceptional traction on any surface in addition to excellent self-cleaning properties. The strong sidewall ensures exceptional lateral stability in lift mode, making it the ideal choice for agricultural and material handling operations.

MULTIMAX MP 525 is made of a unique, cut- and-chip-resistant tread compound that stands for a longer tire service life thanks to its extraordinary resistance against any kinds of cuts and punctures.

MULTIMAX
RADIAL MPT TIRES

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar	3.75	
													2800	3000
405/70 R 18 (15.5/70 R 18)	TL	-	146 J/ 141 B/ 153 A2	STD	405	1025	462	3122	13	11; 12	100	2800	3000	
											50	2575	-	
											10	3650	-	
Ø 20"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar	6.00	
													3550	5600
405/70 R 20 (16.0/70 R 20)	TL	-	152 J/ 168 A2	STD	405	1076	482	3260	13	12; 13 SDC	100	3550	-	
											10	5600	-	
Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar	4.00	
													3750	3750
										455/70 R 24	TL	-	154 G/ 154 B/ 165 A2	STD
											50	-	3750	
											10	-	5150	

STD: Standard

Performance



Traction



Cut and Chip Resistance



Self-Cleaning



LIGHT TRUCK





LIGHT TRUCK



Bias

LT TR 182



LT TR 182 is suitable for transport operations on light trucks. This high-speed tire is road oriented and significantly reduces fuel consumption. The LT TR 182 tire is also easy to mount.

Ø 14.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
8 - 14.5	TL	12	-	STD	207	710	-	-	6.00 MH	-		km/h / bar	6.90	
												100 LS	1285	
												100 LD	1130	
8 - 14.5	TL	14	-	STD	207	710	-	-	6.00 MH	-		km/h / bar	7.90	
												100 LS	1375	
												100 LD	1210	

STD: Standard

Technology



High Speed

Performance



Durability



Fuel Economy





Road Oriented



TUF LUG



TUF LUG is suitable for trailers and light trucks in transport applications. This tire offers good traction and great durability and ensures a long product life-cycle.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
7.50 - 16	TT	12	-	STD	216	830	-	-	6.00 G	5.50 F	6.20	1400	
											100 LS	1250	
											100 LD		
7.50 - 16	TT	14	-	STD	216	830	-	-	6.00 G	5.50 F	6.90	1500	
											100 LS	1320	
											100 LD		
7.50 - 16	TT	16	-	STD	216	830	-	-	6.00 G	5.50 F	7.60	1600	
											100 LS	1400	
											100 LD		

Performance



STD: Standard





MULTIMAX MP 519

MULTIMAX MP 519 is a particularly suitable tire for light trucks in all transport applications. The steel-belted casing provides excellent stability at high-speed (90 km/h - 60 mph). Thanks to its low rolling resistance, the tire ensures reduced fuel consumption.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
7.50 R 16 LT	TL	6	109/107 G	STD	220	810	377	2449	6.00	5.50 F; 6 L; 7 L		3.5		
												90 LS	1030	
												90 LD	975	
7.50 R 16 LT	TL	8	112/110G	STD	220	810	377	2449	6.00	5.50 F; 6 L; 7 L		3.5		
												90 LS	1120	
												90 LD	1060	

STD: Standard

Technology



High Speed

Performance



Fuel Economy



Stability

LOW PLATFORM





LOW PLATFORM

Bias

IT 400



IT 400 is a road-oriented rib-pattern tire for low platforms in transport applications. The tire is suitable for high-speed applications and provides significant fuel savings.

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)			
										Rec.	Alt.				
												km/h / bar	8.50		7.90
7.50 - 15	TT	16	125/121 J	STD	210	795	356	2361	6.0	5.50 F ; 6.50	100 LS	1650	-	-	
											100 LD	-	-	1450	
											km/h / bar	8.60	7.90	7.20	
8.25 - 15	TT	14	129/125 J	STD	239	846	377	2513	6.50	6.0 ; 7.0	15	2960	-	-	
											30	-	2440	-	
											100 LS	-	1850	-	
											100 LD	-	-	1650	
											km/h / bar	8.60	7.90	7.20	
8.25 - 15	TL	14	129/125 J	STD	239	846	377	2513	6.50	6.0 ; 7.0	15	2960	-	-	
											30	-	2440	-	
											100 LS	-	1850	-	
											100 LD	-	-	1650	
											km/h / bar	8.60	7.90	7.20	
8.25 - 15	TT	16	131/126 J	STD	239	846	377	2513	6.50	6.0 ; 7.0	15	3150	-	-	
											30	-	2600	-	
											100 LS	-	1950	-	
											100 LD	-	-	1700	
											km/h / bar	9.70	9.00	8.30	
10.00 - 15	TT	14	137/133 J	STD	274	925	408	2747	7.5	7.0 ; 8.0	15	3680	-	-	
											30	-	3035	-	
											100 LS	-	2300	-	
											100 LD	-	-	2060	
											km/h / bar	7.60	6.90	6.20	
10.00 - 15	TT	16	141/136 J	STD	274	925	408	2747	7.5	7.0 ; 8.0	15	4120	-	-	
											30	-	3400	-	
											100 LS	-	2575	-	
											100 LD	-	-	2240	
											km/h / bar	8.60	7.90	7.20	
10.00 - 15	TT	18	143/138 J	STD	274	925	408	2747	7.5	7.0 ; 8.0	15	4510	-	-	
											30	-	3640	-	
											100 LS	-	2725	-	
											100 LD	-	-	2360	
											km/h / bar	9.70	8.90	8.10	

STD: Standard

Technology



High Speed

Performance



Fuel Economy



Road Oriented



LOW PLATFORM



Bias

LP 450



LP 450 is a road-oriented tire for low platforms in transport applications. This high-speed tire provides significant fuel savings as well as an extended tire life-cycle.

Ø 14.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
8 - 14.5	TL	12	-	STD	214	710	321	2109	6.00 MH	-	km/h / bar	6.90	
											100 LS	1285	
											100 LD	1130	
9 - 14.5	TL	12	-	STD	246	712	322	2115	7.00 MH	-	km/h / bar	6.90	
											100 LS	1500	
											100 LD	1320	
9 - 14.5	TL	14	-	STD	246	712	322	2115	7.00 MH	-	km/h / bar	7.90	
											100 LS	1625	
											100 LD	1430	

STD: Standard

Technology



High Speed

Performance



Durability



Fuel Economy



Road Oriented





LOW
PLATFORM

 Radial

MULTIMAX SR 261



MULTIMAX SR 261 is an All Steel radial tire with multi-layer steel belts specially designed for Low Platform Trailer, Agri Trailer and Mobile Harbour Crane in transport applications and port operations. Its strong carcass and special tread compound ensure longer tire life. Thanks to its siped tread design, MULTIMAX SR 261 allows for superior traction in all applications. In addition, the unique 5 RIB tread design maximizes ground contact for even tread wear.

Ø 17.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
Ø 17.5"	215/75 R 17.5	TL	-	135/133 J	STD	210	775	356	2371	6.00	6.75	8.50	
												100 LS	2180
												100 LD	2060
Ø 19.5"	285/70 R 19.5	TL	-	150/148 J	STD	280	903	412	2779	8.25	7.50 ; 9.00	9.00	
												100 LS	3350
												100 LD	3150

STD: Standard

Technology



All Steel



Strong Casing

Performance



Durability



Traction

TRAILER



LIFTMAX LM 63



LIFTMAX LM 63 has been specially developed for industrial and logistics operations. The 3-rib tread design provides low rolling resistance with good wet grip and uniform tread wear with better handling. It is an All Steel radial tire with multilayer steel belts offering lower vibration as well as enhanced stability and comfort.

Ø 8"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	10.00
Ø 8"	180/70 R 8 IMP (18 X 7 R 8)	TL	-	120 A8	STD	170	460	-	-	4.33R	-	40	1400
	180/70 R 8 (18 X 7 R 8)	TL	-	125 A5	STD	170	460	-	-	4.33R	-	25	1650
Ø 9"	6.00 R 9	TL	-	121 A5	STD	160	542	-	-	4.00 E	-	km/h / bar	10.00
												25	1450
Ø 10"	6.50 R 10	TL	-	128 A5	STD	176	592	-	-	5.00F	5.50 F	km/h / bar	10.00
												25	1800
Ø 12"	7.00 R 12	TL	-	136 A5	STD	195	675	-	-	5.00 S	-	km/h / bar	10.00
												25	2240
Ø 15"	7.00 R 15	TL	-	143 A5	STD	198	738	-	-	5.50	5.00	km/h / bar	10.00
												25	2725
Ø 15"	8.25 R 15	TL	-	153 A5	STD	240	844	-	-	6.5	7.0	km/h / bar	10.00
												25	3650

Performance


STD: Standard





TRAILER

Radial

PORTMAX PT 93



PORTMAX PT 93 is a terminal tractor and trailer tire, which has been specifically engineered for heavy-duty operations in terminal environments such as ports and logistic hubs. The special antistatic tread compound ensures excellent wear and heat resistance even under the most demanding operating conditions. PORTMAX PT 93 offers excellent handling features and outstanding grip along with enhanced durability.

PORTMAX
RADIAL PORT TIRES

Ø 22.5"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
280/75 R 22.5	TL	-	168 A8	IND	282	998	-	-	8.25	9.00	10.00	5600	
											40	5600	
310/80 R 22.5	TL	-	175 A8	IND	308	1070	-	-	9.00	-	10.00	6900	
											40	6900	
315/60 R 22.5	TL	-	170 A8	IND	307	965	-	-	9.75	9.00	10.00	6000	
											40	6000	

IND: Industrial

Technologies



Special Antistatic Compound

Performance



Durability



Comfort





Heat Resistance



BK 826



BK 826 has been specially designed for trailers in haulage applications. It is a bias tire featuring high load capacity thanks to its reinforced carcass. BK 826 is also available as "industrial" version that shows particular cut and chip resistance and is also suitable for backhoe loaders.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
8.25 - 16	TT	14	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	6.90	
											100 LS	1745	
											100 LD	1650	
8.25 - 16	TT	16	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.60	
											100 LS	1850	
											100 LD	1750	
8.25 - 16	TT	18	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.95	
											100 LS	1900	
											100 LD	1800	
8.25 - 16	TT	8	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	4.25	
											100 LS	1350	
											100 LD	1275	
8.25 - 16	TT	16	-	IND	238	863	-	-	6.50 H	6.00 G	km/h / bar	8.40	
											40 LS	2130	
											40 LD	2015	
8.25 - 16	TT	18	-	IND	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.95	
											100 LS	1900	
											100 LD	1800	
8.25 - 16	TT	16	134A8	TR TR	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.60	
											40	2120	
9.00 - 16	TT	12	-	STD	265	925	-	-	6.50 H	6.00 G	km/h / bar	5.15	
											30	1900	

Technology

Reinforced Carcass
Performance

Cut and Chip Resistance

High Load Capacity

STD: Standard - IND: Industrial - TR TR: Tractor Trailer



TRAILER

BK 826

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	6.20
												30	2120
9.00 - 16	TT	14	-	STD	265	925	-	-	6.50 H	6.00 G	30	2120	
9.00 - 16	TT	16	-	STD	265	925	-	-	6.50 H	6.00 G	30	2300	
9.00 - 16	TT	18	-	STD	265	925	-	-	6.50 H	6.00 G	30	2360	
9.00 - 16	TT	16	-	IND	265	925	-	-	6.50 H	6.00 G	30	2300	
9.00 - 16	TT	12	-	SPL	265	925	-	-	6.50 H	6.00 G	30	1900	
9.00 - 16	TT	18	138A6	TR TR	265	925	-	-	6.50 H	6.00 G	30	2360	
9.00 - 16	TT	18	138A8	TR TR	265	925	-	-	6.50 H	6.00 G	30	2360	

Technology



Reinforced Carcass

Performance



Cut and Chip Resistance



High Load Capacity







STD: Standard - IND: Industrial - TR TR: Tractor Trailer - SPL: Special



BK 6060



BK 6060 is a both field- and road-oriented tire for trailers and backhoe loaders in transport as well as digging and loading applications. This block pattern tire provides an extended tire life-cycle.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)	
										Rec.	Alt.			
													7.25	
	9.00 - 16	TT	16	-	IND	255	925	427	2740	6.50 H	6.00 G	30	2300	

IND: Industrial

Technologies



Special Compound

Performance



Durability



On/Off Road





TRAILER

Bias

COLT



COLT is a block pattern tire suitable for transport with trailers and light trucks, both in the field and on the road. COLT ensures extended durability and high performance during the entire product life-cycle.

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 15"	7.50 - 15	TT	12	-	STD	217	790	-	-	6.00	-		km/h / bar	6.00
													100 LS	1385
													100 LD	1315
	7.50 - 15	TT	14	-	STD	217	790	-	-	6.00	-		km/h / bar	6.50
													100 LS	1450
													100 LD	1375
7.50 - 15	TT	16	-	STD	217	790	-	-	6.00	-		km/h / bar	7.50	
												100 LS	1500	
												100 LD	1440	
Ø 16"	7.50 - 16	TT	16	-	IND	212	820	-	-	6.00 G	5.50 F		km/h / bar	8.40
													40	1840

Performance



Durability



High Mileage



Traction

STD: Standard - IND: Industrial



FLOTATION TR 675



FLOTATION TR 675 is best suited for field and road transport. It fits trailers and implement machinery. FLOTATION TR 675 has been engineered to provide outstanding traction, high load capacity and a longer tire life.

Ø 22.5"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)			
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	1.50	2.00	2.40
500/60 - 22.5	TL	12	145 A8/ 142 B	157 A8/ 154 B	STD	515	1181	542	3604	AG 16.00	15.00; 17.00	10 FR	4390	5195	5775	
												20 FR	3950	4675	5200	
												30 FR	3510	4155	4620	
												40 FR	3135	3710	4125	
												50 FR	2820	3340	3750	
												10 DW	3085	3645	4060	
												20 DW	2780	3280	3655	
												30 DW	2470	2920	3250	
												40 DW	2205	2605	2900	
												50 DW	1985	2345	2650	
500/60 - 22.5	TL	16	151 A8/ 148 B	163 A8/ 159 B	STD	515	1181	542	3604	AG 16.00	15.00; 17.00	10 FR	6315	6575	6825	
												20 FR	5685	5915	6145	
												30 FR	5050	5260	5460	
												40 FR	4510	4695	4875	
												50 FR	4060	4225	4375	
												10 DW	4465	4650	4830	
												20 DW	4020	4185	4345	
												30 DW	3575	3720	3865	
												40 DW	3190	3320	3450	
												50 DW	2870	2990	3150	
500/60 - 22.5	TL	20	155 A8/ 151 B	168 A8/ 164 B	DB	515	1181	542	3604	AG 16.00	15.00; 17.00	10 FR	7425	7545	7840	
												20 FR	6685	6790	7055	
												30 FR	5940	6035	6270	
												40 FR	5305	5390	5600	
												50 FR	4775	4850	5000	
												10 DW	5255	5340	5425	
												20 DW	4730	4805	4885	
												30 DW	4205	4275	4340	
												40 DW	3755	3815	3875	
												50 DW	3380	3435	3450	
550/45 - 22.5	TL	20	154 A8/ 150 B	166 A8/ 162 B	STD	543	1070	-	-	AG 16.00	-	10 FR	6270	6860	7420	
												20 FR	5645	6175	6680	
												30 FR	5020	5490	5935	
												40 FR	4480	4900	5300	
												50 FR	4030	4410	4750	
												10 DW	4440	4860	5250	
												20 DW	3995	4370	4725	
												30 DW	3550	3885	4200	
												40 DW	3170	3470	3750	
												50 DW	2855	3125	3350	

STD: Standard; DB: Dual Bead

Performance



Durability



High Load Capacity



Traction





FLOTATION TR 675

Ø 22.5"	Tire size	TYPE	PR	L/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)			
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	1.50	1.80	2.10
550/60 - 22.5	TL	12	148 A8/ 144 B	160 A8/ 156 B	STD	550	1260	547	3640	AG 16.00	-	10 FR	5175	5755	6300	
												20 FR	4655	5180	5670	
												30 FR	4140	4605	5040	
												40 FR	3695	4110	4500	
												50 FR	3325	3700	4000	
												10 DW	3620	4030	4410	
												20 DW	3255	3630	3970	
												30 DW	2895	3225	3530	
												40 DW	2585	2880	3150	
												50 DW	2325	2590	2800	
550/60 - 22.5	TL	16	154 A8/ 150 B	167 A8/ 163 B	STD	550	1260	547	3640	AG 16.00	-	10 FR	6970	7310	7630	
												20 FR	6275	6575	6865	
												30 FR	5580	5845	6105	
												40 FR	4980	5220	5450	
												50 FR	4480	4700	4875	
												10 DW	4795	5025	5250	
												20 DW	4315	4525	4725	
												30 DW	3835	4020	4200	
												40 DW	3425	3590	3750	
												50 DW	3085	3230	3350	

STD: Standard

Performance



Durability



High Load Capacity



Traction

CON TRAILER



CON TRAILER is a trailer tire particularly suitable for port applications. It is the ideal tire for on-and-off-the-road applications. Its robust construction results in high load capacity, whereas its extra-deep tread allows for a better mileage.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar	9.10	8.40
	10.00 - 20	TT	18	-	PORT IND	286	1080	-	-	7.5	7.0; 8.0	40 LS	3535	-
												40 LD	-	3135

PORT IND: Port Industrial

Technologies



Extra Deep Tread

Performance



High Load Capacity



High Mileage



INDUSTRIAL RIB F3



INDUSTRIAL RIB F3 is an agro-industrial rib-pattern tire designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. This tire features an outstanding stubble-resistant compound making it suitable for the most critical operating conditions and ensuring a long tire life-cycle.

INDUSTRIAL MATERIAL HANDLING TIRES

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	3.60
11L - 15 SL	TL	10	114A6	STD	279	813	-	-	8 LB	10 LB	30	1185	
											40	1060	
											km/h / bar		3.60
11L - 15 SL	TL	10	114A6	SR	279	813	-	-	8 LB	10 LB	30	1185	
											40	1060	
											km/h / bar		3.60
11L - 15 SL	TL	12	117A6	STD	279	813	-	-	8 LB	10 LB	30	1290	
											40	1160	
											km/h / bar		4.20
11L - 15 SL	TL	12	117A6	SR	279	813	-	-	8 LB	10 LB	30	1290	
											40	1160	
											km/h / bar		4.20
Ø 16"	11L - 16 SL	TL	10	116A6	STD	279	830	-	-	W 8 L	8 LB; 10 LB; W 10 L	30	1250
												40	1120
												km/h / bar	
11L - 16 SL	TL	10	116A6	SPL	279	830	-	-	W 8 L	8 LB; 10 LB; W 10 L	30	1250	
											40	1120	
											km/h / bar		3.60
11L - 16 SL	TL	12	120A6	STD	279	830	-	-	W 8 L	8 LB; 10 LB; W 10 L	30	1385	
											40	1250	
											km/h / bar		4.40

STD: Standard - SR: Stubble Resistance - SPL: Special

Technologies





Performance



MULTI RIB



MULTI RIB is an agro-industrial tire for soil tillage and transport applications with 2WD tractors and implement machinery. It offers excellent handling throughout its long product life-cycle. Several versions are available for every need: an "aramid belted" version with improved puncture resistance, while the "HD" is made of a special cut-and-chip resistance compound.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
11.00 - 16	TL	12	-	STD	315	930	-	-	W 10 L	W 8;W 8 L	4.10	1550	
											40	1550	
11.00 - 16	TL	12	-	AB HD	315	930	-	-	W 10 L	W 8;W 8 L	4.10	1550	
											40	1550	
11.00 - 16	TL	12	-	HD	315	930	-	-	W 10 L	W 8;W 8 L	4.10	1550	
											40	1550	

STD: Standard - AB HD: Aramid Belted HD - HD: Heavy Duty

Technologies





Performance



RIB F3



RIB F3 is a field-oriented tire designed for 2WD tractors in soil tillage and haulage operations. Some sizes are suitable for transport applications using trailers. The RIB F3 tire is the ideal partner for all operations that require a high level of handling. It has been designed with a hard compound to ensure great durability and stubble resistance.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
9.00 - 16	TT	12	120 A6/ 112 A8	STD	245	878	387	2573	W 8	6.00 F; W 7; W 8 L	30	1400	
											40	1120	
											4.70		
9.00 - 16	TL	12	120 A6/ 112 A8	STD	245	878	387	2573	W 8	6.00 F; W 7; W 8 L	30	1400	
											40	1120	
											4.70		
9.00 - 16	TT	12	120 A6/ 112 A8	HD	245	878	387	2573	W 8	6.00 F; W 7; W 8 L	30	1400	
											40	1120	
											4.70		

STD: Standard - HD: Heavy Duty

Technologies



**Hard
Compound**

Performance



Durability



**Steering
Control**



**Stubble
Resistance**



SAND KING



SAND KING is a block pattern tire specially designed for trailers in transport applications. It provides excellent traction on sandy surfaces and best ground contact.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)		
										Rec.	Alt.		km/h / bar		
Ø 16"	7.50 - 16	TT	8	-	STD	215	820	378	2471	5.50 F SDC	6.00 G		65 LS	4.15	1090
	7.50 - 16	TT	10	-	STD	215	820	378	2471	5.50 F SDC	6.00 G		km/h / bar	5.20	
												65 LS	1215		
7.50 - 16	TT	12	-	STD	215	820	378	2471	5.50 F SDC	6.00 G		km/h / bar	6.20		
											65 LS	1360			
Ø 21"	425 / 90 D - 21 (15.00 - 21)	TT	18	-	STD	420	1332	-	-	11.25	-		km/h / bar	6.55	
													64	4940	

Performance




STD: Standard



SAND MASTER



SAND MASTER is a block pattern tire specially designed for trailers. It provides excellent traction on sandy surfaces and best ground contact.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
7.50 - 16	TT	8	-	STD	215	820	-	-	5.50 F SDC	6.00 G	65 LS	4.15	
											65 LS	1090	
7.50 - 16	TT	12	-	STD	215	820	-	-	5.50 F SDC	6.00 G	65 LS	6.20	
											65 LS	1360	
7.50 - 16	TT	16	-	STD	215	820	-	-	5.50 F SDC	6.00 G	65 LS	7.60	
											65 LS	1550	

Performance


STD: Standard





TRAILER

Bias

SAND STAR



SAND STAR is a block pattern tire specially designed for trailers. It provides excellent traction on sandy surfaces and best ground contact. It also reduces soil compaction.

Ø 13"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
9.00 - 13	TL	6	108 D	STD	245	784	-	-	5.50 F	5.50 WB	65	3.10	
												1000	
9.00 - 13	TT	6	108 D	STD	245	784	-	-	5.50 F	5.50 WB	65	3.10	
												1000	
9.00 - 13	TL	8	116 A8	STD	245	784	-	-	5.50 F	5.50 WB	40 FR LLV	2.75	
												1250	
9.00 - 13	TT	8	116 A8	STD	245	784	-	-	5.50 F	5.50 WB	40 FR LLV	2.75	
												1250	
9.00 - 13	TL	10	119 A8	STD	245	784	-	-	5.50 F	5.50 WB	40 FR LLV	3.25	
												1360	
9.00 - 13	TT	10	119 A8	STD	245	784	-	-	5.50 F	5.50 WB	40 FR LLV	3.25	
												1360	

Performance



Reduced Soil Compaction



Traction on Sand

STD: Standard





TRAILER

Bias

SUPER SAND



SUPER SAND is particularly suitable for trailers operating on sandy surfaces during hot weather conditions. It features high flotation capability and is ideal for all operations requiring a high level of handling.

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
Ø 15"	9.00 - 15	TT	6	-	STD	275	854	-	-	7.00	-	65 LS	2.40
												65 LD	925
Ø 16"	9.00 - 16	TT	8	-	STD	255	885	-	-	6.50 H	6.00 G	65 LS	2.40
												65 LD	975
Ø 20"	14.00 - 20	TT	12	-	STD	385	1225	-	-	10.00 V	10.00 W	65 LS	2.40
												65 LD	2360
												65 LD	2060
Ø 20"	14.00 - 20	TT	16	-	STD	385	1225	-	-	10.00 V	10.00 W	65 LS	4.85
												65 LD	3540
												65 LD	3115
Ø 20"	14.00 - 20	TT	18	-	STD	385	1225	-	-	10.00 V	10.00 W	65 LS	5.85
												65 LD	3965
												65 LD	3490
Ø 20"	16.00 - 20	TT	16	-	STD	415	1305	-	-	10.00 W	-	50	2.40
												65 LD	3650

Performance



Handling & Comfort



Excellent Flotation



Traction on Sand



STD: Standard



TUF LUG



TUF LUG is suitable for trailers and light trucks in transport applications. This tire offers good traction and great durability and ensures a long product life-cycle.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
7.50 - 16	TT	12	-	STD	216	830	-	-	6.00 G	5.50 F	6.20	1400	
											100 LS	1250	
											100 LD		
7.50 - 16	TT	14	-	STD	216	830	-	-	6.00 G	5.50 F	6.90	1500	
											100 LS	1320	
											100 LD		
7.50 - 16	TT	16	-	STD	216	830	-	-	6.00 G	5.50 F	7.60	1600	
											100 LS	1400	
											100 LD		

STD: Standard

Performance



Traction








Durability



RIB 324



RIB 324 has been designed with a special block tread pattern and a large contact area to provide best stability and flotation features on loose soil and sandy terrain. The strong nylon casing and sidewall along with a special tread compound stand for excellent resistance against punctures and wear as well as higher load capacity.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)	
										Rec.	Alt.			
												50	3.50	7300
	66 X 44.00 - 25	TL	20	-	STD	1110	1700	-	-	36.0 TH	-			

Technologies



STD: Standard





TRAILER

Bias

TR 387 IND



TR 387 IND is an industrial tire suitable for industrial trailers and compactors. It features high load capacity and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations using trailers.

Ø 30"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
620/75 - 30 (23.1 - 30)	TL	16	161 A6	DB	605	1675	770	4909	DW 20 A; DW 20 B	-		30	2.30	
												30	4625	
620/75 - 30 (23.1 - 30)	TL	18	164 A6	DB HD	605	1675	-	-	DW 20 A; DW 20 B	-		30	2.60	
												30	5000	
Ø 32"	24.5 - 32	TL	16	164 A6	DB HD	625	1755	790	5226	DH 21	DH 21 B; DH 21 H; DH 21 HB		30	2.10
													30	5000

DB: Dual Bead - DB HD: Dual Bead Heavy Duty

Technologies



Reinforced Bead

Performance



Cut and Chip Resistance



Durability



Heavy Duty



High Load Capacity



TR 678



TR 678 has been specially designed for forestry applications. Its robust lug design provides excellent traction and self-cleaning. The strong casing structure stands for high load capacity whereas its steel belts protect the tire from punctures and damages. TR 678 features a cut-resistant tread compound providing excellent cut-and-chip resistance even on difficult terrains under extreme conditions.

Ø 26.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
Ø 26.5"	600/55 - 26.5	TL	20	172 A2 / 165 A8	SB	605	1350	-	-	AG 20.00	-	40	5150
												10	6300
Ø 28.5"	780/50 - 28.5	TL	24	190 A2 / 182 A8	SB	770	1515	-	-	AG 26.00	-	40	8500
												10	10600
Ø 34"	600/65 - 34	TL	14	164 A2 / 160 A6	SB	610	1644	758	4916	DW 20 B	-	40	2400
												30	4500
												10	5000
	600/65 - 34	TL	16	166 A2 / 162 A6	SB	610	1644	758	4916	DW 20 B	-	40	2600
												30	4750
												10	5300
	600/65 - 34	TL	20	170 A2 / 166 A6	SB	610	1644	758	4916	DW 20 B	-	40	3200
												30	5300
												10	6000
	710/55 - 34	TL	14	168 A2 / 163 A6	SB	700	1640	757	4890	DW 24 B	-	40	2400
												30	4875
												10	5600
	710/55 - 34	TL	20	173 A2 / 168 A6	SB	700	1640	757	4890	DW 24 B	-	40	3200
												30	5600
												10	6500

SB: Steel belted

Technologies

Steel Belted
Performance

Cut and Chip Resistance

High Load Capacity

Self-Cleaning

Traction



TRAILER

Bias

TR 678 IND



TR 678 has been specially designed for forestry applications. Its robust lug design provides excellent traction and self-cleaning. The strong casing structure stands for high load capacity whereas its steel belts protect the tire from punctures and damages. TR 678 features a cut-resistant tread compound providing excellent cut-and-chip resistance even on difficult terrains under extreme conditions.

Ø 22.5"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	4.10
600/40 - 22.5	TL	-	157A8	169A8	DB	615	1085	483	3264	AG 20.00	-	40 FR	5800	
												40 DW	4125	

DB: Dual Bead

Technologies



More Lugs



Steel Belted



Strong Casing

Performance



Cut and Chip Resistance



High Load Capacity



High Puncture Resistance



Self-Cleaning



Traction



TRAILER

Radial

AW 711 IND



AW 711 is a radial implement tire specially designed for modern farming, and suitable for haulage, hay harvesting and soil tillage applications. Thanks to its special tread compound, AW 711 has an extended product life-cycle, whether it is used on soft or hard surfaces. The low rolling resistance during on-road travel ensures significant savings in fuel consumption. Thanks to the VF technology, AW 711 can carry heavy loads at low inflating pressure.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)									
										Rec.	Alt.	km/h / bar									
												0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
265/70 R 16.5 (10 R 16.5)	TL	-	134A8/B	SR	264	773	343	2286	8.25	-	50	680	895	1085	1255	1445	1635	1760	1930	2120	
											40	680	895	1085	1255	1445	1635	1760	1930	2120	
											30	760	1000	1215	1405	1615	1830	1975	2165	2375	
											25	810	1065	1290	1490	1720	1945	2100	2300	2525	
											20	860	1125	1365	1580	1820	2060	2225	2435	2675	
											10	955	1250	1515	1755	2020	2290	2470	2705	2970	
305/70 R 16.5 (12 R 16.5)	TL	-	148A8/B	SR	325	851	371	2552	9.75	-	50	945	1230	1515	1735	2020	2300	2460	2710	2965	3150
											40	945	1230	1515	1735	2020	2300	2460	2710	2965	3150
											30	1060	1380	1695	1945	2260	2580	2755	3040	3320	3530
											25	1125	1465	1800	2065	2400	2740	2925	3225	3525	3750
											20	1195	1550	1910	2185	2545	2900	3100	3415	3735	3970
											10	1325	1720	2120	2430	2825	3220	3440	3795	4150	4410
340/60 R 16.5	TL	-	145A8/B	SR	324	820	368	2476	11	-	50	870	1135	1395	1595	1860	2120	2265	2495	2730	2900
											40	870	1135	1395	1595	1860	2120	2265	2495	2730	2900
											30	975	1270	1560	1790	2080	2375	2535	2795	3055	3250
											25	1040	1350	1660	1905	2215	2525	2695	2975	3250	3455
											20	1100	1430	1755	2015	2340	2670	2855	3145	3440	3655
											10	1220	1585	1950	2235	2600	2965	3170	3495	3820	4060
380/55 R 16.5	TL	-	150A8/B	SR	360	830	372	2500	12	11.75	50	1005	1310	1610	1845	2145	2450	2615	2885	3150	3350
											40	1005	1310	1610	1845	2145	2450	2615	2885	3150	3350
											30	1130	1465	1805	2070	2405	2745	2930	3230	3530	3755
											25	1200	1560	1920	2195	2555	2915	3115	3435	3755	3990
											20	1270	1650	2030	2325	2705	3085	3300	3635	3975	4225
											10	1410	1830	2255	2580	3005	3425	3660	4035	4410	4690
395/55 R 16.5	TL	-	152A8/B	SR	394	838	365	2516	12	-	50	1065	1385	1705	1955	2275	2595	2770	3055	3340	3550
											40	1065	1385	1705	1955	2275	2595	2770	3055	3340	3550
											30	1195	1555	1915	2190	2550	2910	3105	3425	3745	3980
											25	1270	1650	2030	2325	2705	3085	3300	3635	3975	4225
											20	1345	1750	2150	2465	2865	3270	3495	3850	4210	4475
											10	1495	1940	2390	2735	3185	3630	3880	4275	4675	4970

Technologies



Steel Belted



IF Technology



VF Technology

Performance



Durability



Fuel Economy



High Load Capacity



Stubble Resistance

SR: Stubble Resistance





AW 711 IND

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)											
										Rec.	Alt.	km/h / bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.6	
												From 10 to 50	1025	1345	1630	1890	2175	2465	2655	2910	3195	3650	
	VF 410/50 R 16.5	TL	-	153 B	SB	410	835	350	2513	AG 11.75	-												

Ø 17"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM Rec.	RIM Alt.	Load capacity (kg/tire)											
												km/h / bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	
												From 10 to 50	1585	2020	2455	2780	3220	3655	4035	4415	4855	5450	
	VF 480/45 R 17	TL	-	167 A8/B	SB	491	866	363	2644	16.00	-												

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM Rec.	RIM Alt.	Load capacity (kg/tire)												
												km/h / bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	5.0	5.5
												50	1220	1585	1950	2235	2600	2965	3165	3490	3655	3815	4057	4375
	400/60 R 18	TL	-	159 A8/B	SR	394	945	419	5807	14	13													
	440/55 R 18	TL	-	159 A8/B	SR	410	945	432	2893	14	13													
	IF 340/65 R 18	TL	-	153 A8/B	SR	330	899	381	2703	W 11	-													

Ø 19.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM Rec.	RIM Alt.	Load capacity (kg/tire)											
												km/h / bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	5.5
												65	660	855	1045	1170	1365	1535	1705	1850	2045	2285	2430
	15 R 19.5	TL	-	139 D	SR	389	1019	471	3094	11.75	12.75												

Technologies



Steel Belted



IF Technology



VF Technology

Performance



Durability



Fuel Economy



High Load Capacity



Stubble Resistance

SB: Steel Belted - SR: Stubble Resistance



TRAILER

Radial

FL 695



FL 695 has been specifically designed for trailers in construction and transport applications with a unique center block tread pattern. Thanks to its strong casing, FL 695 can carry heavy loads maintaining stability in all conditions and its deep tread ensures optimal self-cleaning during on and off-road applications. Multiple steel cord layers reinforce this pattern against punctures.

Ø 26.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)													
										Rec.	Alt.	km/h / bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.5	5.0	5.5	6.0
600/55 R 26.5	TL	-	173 D	SB	591	1335	620	4090	AG20.00	-	65	-	-	-	2925	3380	3835	4225	4615	5070	5395	5720	6110	6500	
											50	-	-	-	3540	4090	4645	5115	5585	6135	6530	6925	7395	7865	
											40	-	2920	3625	3980	4600	5220	5750	6280	6900	7340	7780	8310	8840	
											30	2455	3240	4025	4420	5105	5795	6380	6970	7660	8150	8640	9230	9815	
											25	2570	3390	4215	4625	5345	6060	6680	7295	8015	8525	9040	9655	10270	
											20	2685	3540	4400	4830	5580	6330	6975	7615	8370	8905	9440	10085	10725	
											10	2925	3865	4800	5265	6085	6905	7605	8310	9130	9715	10300	11000	11700	
650/55 R 26.5	TL	-	178 D	SB	630	1390	630	4242	AG20.00	AG22.00	65	-	-	-	3375	3900	4425	4875	5325	5850	6225	6600	7050	7500	
											50	-	-	-	4085	4720	5355	5900	6445	7080	7535	7990	8535	9075	
											40	-	3370	4185	4590	5305	6020	6630	7245	7960	8470	8980	9590	10200	
											30	2835	3740	4645	5100	5890	6685	7365	8045	8835	9400	9970	10650	11325	
											25	2965	3915	4860	5335	6165	6995	7705	8415	9245	9840	10430	11140	11850	
											20	3095	4085	5075	5570	6435	7305	8045	8790	9655	10275	10890	11635	12375	
											10	3375	4455	5535	6075	7020	7965	8775	9585	10530	11205	11880	12690	13500	
Ø 30.5"	600/60 R 30.5	TL	-	179 D	SB	611	1495	693	4586	AG20.00	-	65	-	-	-	3490	4030	4575	5040	5505	6045	6435	6820	7285	7750
												50	-	-	-	4225	4880	5535	6100	6660	7320	7790	8255	8820	9380
												40	-	3480	4325	4745	5485	6220	6855	7485	8225	8750	9280	9910	10540
												30	2930	3865	4800	5270	6090	6910	7610	8315	9130	9720	10305	11005	11705
												25	3065	4045	5025	5515	6370	7225	7960	8695	9555	10165	10780	11515	12245
												20	3200	4225	5245	5760	6655	7550	8315	9085	9980	10620	11260	12025	12790
												10	3490	4605	5720	6280	7255	8235	9070	9905	10885	11580	12280	13115	13950
710/50 R 30.5	TL	-	177 D	SB	700	1490	691	4553	AG24.00	AG20.00	65	-	-	-	3725	4310	4895	5405	5915	6500	6935	7300			
											50	-	-	-	4510	5215	5920	6540	7160	7865	8395	8835			
											40	-	3675	4470	5065	5860	6655	7350	8045	8840	9435	9930			
											30	3200	4080	4965	5625	6505	7390	8160	8935	9815	10475	11025			
											25	3350	4270	5195	5885	6810	7730	8440	9345	10270	10960	11535			
											20	3495	4460	5425	6145	7110	8075	8915	9760	10725	11445	12045			
											10	3815	4865	5915	6705	7755	8805	9725	10645	11695	12485	13140			

SB: Steel Belted

Technologies



Deep Tread



Strong Casing

Performance



Self-Cleaning



Stability



High Load Capacity



High Puncture Resistance

RIDEMAX FL 690



RIDEMAX FL 690 is a radial flotation and transport tire for tank trucks and trailers. The tire is suitable for 75% on-the-road applications. As a response to the increasing demand for high loads in modern agriculture, BKT has designed this steel-belted tire withstanding very heavy loads and increasing the farmer's productivity. The low rolling resistance contributes to better fuel economy.

Ø 26"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)								
										Rec.	Alt.	km/h / bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	
												50	40	30	25	10	50	40	30	25
28L R 26 (750/65 R 26)	TL	-	176 A8/ 173 B	STD	719	1590	695	4745	DW 25 B	DW 23 B	50	3120	3560	4325	4680	5330	5915	6500		
											40	3410	3885	4725	5115	5825	6465	7100		
											30	3820	4355	5295	5730	6525	7240	7955		
											25	4060	4625	5620	6085	6930	7690	8450		
											10	4775	5440	6615	7160	8155	9050	9940		
Ø 32"	30.5L R 32	TL	-	184 A8/ 181 B	STD	790	1800	806	5430	DH 27 B	DW 27 B	50	3795	4375	5280	5695	6520	7260	7920	8250
												40	4370	5030	6075	6550	7500	8355	9115	9490
												30	4935	5685	6865	7405	8475	9440	10300	10725
												25	5205	5995	7240	7805	8935	9950	10855	11305
												10	6040	6955	8400	9055	10365	11550	12600	13120
800/60 R 32	TL	-	185 D	STD	800	1800	817	5454	DH 27 B	DW 27 B	70	2695	3455	4295	4885	5645	6400	6990	7665	8420
											65	2960	3795	4720	5365	6200	7030	7680	8420	9250
											50	3585	4590	5710	6495	7505	8510	9295	10190	11195
											40	4030	5160	6420	7300	8430	9565	10445	11450	12580
											30	4475	5730	7125	8105	9360	10620	11600	12715	13970
VF 900/65 R 32	TL	-	197 D	STD	930	1986	838	5878	DW 31 B	DW 30 ; TW 30	70	5030	6435	7840	8890	10295	11695			
											65	5530	7070	8610	9770	11310	12850			
											50	6470	8270	10075	11430	13235	15035			
											40	7130	9120	11110	12605	14595	16580			
											10	9065	11595	14125	16020	18550	21075			

STD: Standard

Technologies



Steel Belted



Reinforced Bead



High Speed



Block Pattern

Performance



Road Oriented



Durability



Fuel Economy

MAGLIFT SMOOTH



MAGLIFT SMOOTH has been particularly designed for ground support equipment (GSE), port and industrial trailers operating on smooth surfaces. The tire is made of a special tread compound, which ensures excellent cut and chip resistance and a long tire life. The smooth tread design and its maximum contact area provide extraordinary stability and optimized load distribution even under heavy-duty service conditions. MAGLIFT SMOOTH stands for excellent traction as well as low rolling resistance and low heat built up for improved efficiency. In addition, the specifically designed rim guard ensures protection against wheel damage, whilst the reinforced bead structure ensures best grip and eliminates any slippage risk during operations.

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 15"	300 - 15 (315/70 - 15)	-	-	-	STD	255	820	-	-	8.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5850
													25 STEER WHEEL	4500
Ø 20"	10.00 - 20	-	-	-	STD	254	1015	-	-	7.50 - 20	-		km/h / bar	-
													25 LOAD WHEEL	6000
													25 STEER WHEEL	5000
	10.00 - 20	-	-	-	STD	266	1015	-	-	8.00 - 20	-		km/h / bar	-
													25 LOAD WHEEL	6000
													25 STEER WHEEL	5000
	10.00 - 20	-	-	-	STD	256	1055	-	-	7.50 - 20	-		km/h / bar	-
													25 LOAD WHEEL	6540
													25 STEER WHEEL	5450
	11.00 - 20	-	-	-	STD	256	1055	-	-	8.00 - 20	-		km/h / bar	-
													25 LOAD WHEEL	6540
													25 STEER WHEEL	5450
12.00 - 20	-	-	-	STD	269	1088	-	-	8.00 - 20	-		km/h / bar	-	
												25 LOAD WHEEL	7560	
												25 STEER WHEEL	6300	
12.00 - 20	-	-	-	STD	282	1088	-	-	8.50 - 20	-		km/h / bar	-	
												25 LOAD WHEEL	7560	
												25 STEER WHEEL	6300	
													10 OTHER VEHICLES	6865

STD: Standard

Performance





POWERTRAILER SR 331

POWERTRAILER SR 331 is BKT's brand-new All Steel radial tire specifically designed for trailers and tankers in transport applications. Engineered for both field and road usage, POWERTRAILER SR 331 distinguishes itself with good flotation properties in the fields as well as excellent traction on asphalt or other hard, improved surfaces. The All Steel construction stands for high load capacity, extraordinary casing stability, and an extended tire life.

The special sidewall rib provides exceptional protection against impacts and the effects of tire rubbing, while the hexagonal bead with chafer reinforcement makes sure that the tire perfectly fits on the rim. In addition, the multi-block tread pattern ensures reduced rolling resistance, a uniform contact pressure, and smooth roadability. Thanks to all these features, POWERTRAILER SR 331 is synonym for fuel economy and road comfort.

Ø 22.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)					
										Rec.	Alt.	km/h / bar					
												3.2	3.6	4	4.5	5	5.5
560/60 R 22.5	TL	-	165 D	IMP	555	1245	565	3775	AG 16.00	17.00; AG18.00	10	25	40	50	65	70	
											6860	6020	5180	4610	3810	3465	
											7505	6590	5670	5045	4170	3795	
											8255	7245	6235	5550	4585	4170	
											8810	7735	6655	5925	4895	4455	
											9270	8135	7005	6230	5150	4685	
560/60 R 22.5	TL	-	169 D	IMP	555	1245	565	3775	AG 16.00	17.00; AG18.00	10	25	40	50	65	70	
											6785	5955	5125	4560	3770	3430	
											7410	6505	5600	4985	4118	3745	
											8145	7150	6155	5475	4524	4115	
											8665	7605	6545	5825	4814	4380	
											9185	8065	6940	6175	5104	4645	
9815	8615	7415	6595	5452	4960												
10440	9165	7890	7020	5800	5280												

IMP: Implement

Performance



MILITARY TRUCK





Bias

MT 612



MT 612 has been specially designed for multipurpose use on and off the road. Its strong casing allows carrying heavy loads at high speed whereas its broad lugs provide outstanding traction. The extra tread width ensures excellent flotation on sand and mud.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
14.00 - 20	TT	18	-	STD	390	1265	594	3827	10	-		km/h / bar	6.60
												80 LS	4500
												80 LD	4000
14.00 - 20	TT	20	-	STD	390	1265	594	3827	10	-		km/h / bar	7.60
												80 LS	4875
												80 LD	4375
14.00 - 20	TT	22	-	STD	390	1265	594	3827	10	-		km/h / bar	8.60
												80 LS	5300
												80 LD	4750
16.0/70 - 20	TT	16	147 F	STD	405	1095	520	3327	13.00 T	-		km/h / bar	4.50
												80 LS	3075
												80 LD	2725

Performance



Durability



For Muddy Ground



Traction

STD: Standard





MT 617



MT 617 has been specially designed for military trucks. It is a run-flat tire featuring excellent traction and high puncture resistance. Besides, its sidewall protection contributes to an extended tire life-cycle.

Ø 21"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar		
14.5 - 21	TL	TL	12	-	STD	392	1220	-	-	10	-	km/h / bar	4.80	4.20
												90 LS	3605	-
												90 LD	-	3160
14.5 - 21	TL	TL	12	-	AB	392	1220	-	-	10	-	km/h / bar	4.80	4.20
												90 LS	3605	-
												90 LD	-	3160

STD: Standard - AB: Aramid Belted

Performance



Durability



High Puncture Resistance



Traction



MULTIMAX MT 518



MULTIMAX MT 518 has been specially designed for military trucks. It is a block pattern and steel-belted tire featuring high puncture resistance as well as outstanding stability. Besides, MULTIMAX MT 518 withstands high speed and provides an extended tire life-cycle.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
36 X 12.5 R 16.5	TL	-	129 N	STD	315	902	420	2758	9.75	-		140	4.5	1850

STD: Standard

Technologies



High Speed



Steel Belted

Performance



Durability



High Puncture Resistance



Stability

UNIVERSAL VEHICLE MULTIPURPOSE





UNIVERSAL
VEHICLE
MULTIPURPOSE

 Radial

EARTHMAX SR 33



EARTHMAX SR 33 is a radial tire for multipurpose trucks. Its multi-block tread pattern has been SPLly designed to guarantee extraordinary traction on soft, sandy, or muddy surfaces. EARTHMAX SR 33 provides outstanding stability in addition to best self-cleaning properties. The strong All Steel casing features excellent durability and resistance to snag and punctures.

EARTHMAX
RADIAL OTR TIRES

Ø 20"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
14.00 R 20	TL	-	164/160 J	STD	390	1250	576	3840	10.00	9.0; 10.00 W	7.50	5000	
											100 LS	4500	
											100 LD		
335/80 R 20	TL	-	150 K	STD	335	1047	464	3145	11	-	6.50	3350	
											110		
365/80 R 20 (14.5 R 20)	TL	-	152 K	STD	360	1096	496	3318	11	-	6.20	3550	
											110		
395/85 R 20	TL	-	168 J	STD	394	1184	538	3589	10.00 W	10.00 HF	8.50	5600	
											100		

STD: Standard

Technology



All Steel



Special Compound

Performance



Self-Cleaning



Durability



For Muddy Ground




Traction on Sand





UNIVERSAL
VEHICLE
MULTIPURPOSE



 Radial

EARTHMAX SR 33 PLUS



EARTHMAX SR 33 PLUS is a radial tire with a multi-block tread pattern SPLly designed for exceptional flotation and traction on soft, sandy and muddy surfaces. Its strong All Steel casing and belts provide excellent durability and resistance to snag and punctures. EARTHMAX SR 33 PLUS features excellent self-cleaning properties and provides superior stability.

EARTHMAX
RADIAL OTR TIRES

Ø 20"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	7.60
													
	16.00 R 20	TL	-	173/170 G	STD	448	1310	582	3974	11.25	10.00 W; 10.0	90	6500

STD: Standard

Performance



Traction



Self-Cleaning



Stability



Cut and Chip Resistance



Durability



Multi-Purpose Tires



UNIVERSAL
VEHICLE
MULTIPURPOSE


 Radial

EARTHMAX SR 331



EARTHMAX SR 331 is the BKT new multi-block tread pattern tire specially engineered and designed for multi-purpose trucks and Emergency Response vehicles. The unique tread pattern is essential to maximise ground contact and therefore guarantees excellent handling and comfort in all conditions. This non-directional tire has extraordinary selfcleaning properties. EARTHMAX SR 331 has been designed by BKT to excel in flotation and traction, essential requirements to operate effectively on soft, sandy and muddy soils. Extended durability is ensured by its All Steel strong casing and belt package, which also provide outstanding resistance to snags and punctures.

EARTHMAX
RADIAL OTR TIRES

Ø 21"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	5.90
													
24 R 21	TL	-	176 G	STD	606	1382	628	4294	18.00	-	90	7100	

STD: Standard

Technologies



All Steel



Block Pattern



Larger Footprint

Performance



Traction



Excellent Flotation



Handling & Comfort



Self-Cleaning



Cut and Chip Resistance



Durability



UNIVERSAL
VEHICLE
MULTIPURPOSE

Radial

MULTIMAX MP 525



MULTIMAX MP 525 is an All-Steel multi-purpose radial tire designed for telehandlers, compact loaders, and graders in agro-industrial applications. The tire has been specifically developed to carry heavy loads at higher speeds both on and off the road. Indeed, the large non-directional tread design provides exceptional traction on any surface in addition to excellent self-cleaning properties. The strong sidewall ensures exceptional lateral stability in lift mode, making it the ideal choice for agricultural and material handling operations.

MULTIMAX MP 525 is made of a unique, cut- and-chip-resistant tread compound that stands for a longer tire service life thanks to its extraordinary resistance against any kinds of cuts and punctures.

MULTIMAX
RADIAL MPT TIRES

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)				
										Rec.	Alt.	km/h / bar	3.75		4.00	
													2800	3000	-	-
Ø 18"	405/70 R 18 (15.5/70 R 18)	TL	-	146 J/ 141 B/ 153A2	STD	405	1025	462	3122	13	11;12	100	2800	3000		
												50	2575	-		
												10	3650	-		
Ø 20"	405/70 R 20 (16.0/70 R 20)	TL	-	152 J/ 168A2	STD	405	1076	482	3260	13	12;13 SDC	km/h / bar	6.00			
												100	3550			
												10	5600			
Ø 24"	455/70 R 24	TL	-	154 G/ 154 B/ 165A2	STD	455	1250	571	3794	14	13;DW14L	km/h / bar	4.00	3.75		
												90	3750	-		
												50	-	3750		
												10	-	5150		

STD: Standard

Performance



Traction



Cut and Chip
Resistance



Self-Cleaning



UNIVERSAL
VEHICLE
MULTIPURPOSE

 Radial

MULTIMAX MP 540






MULTIMAX MP 540 has been designed by BKT for multi-purpose vehicles in municipality/maintenance applications. It is suitable for all universal vehicles. Thanks to the All Steel casing. MULTIMAX MP 540 enables to carry heavy loads at high speeds. In addition, its block pattern design provides outstanding stability and durability.

MULTIMAX
RADIAL MPT TIRES

Ø 16"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)						
										Rec.	Alt.	km/h / bar						
Ø 16"	315/55 R 16	TL	-	120 K / 124 F	STD	305	751	354	2325	W10L	11	110	1400					
												80	1600					
												km/h / bar	4.00					
Ø 18"	335/80 R 18 (12.5 R 18)	TL	-	132 K	STD	340	985	446	3000	11	-	110	2000					
												km/h / bar	3.50					
												km/h / bar	5.20					
Ø 20"	275/80 R 20 (10.5 R 20)	TL	-	134 K	STD	270	955	443	2913	W9	9	110	2120					
												km/h / bar	4.0	4.5	5.0	5.5	6.0	6.5
												110	2205	2420	2635	2845	3050	3250
Ø 20"	335/80 R 20	TL	-	149 K	STD	340	1044	492	3258	11	-	100	3250					
												90	3315					
												80	3380					
Ø 20"	365/80 R 20 (14.5 R 20)	TL	-	152 K	STD	365	1086	495	3308	11	-	70	3480					
												km/h / bar	6.25					
												110	3550					
Ø 20"	405/70 R 20 (16.0/70 R 20)	TL	-	152 K	STD	402	1082	490	3295	13	12;13 SDC	110	3550					
												km/h / bar	6.00					
												110	3550					
Ø 24"	405/70 R 24 (16.0/70 R 24)	TL	-	152 J	STD	402	1174	530	3586	13	-	100	3550					
												km/h / bar	5.00					
												100	3550					

Technologies

-  **Block Pattern**
-  **High Speed**
-  **All Steel**

Performance

-  **Stability**
-  **Durability**
-  **High Load Capacity**

STD: Standard



MOBILE CRANE





MOBILE
CRANE

Radial

AIROMAX AM 27



AIROMAX AM 27 is the ideal road-oriented tire for construction applications with cranes. It features extraordinary heat resistance and outstanding riding comfort. AIROMAX AM 27 is a high-speed tire particularly suitable for all operations requiring a high level of handling.

AIROMAX
RADIAL CRANE TIRES

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)								
										Rec.	Alt.									
												km/h / bar	9.00							
	385/95 R 24 (14.00 R 24)	TT	-	170 F	STD	372	1363	626	4175	10.00 W	-	80	6000							
												km/h / bar	9.00							
												80	6000							
												km/h / bar	9.00							
												30	8500							
												40	7750							
												50	7500							
												60	7300							
												70	7100							
												80	6700							
												90	6300							
												100	5600							
												km/h / bar	9.00							
												30	12350							
												40	11800							
												50	11200							
												60	10650							
												70	9500							
												80	7800							
												90	6650							
												100	5700							
												km/h / bar	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00
												80	5600	5800	6000	6300	6500	6700	6900	7100

Technologies



High Speed

Performance



High Load Capacity



Handling & Comfort



Heat Resistance



Road Oriented

STD: Standard



MOBILE
CRANE

Radial

AIROMAX AM 543



AIROMAX AM 543 is the ideal tire for construction applications with cranes. It shows outstanding traction and high stability. As crane tires are subject to particular stress and extreme usage conditions, AIROMAX AM 543 has been designed for providing excellent heat resistance. Besides, it is suitable for all operations requiring a high level of handling.

AIROMAX
RADIAL CRANE TIRES

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	9.00
385/95 R 24 (14.00 R 24)	TT	-	170 E	STD	375	1355	627	4156	10.00 W	-	70	6000	

Ø 25"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	9.00
385/95 R 25 (14.00 R 25)	TL	-	170 E	STD	375	1355	627	4156	10.00/1.5	-	70	6000	

445/95 R 25 (16.00 R 25)	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM Rec.	RIM Alt.	Load capacity (kg/tire)		
											11.00/ 1.7 CR ; 11.00/ 1.7 CRL	km/h / bar	9.00
												30	9500
												40	9000
												50	8500
												60	8175
												70	7300
												80	6000
												90	5150
100	4375												

STD: Standard

Technologies



All Steel



High Speed

Performance



Traction



High Load Capacity



Durability





MOBILE
CRANE

Bias

CRANE SPECIAL



CRANE SPECIAL is suitable for pick & carry cranes on rough terrains. The tire is made of a special compound which provides high stability and durability.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	5.75
14.00 - 24	TL	24	-	STD	375	1368	628	4050	10.00 W	-		50	5150	
												50	5150	
14.00 - 24	TT	24	-	STD	375	1368	628	4050	10.00 W	-		50	5150	
												50	5150	
Ø 25"	16.00 - 25	TL	28	-	STD	463	1485	682	4395	11.25/2.0	-		50	6700
													50	6700
	16.00 - 25	TT	28	-	STD	463	1485	682	4395	11.25/2.0	-		50	6700
50													6700	
18.00 - 25	TL	32	-	STD	510	1615	739	4780	13.00/2.5	15.00/2.5		50	8750	
												50	8750	

STD: Standard

Technologies



Special
Compound



High Speed

Performance



Stability





MOBILE
CRANE

 Bias

RM 2002



RM 2002 is suitable for transport operations with trailers and light trucks, both on and off the road. It ensures long durability and top performance along the entire product life-cycle. Its "industrial" version is ideal for pick & carry cranes.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar	7.95	7.25
														
11.00 - 20	TT	16	-	-	STD	302	1101	-	-	8.0	7.5;8.5	100 LS	3250	-
												100 LD	-	2900
												km/h / bar	7.95	7.25
11.00 - 20	TT	16	-	-	IND	302	1101	-	-	8.0	7.5;8.5	100 LS	3250	-
												100 LD	-	2900
												km/h / bar	7.95	7.25
11.00 - 20	TT	18	-	-	IND	302	1101	-	-	8.0	7.5;8.5	100 LS	3350	-
												100 LD	-	3000
												km/h / bar	8.25	7.60
11.00 - 20	TT	18	-	-	STD	302	1101	-	-	8.0	7.5;8.5	100 LS	3350	-
												100 LD	-	3000
												km/h / bar	8.25	7.60
12.00 - 20	TT	18	-	-	STD	315	1145	534	3538	8.5	8.0;9.0	100 LS	3750	-
												100 LD	-	3350
												km/h / bar	7.95	7.25

STD: Standard - IND: Industrial

Performance



Durability







MOBILE
CRANE

 Bias

ROCK STAR (L-4)



ROCK STAR LOADER has been specifically designed for cranes and loaders. In addition to excellent traction, the unique tread compound provides superior cut and chip resistance. ROCK STAR LOADER is a 24-ply-rated tire ensuring outstanding load capacity and extraordinary durability.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)	
										Rec.	Alt.		8.50	9500
														
14.00 - 24	TT	24	-	STD	390	1425	-	-	10.00 WA	10.00 VA	10	8.50	9500	

STD: Standard

Performance



Durability



High Load Capacity



Traction



Cut Resistance

RTG CRANE





RTG
CRANE

Bias

XL GRIP (IND-3)



XL GRIP (IND-3) is a bias-ply tire for RTG cranes in stacking and lifting applications. The tire features a strong casing made of a specially formulated tread compound, which provides an extended tire life-cycle.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
16.00 - 25	TL	32	-	IND	465	1485	682	4395	11.25/2.0	13.00/2.0	10	16875	
											10	16875	
18.00 - 25	TL	32	-	IND	510	1615	739	4780	13.00/2.5	15.00/2.5	10	20250	
											25	18750	
											10	22950	
18.00 - 25	TL	40	-	IND	510	1615	739	4780	13.00/2.5	15.00/2.5	10	24000	
											10	24000	
21.00 - 25	TL	32	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0	10	25650	
											10	25650	
21.00 - 25	TL	36	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0	10	27810	
											10	27810	
21.00 - 25	TL	40	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0	10	29160	
											10	29160	
Ø 29"	24.00 - 29	TL	42	-	IND	656	1994	900	5860	17.00/3.5	-	10	36260
												25	33575
												10	31000
Ø 35"	21.00-35	TL	36	-	IND	580	2020	928	5980	15.00/3.0	-	10	31000
												10	31000

Technologies



Heavy Duty

Performance



Stability



Durability



Hard Surfaces



Cut and Chip Resistance

IND: Industrial





XL GRIP (IND-3)

Ø 35"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
	21.00 - 35	TL	40	-	IND	580	2020	928	5980	15.00/3.0	-	10	9.90 32800
	24.00 - 35	TL	48	-	IND	655	2130	975	6302	17.00/3.5	-	10	10.00 42525

IND: Industrial

Technologies



Heavy Duty

Performance



Stability



Durability



Hard Surfaces



Cut and Chip Resistance





EMPTY CONTAINER HANDLER



EM 937 (IND-3)



EM 937 (E-3) IND is specially designed for empty-container-handling operations in stacking and loading applications. It features excellent durability and a long tire life. EM 937 (E-3) IND is ideal on paved surfaces and for all operations requiring a high level of handling in the port.
*For size 14.00-24 please confirm service rim or consult manufacturer/distributor.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
14.00 - 24	TT	28	-	PORT IND	375	1368	628	4050	10.00 W	-		10	13500	
14.00 - 24	TL	28	-	PORT IND	375	1368	628	4050	10.00 W	-		10	13500	
14.00 - 24	TL	28	-	PORT IND	375	1368	628	4050	10.00 WA	10.00 VA		10	13500	

PORT IND: Port Industrial

Technologies



Heavy Duty

Performance



Handling & Comfort



Stability



Durability



Cut and Chip Resistance





Hard Surfaces

XL GRIP (IND-3)



XL GRIP (IND-3) is a bias-ply tire for empty container handlers in stacking and lifting applications. The tire features a strong casing, which provides great durability and as well as a high stability in lift mode.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
12.00 - 24	TT	24	-	IND	320	1250	585	3710	8.5	8.0		10.00		
												10	10270	
Ø 25"	16.00 - 25	TL	28	-	IND	465	1485	682	4395	11.25/2.0	13.00/2.0		9.00	
													10	15525
	18.00 - 25	TL	32	-	PORT IND	510	1615	739	4780	13.00/2.5	15.00/2.5		9.00	
													10	20250
18.00 - 25	TL	40	-	PORT IND	510	1615	739	4780	13.00/2.5	15.00/2.5		10.00		
												10	22950	

IND: Industrial - PORT IND: Port Industrial

Technologies



Heavy Duty

Performance



Stability



Durability



Hard Surfaces



Cut and Chip Resistance

ROCK GRIP IND-4 (ECH)



ROCK GRIP PORT INDUSTRIAL IND-4 (ECH) is a bias-ply tire designed for Empty container handler in several applications including industrial handling and steelworks. The special ROCK GRIP compound ensure particular heat resistance along with great stability and durability.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
	12.00 - 24	TT	20	-	PORT IND	315	1265	595	3755	8.5	8.0		9.90	
	12.00 - 24	TT	24	-	PORT IND	315	1265	595	3755	8.5	8.0		10.00	
	14.00 - 24	TL	24	-	PORT IND	375	1410	647	4173	10.00 W	-		10.00	
	14.00 - 24	TL	28	-	PORT IND	375	1410	647	4173	10.00 WA	10.00 VA		10.00	
	14.00 - 24	TL	28	-	PORT IND	375	1410	647	4173	10.00 W	-		10.00	
	14.00 - 24	TL	32	-	PORT IND	375	1410	647	4173	10.00 W	-		10.00	
	14.00 - 24	TL	32	-	PORT IND	375	1410	647	4173	10.00 WA	10.00 VA		10.00	
Ø 25"	16.00 - 25	TL	32	-	PORT IND	470	1525	699	4514	11.25/2.0	13.00/2.0		10.00	
	16.00 - 25	TL	36	-	PORT IND	470	1525	699	4514	11.25/2.0	13.00/2.0		10.00	

Technologies



Performance



PORT IND: Port Industrial

ROCK STAR (IND-4)



ROCK STAR PORT IND-4 has been specifically designed for empty container handlers and forklifts. In addition to excellent traction, the unique tread compound provides superior cut and chip resistance. ROCK STAR PORT IND-4 ensures outstanding load capacity and extraordinary durability.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	10.00
14.00 - 24	TT	28	-	PORT IND	390	1425	635	4350	10.00 W	-	10	13500	
14.00 - 24	TL	28	-	PORT IND	390	1425	635	4350	10.00 W	-	10	13500	
14.00 - 24	TT	28	-	PORT IND	390	1425	635	4350	10.00 WA	10.00 VA	10	13500	
14.00 - 24	TL	28	-	PORT IND	390	1425	635	4350	10.00 WA	10.00 VA	10	13500	
14.00 - 24	TL	32	-	PORT IND	390	1425	635	4350	10.00 WA	10.00 VA	10	14175	
14.00 - 24	TT	32	-	PORT IND	390	1425	635	4350	10.00 W	-	10	14175	
14.00 - 24	TT	32	-	PORT IND	390	1425	635	4350	10.00 WA	10.00 VA	10	14175	
14.00 - 24	TL	32	-	PORT IND	390	1425	635	4350	10.00 W	-	10	14175	

Performance



PORT IND: Port Industrial



EMPTY
CONTAINER
HANDLER

Bias

POWER TRAX HD



POWER TRAX HD premium tire is specially designed for equipment in port and underground mining applications. Its deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut and chip resistance, which is particularly suitable for rough and hard surfaces. The specially designed rim guard ensures protection against flats and wheel damage in the rim flange area.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	10.00
12.00 - 20	TT	20	-	STD	320	1150	-	-	8.50	9.0		25 LOAD WHEEL	9230	
												25 STEER WHEEL	7100	
												10 OTHER VEHICLES	9230	
												25 OTHER VEHICLES	7100	
												STATIC SIDE LOADER	10720	
12.00 - 20	TT	20	172A8	IMP	320	1150	-	-	8.50	9.0		km/h / bar	10.00	
												40	6300	
12.00 - 20	TT	28	-	STD	320	1150	-	-	8.50	9.0		km/h / bar	10.00	
												25 LOAD WHEEL	9490	
												25 STEER WHEEL	7300	
												10 OTHER VEHICLES	9490	
												25 OTHER VEHICLES	7300	
STATIC SIDE LOADER	11025													
12.00 - 20	TT	28	173A8	IMP	320	1150	-	-	8.50	9.0		km/h / bar	10.00	
												40	6500	

STD: Standard - IMP: Implement

Technologies





Deep Tread

POWERTRAX HD SMOOTH



POWER TRAX HD SMOOTH is a bias-ply tire specially designed for port and underground mining operations. The special sidewall protection along with a solid tread prevents cut and puncture damages that are common in such demanding environments. When you need to move heavy-duty loads, POWER TRAX HD SMOOTH is your ideal partner.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
12.00 - 20	TT	20	-	STD	320	1150	-	-	8.50	9.0	10.00	25 LOAD WHEEL	9230
											7100	25 STEER WHEEL	7100
											9230	10 OTHER VEHICLES	9230
											7100	25 OTHER VEHICLES	7100
											10720	STATIC SIDE LOADER	10720
12.00 - 20	TT	28	-	STD	320	1150	-	-	8.50	9.0	10.00	25 LOAD WHEEL	9490
											7300	25 STEER WHEEL	7300
											9490	10 OTHER VEHICLES	9490
											7300	25 OTHER VEHICLES	7300
											11025	STATIC SIDE LOADER	11025

STD: Standard

Technologies



Heavy Duty



Extra Deep Tread

Performance



Durability



Stability



Cut and Chip Resistance





EMPTY
CONTAINER
HANDLER

 Bias

POWER TRAX



POWER TRAX is a premium tire specially designed for heavy duty service on port trailer, empty container handler or ECH and underground mining machineries. Its deep tread and tough casing provide exceptional durability, minimizing the risk of punctures and accidental damage. POWER TRAX is the ideal tire for hard and tough operations, thanks to the unique tread compound which provides excellent resistance to cuts and chip.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
12.00 - 20	TT	20	176A5	STD	320	1150	-	-	8.50	9.0		10.00		
												25 LOAD WHEEL	9230	
												25 STEER WHEEL	7100	
												10 OTHER VEHICLES	9230	
												25 OTHER VEHICLES	7100	
STATIC SIDE LOADER	10720													

Technologies



Deep Tread



Heavy Duty



Strong Casing

Performance



Cut and Chip Resistance



Durability

REACH STACKER



PORTMAX PM 90



PORTMAX PM 90 has been specially designed for reach stackers in several applications including industrial handling and steelworks. It is an All Steel radial tire that provides great durability and stability. Its special antistatic tread compound ensures particular heat resistance and an extended tire life-cycle. PORTMAX PM 90 offers reduced rolling resistance improving fuel economy.

Ø 25"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
	18.00 R 25	TL	***	207A5	IND	495	1655	730	5024	13.00/2.5	-		25	17500
	18.00 R 33	TL	***	214A5	IND	485	1845	857	5624	13.00/2.5	13.00/2.50 IF		25	21200

IND: Industrial

Technologies



Special Antistatic Compound

Performance



Stability



Durability



Heat Resistance





Fuel Economy

PORT KING CLASSIC



PORT KING CLASSIC is BKT's latest-generation port tire, which has been specially engineered for container handling equipment. The tire ensures maximum operating efficiency and exceptional stability in lift mode. Thanks to its strong nylon casing, PORT KING CLASSIC stands out for higher load capacity minimizing the risk of impact breaks, snags, and punctures. The new wear-resistant compound has been developed to ensure an extended product life-cycle, and to provide the best return on investment.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)	
										Rec.	Alt.		10.00	22950
														
18.00 - 25	TL	40	-	IND	528	1675	765	4955	13.00 / 2.5	15.00 / 2.5	10	10.00	22950	

IND: Industrial

Technologies








Performance



PORT KING PLUS



PORT KING PLUS has been specially designed for reach stackers in intermodal/logistics applications. Its deep tread with sturdy lugs along with the special compound provides an extended tire life-cycle. It is also available with a Groove Crack Resistant tread Compound (GCRC).

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
										km/h / bar			
												10.00	
18.00 - 25	TL	40	-	GCRC	528	1675	765	4955	13.00 / 2.5	15.00 / 2.5		10	22950

GCRC: Groove Crack Resistance Compound

Technologies



Special
Compound



Deep Tread

Performance



Durability











CONTAINER KING



CONTAINER KING has been designed for reach stackers in intermodal transport and logistics applications. This extraordinary tire is made of a highly wear-and-tear-resistant tread compound which minimizes tread cracks. CONTAINER KING ensures an extended tire life-cycle plus exceptional stability in lift mode.

CONTAINER KING
P O R T T I R E S

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	10.00
													10	10270
	12.00 - 24	TT	24	-	IND	330	1285	-	-	8.5	8.0		10	10270

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	10.00
													10	22950
	18.00 - 25	TL	40	-	IND	528	1675	765	4955	13.00/2.5	15.00/2.5		10	22950

Ø 33"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	10.00
													10	27000
	18.00 - 33	TL	40	-	IND	510	1895	852	5820	13.00/2.5	-		10	27000

Performance



Stability



Durability

IND: Industrial



ROCK GRIP IND4 (RS)



ROCK GRIP PORT INDUSTRIAL (IND-4) is a bias-ply tire designed for reach stackers in several applications including industrial handling and steelworks. The special ROCK GRIP compounds ensure particular heat resistance along with great stability and durability.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	10.00
	18.00 - 25	TL	40	-	PORT IND	510	1650	753	4885	13.00/2.5	15.00/2.5	10	22950
	18.00 - 33	TL	36	-	PORT IND	510	1887	869	5586	13.00/2.5	-	10	24975
	18.00 - 33	TL	40	-	PORT IND	510	1887	869	5586	13.00/2.5	-	10	27000
	18.00 - 33	TL	44	-	PORT IND	510	1887	869	5586	13.00/2.5	-	10	27810

Technologies



Special
Compound

Performance



Stability



Durability



Heat
Resistance

PORT IND: Port Industrial



SM 54 M (IND-4S)



SM 54 M IND-4S is a modified version of the SM 54 pattern. The flatter tread profile results in a large contact area ensuring a longer tire life-cycle. This tire has been specially designed for empty container handlers and reach stackers in intermodal/logistics applications. SM 54 M features high stability in lift mode as well as a deep and smooth tread design, providing excellent cut resistance.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)	
										Rec.	Alt.		10.00	
	18.00 - 25	TL	40	-	PORT IND	528	1650	750	4880	13.00/2.5	15.00/2.5	10	22950	

Ø 33"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	km/h / bar	Load capacity (kg/tire)	
												Rec.	Alt.
	18.00 - 33	TL	40	-	PORT IND	535	1895	840	5609	13.00/2.5	-	10	27000

PORT IND: Port Industrial

Technologies



Deep Tread

Performance



Cut and Chip Resistance



Durability








Stability



SM 55 (IND-5S)



SM 55 IND-5S has been specially designed for reach stackers and container handlers. Its special abrasion-resistant tread compound provides an extended tire life on asphalt or concrete surfaces and offers excellent stability to vehicles in lift mode.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
	12.00 - 24	TT	20	-	PORT IND					8.5	7.33 V ; 8 ; 8.00 V ; 8.50 V		10	9315
	18.00 - 25	TL	40	-	PORT SPL					13.00/2.5	15.00/2.5		10	22950

PORT IND: Port Industrial - PORT SPL: Port Special

Technologies



Extra Deep Tread



Heavy Duty

Performance



Stability



Durability



Hard Surfaces





Cut and Chip Resistance

SM 54 SUPER (IND-4S)



SM 54 SUPER is the upgraded version of BKT's bestseller pattern SM 54. This new tire still featuring a smooth tread is best suited for reach stackers in intermodal transport and logistics applications. Its flatter tread profile along with an increased tread depth ensures more stability in lift mode as well as a longer product life cycle. Moreover the reinforced casing and bead structure stand for excellent stability. Nonetheless, the tire ensures firmer seating on the rim – a key feature especially when turning at low speeds. The extraordinarily thick sidewalls provide excellent protection against damages such as lateral impacts or side rubbing, a frequent occurrence at congested logistic hubs. SM 54 SUPER is made of a specifically designed tread compound that reduces excessive heat generation, whilst the inner-liner compound provides improved air retention that ensures optimum inflation pressure control during operations.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
18.00 - 25	TL	40	-	IND	515	1671	759	5040	13.00/2.5	15.00/2.5	10	22950	

IND: Industrial

Technologies



Extra Deep Tread



Heavy Duty

Performance



Stability



Durability



High Load Capacity





Heat Resistance

SM 54 IND-4S



SM 54 IND-4S has been specially designed for empty container handlers and reach stackers in intermodal/logistics applications. It features high stability in lift mode as well as a deep and smooth tread design, providing excellent cut resistance to ensure an extended tire life-cycle.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
16.00 - 25	TL	28	-	IND	430	1470	676	4354	11.25/2.0	13.00/2.0	10	9.00	15525
16.00 - 25	TL	32	-	IND	430	1470	676	4354	11.25/2.0	13.00/2.0	10	10.00	16875

IND: Industrial

Technologies



Heavy Duty

Performance



Cut and Chip Resistance



Durability



Hard Surfaces



Stability



STRADDLE CARRIER





STRADDLE CARRIER

Radial

PORTMAX PM 93 PLUS



PORTMAX PM 93 PLUS has been specially designed for straddle carriers in port container handling operations. It is an All Steel radial tire with multilayer steel belts providing a greater stability and durability. Its special antistatic tread compound ensures a particular heat resistance and a longer tire life. PORTMAX PM 93 PLUS offers reduced rolling resistance improving fuel economy.

PORTMAX
RADIAL PORT TIRES

Ø 25"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
										km/h / bar			
												10	
	16.00 R 25	TL	**	200A5	IND	425	1515	699	4582	11.25/2.0	-	25	14000

IND: Industrial

Technologies



Special Antistatic Compound

Performance



Stability



Durability



Heat Resistance



Fuel Economy



TERMINAL TRACTOR



PORTMAX PT 93



PORTMAX PT 93 is a terminal tractor and trailer tire, which has been specifically engineered for heavy-duty operations in terminal environments such as ports and logistic hubs. The special antistatic tread compound ensures excellent wear and heat resistance even under the most demanding operating conditions. PORTMAX PT 93 offers excellent handling features and outstanding grip along with enhanced durability.



Ø 22.5"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
280/75 R 22.5	TL	-	168 A8	IND	282	998	-	-	8.25	9.00	10.00	5600	
											40	5600	
310/80 R 22.5	TL	-	175 A8	IND	308	1070	-	-	9.00	-	10.00	6900	
											40	6900	
315/60 R 22.5	TL	-	170 A8	IND	307	965	-	-	9.75	9.00	10.00	6000	
											40	6000	

IND: Industrial

Technologies



Special Antistatic Compound

Performance



Durability



Comfort



Heat Resistance



TOWTRACTOR



LIFTMAX LM 63



LIFTMAX LM 63 has been specially developed for industrial and logistics operations. The 3-rib tread design provides low rolling resistance with good wet grip and uniform tread wear with better handling. It is an All Steel radial tire with multilayer steel belts offering lower vibration as well as enhanced stability and comfort.

Ø 8"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	10.00
Ø 8"	180/70 R 8 IMP (18 X 7 R 8)	TL	-	120 A8	STD	170	460	-	-	4.33R	-	40	1400
	180/70 R 8 (18 X 7 R 8)	TL	-	125 A5	STD	170	460	-	-	4.33R	-	25	1650
Ø 9"	6.00 R 9	TL	-	121 A5	STD	160	542	-	-	4.00 E	-	km/h / bar	10.00
												25	1450
Ø 10"	6.50 R 10	TL	-	128 A5	STD	176	592	-	-	5.00F	5.50 F	km/h / bar	10.00
												25	1800
Ø 12"	7.00 R 12	TL	-	136 A5	STD	195	675	-	-	5.00 S	-	km/h / bar	10.00
												25	2240
Ø 15"	7.00 R 15	TL	-	143 A5	STD	198	738	-	-	5.50	5.00	km/h / bar	10.00
												25	2725
Ø 15"	8.25 R 15	TL	-	153 A5	STD	240	844	-	-	6.5	7.0	km/h / bar	10.00
												25	3650

Performance



Stability



Comfort

STD: Standard





ROAD RAIL EQUIPMENT



ROCK STAR (SB SPL)



ROCK STAR has been specially designed for equipment being used both on the road and on steel rails. ROCK STAR is a 32-ply-rated tire for outstanding load capacity. The unique tread compound provides superior cut and chip resistance and steel belts stand for durability.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
14.00 - 24	TL	32	-	SB SPL	390	1425	-	-	10.00 WA	10.00 VA	10	14175	

SB SPL: Steel Belted Special

Technologies



Steel Belted

Performance




Cut and Chip Resistance



Durability



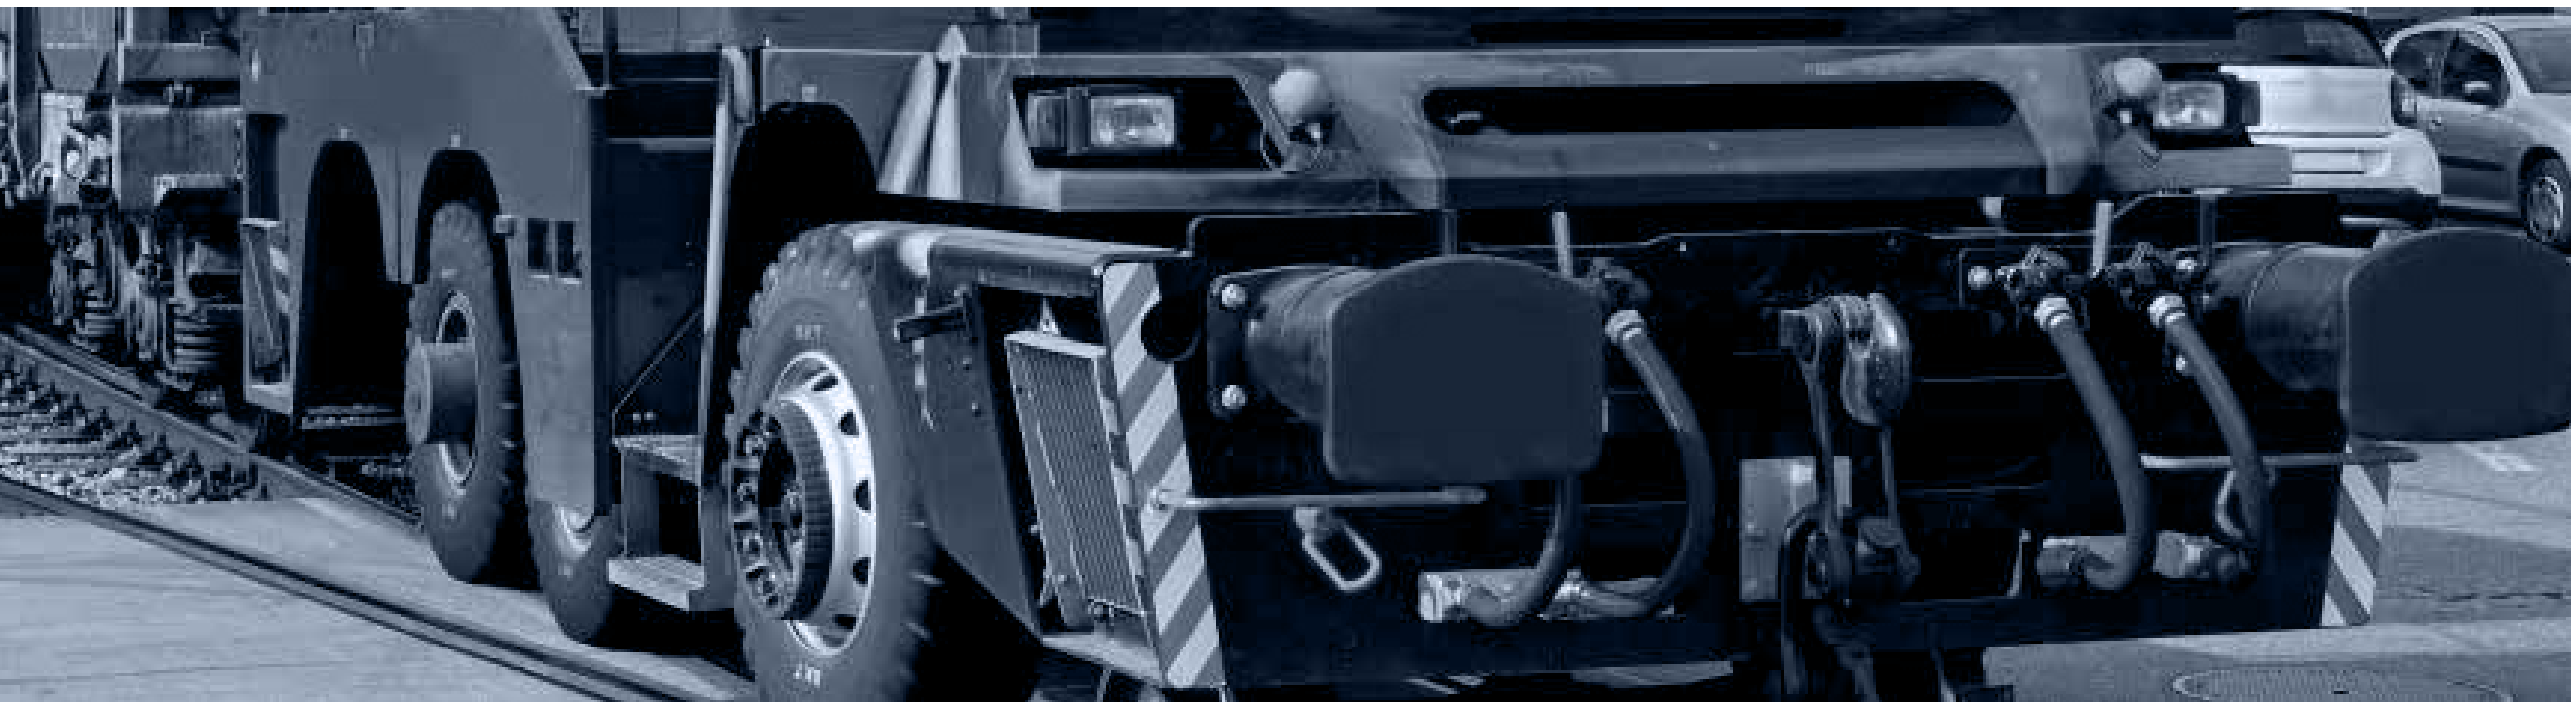

High Load Capacity



LUG STAR



LUG STAR is an industrial tire designed for road-rail excavator applications where exceptional traction is required. It features excellent self-cleaning properties and a very resistant tread compound. The robust casing provides excellent durability.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	5.00
													
10.00 - 20	TT	14	-	STD	280	1080	506	3343	7.5	7.0;8.0	50	2470	
10.00 - 20	TT	18	-	STD	280	1080	506	3343	7.5	7.0;8.0	10	6890	
											25	5300	
											10.00	10.00	

STD: Standard





Performance









Application chart

CONSTRUCTION

 BACKHOE LOADER		 COMPACT LOADER		 LOADER		 COMPACTOR	
TIRE	PAGE	TIRE	PAGE	TIRE	PAGE	TIRE	PAGE
MULTIMAX MP 522	108	MULTIMAX MP 522	164	EARTHMAX SR 22	206	PAC MASTER	246
RT 747 AGRO INDUSTRIAL	114	MULTIMAX MP 527	170	EARTHMAX SR 22 AS	208	PAC MASTER PLUS	250
BK 826	116	RT 747 AGRO INDUSTRIAL	174	EARTHMAX SR 23	210	TR 387	252
BK 6060	120	AT 603	176	EARTHMAX SR 25 PLUS	212	TR 387 IND	258
MP 570	122	AT 621	180	EARTHMAX SR 31	214	TR 390	260
AT 603	124	AT 625	188	GR 288	216	TR 390 IND	262
AT 621	128	CON STAR	190	EM 936 LOADER SPECIAL	218	TR 391	264
AT 625	136	MP 570	194	EM 937	220		
CON STAR	138	MP 590	196	LOADER PLUS (L-3)	224		
TR 459	142	MP 600	198	BK-LOADER 53	228		
TR 461	148	SNOW RIDE (A)	200	ROCK GRIP (L-4)	230		
TR 463	152	MULTIMAX MP 525	202	XL GRIP (L-3)	232		
EM 937 (L)	154			SNOW RIDE (B)	238		
XL GRIP	158			SNOW RIDE PLUS	240		
				ROCK STAR (L-4)	242		

- RADIAL TIRES
- BIAS TIRES

 EXCAVATOR		 GRADER		 SKID STEER		 MOBILE CRANE	
TIRE	PAGE	TIRE	PAGE	TIRE	PAGE	TIRE	PAGE
EM 933 SUPER	268	EARTHMAX SR 22	294	GIANT TRAX	306	AIROMAX AM 27	540
EM 934	270	EARTHMAX SR 22 AS	296	MUD POWER HD	308	AIROMAX AM 543	542
EM 936	272	EARTHMAX SR 23	298	JUMBO TRAX HD	310	CRANE SPECIAL	544
EM 936 SUPER	276	EARTHMAX SR 25 PLUS	300	SKID POWER	312	RM 2002	546
EM 938	278	MULTIMAX MP 525	302	SKID POWER (CHEVRON)	316	ROCK STAR (L-4)	548
EM 939	280			SKID POWER HD (A)	318		
TR 678	282			SKID POWER HD (B)	326		
TR 678 IND	284			SKID POWER SK	328		
MP 570	286			SKID POWER PLUS	330		
LUG STAR	288			SNOW RIDE (A)	332		
MAGLIFT EXCAVATOR	290			SURE TRAX HD	334		
				SKID MAX SR-SKIDDER	336		
				POWER TRAX HD (SS)	338		



Application chart

INDUSTRIAL HANDLING



FORKLIFT

TIRE	PAGE
LIFTMAX LM 81	42
FL 252	48
MP 590	50
PL 801	52
POWER TRAX HD	62
POWER TRAX HD SMOOTH	70
SNOW GRIP	72
SUPER TRAX HD	74
MAGLIFT	76
MAGLIFT ECO	92
MAGLIFT PREMIUM	98
MAGLIFT ECO RIB	100
MAGLIFT RIM GUARD	102
MAGLIFT GROSS	104

- RADIAL TIRES
- BIAS TIRES
- SOLID TIRES

AGRO-INDUSTRIAL



TELEHANDLER

TIRE	PAGE
MULTIMAX MP 569	342
MULTIMAX MP 522	344
MULTIMAX MP 527	350
MULTIMAX MP 529	354
RT 747 AGRO INDUSTRIAL	356
AS 504	358
CON STAR	410
GRIP STAR	414
LIFT STAR PLUS	416
MP 567	418
MP 590	428
MP 600	430
TR 461	434
EM 936	438
EM 936 LOADER SPECIAL	442
MULTIMAX MP 525	444



Application chart

TRANSPORT

LIGHT TRUCK		LOW PLATFORM		TRAILER		MILITARY TRUCK		UNIVERSAL VEHICLE MULTIPURPOSE	
TIRE	PAGE	TIRE	PAGE	TIRE	PAGE	TIRE	PAGE	TIRE	PAGE
LT TR 182	448	IT 400	456	LIFTMAX LM 63	464	MT 612	520	EARTHMAX SR 33	528
TUF LUG	450	LP 450	458	PORTMAX PT 93	466	MT 617	522	EARTHMAX SR 33 PLUS	530
MULTIMAX MP 519	452	MULTIMAX SR 261	460	BK 826	468	MULTIMAX MT 518	524	EARTHMAX SR 331	532
				BK 6060	472			MULTIMAX MP 525	534
				COLT	474			MULTIMAX MP 540	536
				FLOTATION TR 675	476				
				CON TRAILER	478				
				INDUSTRIAL RIB F3	482				
				MULTI RIB	484				
				RIB F3	486				
				SAND KING	488				
				SAND MASTER	490				
				SAND STAR	492				
				SUPER SAND	494				
				TUF LUG	496				
				RIB 324	498				
				TR 387 IND	500				
				TR 678	502				
				TR 678 IND	504				
				AW 711 IND	506				
				FL 695	510				
				RIDEMAX FL 690	512				
				MAGLIFT SMOOTH	514				
				POWERTRAILER SR 331	516				

- RADIAL TIRES
- BIAS TIRES
- SOLID TIRES

PORT

STRADDLE CARRIER		TERMINAL TRACTOR		TOW TRACTOR	
TIRE	PAGE	TIRE	PAGE	TIRE	PAGE
PORTMAX PM 93 PLUS	594	PORTMAX PT 93	598	LIFTMAX LM 63	602

RTG CRANE		EMPTY CONTAINER HANDLER		REACH STACKER	
TIRE	PAGE	TIRE	PAGE	TIRE	PAGE
XL GRIP (IND-3)	552	EM 937 (IND-3)	558	PORTMAX PM 90	574
		XL GRIP (IND-3)	560	PORT KING CLASSIC	576
		ROCK GRIP IND-4 (ECH)	562	PORT KING PLUS	578
		ROCK STAR (IND-4)	564	CONTAINER KING	580
		POWER TRAX HD	566	ROCK GRIP IND4 (RS)	582
		POWER TRAX HD SMOOTH	568	SM 54 M (IND-4S)	584
		POWER TRAX	570	SM 55 (IND-5S)	586
				SM 54 SUPER (IND-4S)	588
				SM 54 (IND-4S)	590

ROAD RAIL EQUIPMENT	
TIRE	PAGE
ROCK STAR (SB SPL)	606
LUG STAR	608



Load index

Load Index & Speed Symbol

LI	kg	LI	kg	LI	kg	LI	kg
50	190	85	515	120	1400	155	3875
51	195	86	530	121	1450	156	4000
52	200	87	545	122	1500	157	4125
53	206	88	560	123	1550	158	4250
54	212	89	580	124	1600	159	4375
55	218	90	600	125	1650	160	4500
56	224	91	615	126	1700	161	4625
57	230	92	630	127	1750	162	4750
58	236	93	650	128	1800	163	4875
59	243	94	670	129	1850	164	5000
60	250	95	690	130	1900	165	5150
61	257	96	710	131	1950	166	5300
62	265	97	730	132	2000	167	5450
63	272	98	750	133	2060	168	5600
64	280	99	775	134	2120	169	5800
65	290	100	800	135	2180	170	6000
66	300	101	825	136	2240	171	6150
67	307	102	850	137	2300	172	6300
68	315	103	875	138	2360	173	6500
69	325	104	900	139	2430	174	6700
70	335	105	925	140	2500	175	6900
71	345	106	950	141	2575	176	7100
72	355	107	975	142	2650	177	7300
73	365	108	1000	143	2725	178	7500
74	375	109	1030	144	2800	179	7750
75	387	110	1060	145	2900	180	8000
76	400	111	1090	146	3000	181	8250
77	412	112	1120	147	3075	182	8500
78	425	113	1150	148	3150	183	8750
79	437	114	1180	149	3250	184	9000
80	450	115	1215	150	3350	185	9250
81	462	116	1250	151	3450	186	9500
82	475	117	1285	152	3550	187	9750
83	487	118	1320	153	3650	188	10000
84	500	119	1360	154	3750	189	10300

LI	kg	LI	kg	LI	kg
190	10600	200	14000	210	19000
191	10900	201	14500	211	19500
192	11200	202	15000	212	20000
193	11500	203	15500	213	20600
194	11800	204	16000	214	21200
195	12150	205	16500	215	21800
196	12500	206	17000	216	22400
197	12850	207	17500	217	23000
198	13200	208	18000	218	23600
199	13600	209	18500	219	24300

SPEED SYMBOL

Speed symbol	A2	A4	A6	A8	B	C	D	E	F	G	J	K
Km/h	10	20	30	40	50	60	65	70	80	90	100	110



Tread design



Traction pattern

Used in construction and farm areas for industrial applications, on soft soils and loose grounds where traction is required.



Block pattern

Large supporting surface, good wear and protection. Good traction on soft soils.



Smooth pattern

High stability and long life. Used in severe conditions, hard soils. Very high resistance to damages. Typical use on compactors or heavy industrial machines.



Solid tire

Very closed pattern for improved wear and stability. Used in warehouses and logistic areas.



Rib pattern

Low rolling resistance and wear. Optimal performances on road transfer and port areas.



Semi smooth pattern

High protection against cuts and tears. Good traction on hard surfaces and best stability during lifting mode. Used in port and logistic areas.





Tire construction



Bias tires

Very stiff carcass suggested when high stability is required. Preferred on small machines used in construction areas and big material handling machines.

Bias tires have cord plies that are arranged running diagonally from bead to bead across the tire. Layers overlap forming a crisscross pattern. This design features extraordinary sidewall resistance, puncture resistance and high load capacity.



Radial tires

Suggested when the machine covers high distances. Wider footprint area guarantees better wear, traction and lower rolling resistance with a better fuel consumption compared to Bias tires. Radial tire structure helps heat dissipation on heavy operations and protects against punctures. Better comfort during operation.

Radial tires have cord plies that are arranged running radially from bead to bead around the tire. Sidewall and tread have independent functional features providing more flexibility, great performance, durability, and fuel economy.





Tire markings

READING YOUR TIRE

This section is intended for operators from the agricultural, industrial or earthmoving sectors. It contains useful information about specific Off-Highway tire features as well as some recommendations for maintenance and storage.

The main information about your tire can be found right on the tire. You just need to know how to read it.



- 1. Sub brand name
- 2. Type of compound
- 3. TRA Code
- 4. Safety warning
- 5. Tire size

- 6. Ply rating, Load & speed index, Load, speed, pressure details
- 7. Type of tire
- 8. Tire serial code
- 9. Cord fabric
- 10. Brand Name

These are the main parameters for measuring a tire:

OD - OVERALL DIAMETER

This parameter is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

LOAD INDEX

The load index is a numeric code that defines the tire's maximum loading capacity in kg. For each tire type/size, the loading capacity is always related to a specific inflation pressure as defined by ETRTO standards and manufacturer specifications.

SW - SECTION WIDTH

This parameter indicates the outer sidewall distance without taking into consideration the prominences due to tire code marking. The section width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

SPEED CODE

The speed code is a symbol that indicates the maximum speed admitted at the given load index, following any other specific conditions defined by the tire manufacturer.

OW - OVERALL WIDTH

This parameter indicates a tire's section width at its largest point including all prominences such as tire code marking, sidewall lettering, tire brand, etc. The overall width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

SH - SECTION HEIGHT


This parameter indicates the vertical section of the tire. It is calculated based on the overall diameter less the rim diameter divided by two.

SLR - STATIC LOADED RADIUS

This parameter indicates the vertical distance between the ground and the tire rotation axis. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.

SLW - STATIC LOADED WIDTH

This parameter indicates the outer distance between the tire sidewalls. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.

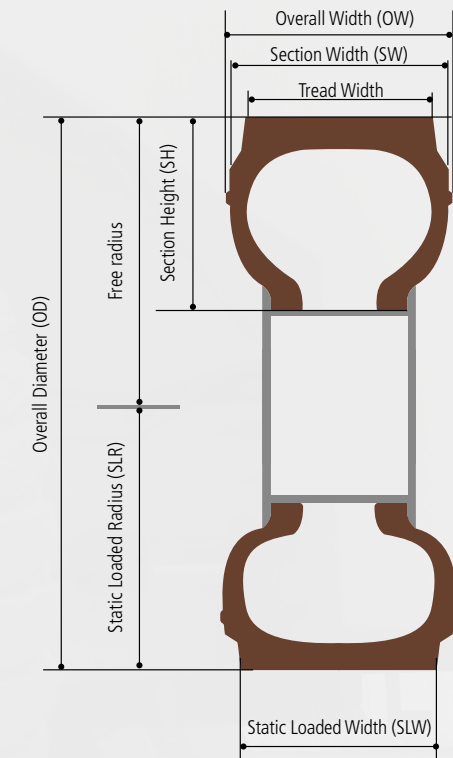



Tire transportation & storage

TIRE TRANSPORTATION

BKT tires are designed for the most differing applications in agriculture and manifold industrial sectors. Many Off-Highway tires are very heavy and difficult to be transported. Wrong transportation of a tire can cause serious damage. When transporting a tire, particular attention must be paid to make sure that neither the bead nor the inner part of the tire are damaged. Even the slightest damage of the bead can cause permanent damage due to air leakage resulting in tire underinflation and possible separation of the tire components.


In order to reduce the risk of damages or problems caused by wrong tire transportation or handling to a minimum, it is highly advised to observe the following recommendations:

Do not lift the tire with a crane hook by leverage on the bead.

Use large fibered straps, rubber slings or specific belts.


Do not use ropes, steel slings or chains.

Use a forklift for transport. The tire is to be lifted under the tread and not on the bead.

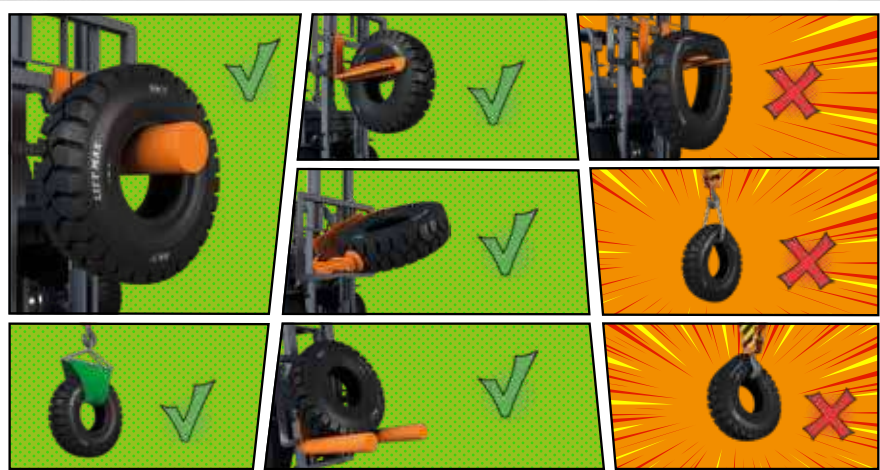

TIRE STORAGE

Whatever your field of application is – agriculture, earthmoving, industry, or else - Off-Highway tires are to be stored in a cool and dry place, away from direct sunlight, electric motors, oils, fuels, resins and other volatile substances in order to avoid any alteration of the chemical-physical features. Should this not be possible, at least protect your tires with a waterproof tarpaulin to avoid contact with ultra-violet rays and bad weather. Tires are to be placed vertically side by side. Do not stack one tire over the other horizontally. Tubes and o-rings must be stocked in their original packing or stored unwrapped on racks or shelves, but never suspended.

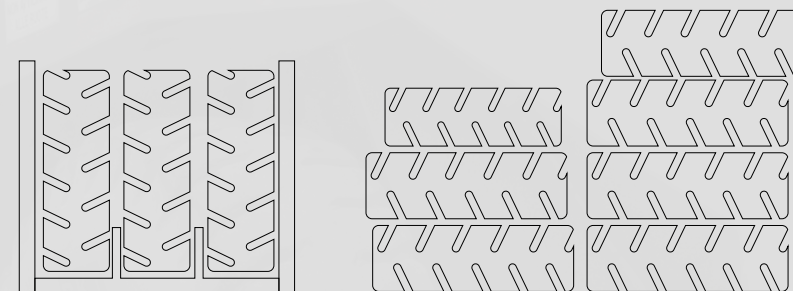

✓ Correct

✗ Incorrect



Sustainability

What are end-of-life tires (ELTs)?

ELTs are tires that have reached the end of their product life-cycle. They are worn-out, cracked or bursted tires, which cannot be retreaded and are no longer suitable for their intended purpose. ELT management is an issue of major concern in line with our focus on sustainability. Recovering ELTs leads to reduced waste. Moreover, it is a valuable resource for fuel or other material. As conscientious tire manufacturer, we wish to provide you with some guidelines about handling, storing, recycling, and recovering ELTs.

How to handle and store ELTs?

Store end-of-life tires in a place that is sheltered against rain, since the accumulation of rainwater would favor the breeding of mosquitoes inside the tire.

Likewise, end-of-life tires should not be stored on wetlands, flood plains, in ravines, or on any other steeply graded surface.

Open-air or uncontrolled burning in any place is harmful to the environment and is therefore forbidden by many legislations.

Lightening rods should be placed at a safe distance from tire piles.

Precautions must be taken against deliberate or accidental igniting of tire stock piles in the storage area.

Install an adequate number of fire-fighting devices. In addition, sand and dirt can be used to cover burning tires; whereas water can be used to wet unburned tires preventing ignition.

It is recommended to maintain an adequate buffer zone in the storage area in order to isolate any deliberate or accidental fire.

Provide for an emergency vehicle access road in each tire storage yard and between tire piles.

A tire is composed of several materials depending on the specific tire type; these include

46-48% rubber

25-28% carbon black


10-12% steel

10-12% oil and vulcanizing agents

3-6% synthetic yarns and textiles

End-of-life tire composition

TIRE LIFE-CYCLE

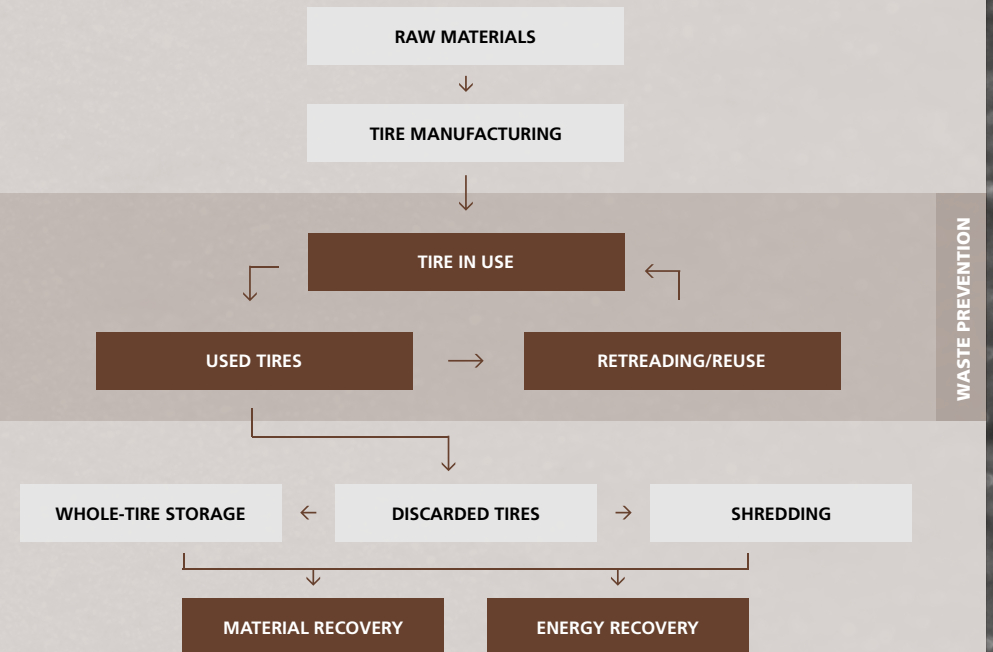

ELT recovery and recycling

When a tire reaches the ELT stage, a proper waste management system is to be applied. It is important that recovery and/or final disposal take place in an environmentally sound manner. ELTs can be destroyed ecologically using the materials obtained for other purposes.

Basically, an ELT can be divided into three product classes:


RUBBER GRANULES

STEEL INSERTS

SYNTHETIC YARN INSERTS AND TEXTILES



Recycling by transforming waste tires into rubber powder


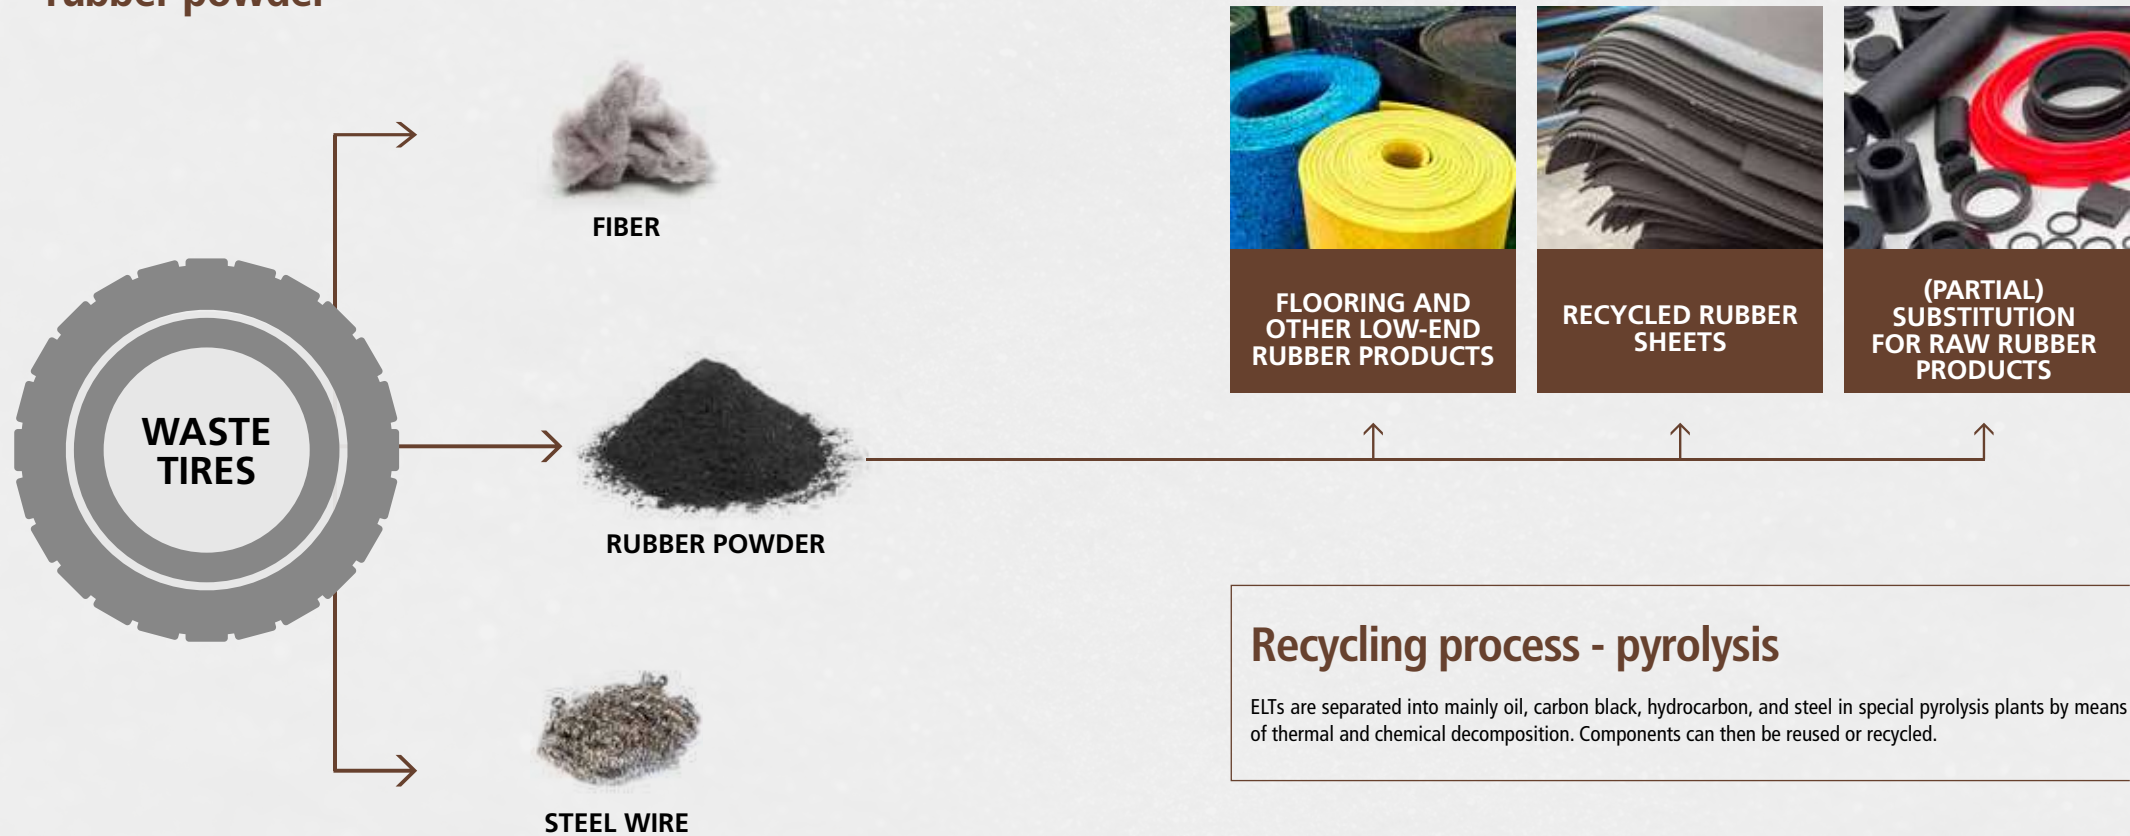


Recycling process - pyrolysis

ELTs are separated into mainly oil, carbon black, hydrocarbon, and steel in special pyrolysis plants by means of thermal and chemical decomposition. Components can then be reused or recycled.

For what purposes can end-of-life tires be used?

ELTs can be a low-cost source of fuel when located near a major fuel consumer, such as a power plant or cement factory. They can also be readily processed for a diverse range of construction projects.

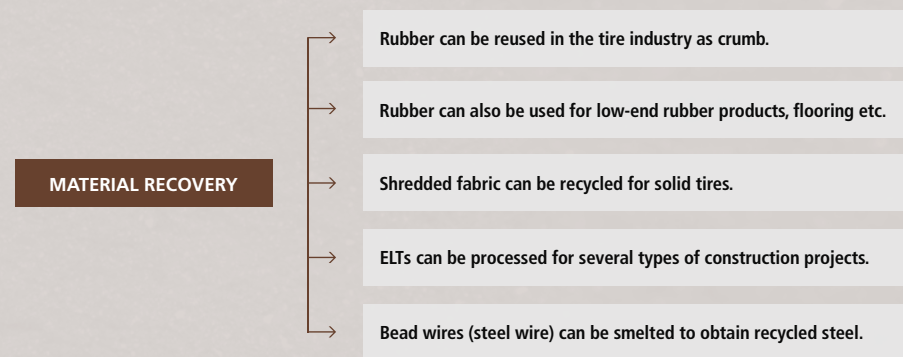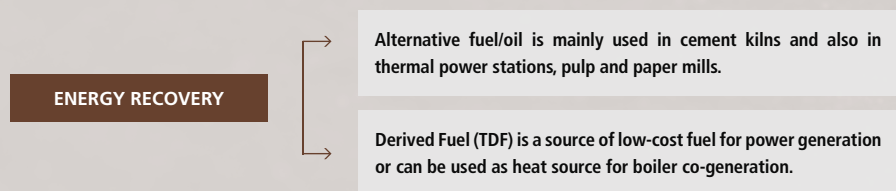



GROWING TOGETHER

Corporate Office

Balkrishna Industries Ltd.

BKT HOUSE, C/15, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai - 400013, India
Tel: (+91) 22-6666 3800 - Fax: (+91) 22-6666 3898/99 - e-mail: info@bkt-tires.com - bkt-tires.com

BKT Europe srl

Viale Della Repubblica,133
20831 Seregno (MB), Italy
Tel: (+39) 0362 33 03 28
(+39) 0362 32 51 07
Fax: (+39) 0362 23 24 72

BKT USA Inc.

202 Montrose West Ave. Suite 240
Copley, Ohio 44321
Tel: (+1) 330 836 1090
Fax: (+1) 330 836 1091
Toll Free: (+1) 888 660 0662

BKT Tires (CANADA) Inc.

55 York Street, Suite 401
Toronto, Ontario M5J 1R7, Canada
Tel: AG/IND (+1) 905 641 5636
OTR (+1) 780 888 5667
Fax: (+1) 416 229 1711



bkt-tires.com